www.wiha.com

wiha
Tools that work for you

EN

Wiha – our goal: your success

- **Your guarantee for quality**
  Winner of the Manufacturing Excellence Awards 2014 as the best SME in Germany.
- **Reliable and dependable**
  German family-owned company with more than 75 years of experience.
- **Your advantage**
  Customised problem-solving for professionals.
- **Cutting-edge technology**
  Award-winninga innovations valued by professionals throughout the world.

What makes your work easier?
Tools that increase your efficiency, reduce costs and preserve your health. This is why Wiha develops, designs and manufactures products that meet the highest functionality, durability and ergonomic demands.

Founded over 75 years ago as a small family-owned business for standard parts and screws, Wiha has grown to become a global company with factories all over Europe, Asia and the United States and are still owner-operated by the Hahn family.

Wiha offers the professional a wide range of high-quality premium tools, characterized by their use of the latest manufacturing technologies, application-oriented innovations, ergonomic superiority, top quality, absolute reliability and long service life. In short, tools that make your work noticeably easier - tools that work for you.

Learn more about Wiha on our website:
www.wiha.com

Wiha visions and values
With responsibility and innovation, Wiha is set for a successful future.

What makes a company successful? Providing excellent products and having a good company culture are key. The high quality of Wiha tools in their form and functionality is confirmed by the many international awards they have received. As an owner-operated family-owned company, we foster a culture of togetherness. From employee development to active customer management, Wiha does everything they can to create optimum working and business conditions and a foundation for sustainable success.

As a member of the BME Compliance Initiative, Wiha complies with a code of conduct which obligates the company to follow business conduct rules, principles of social responsibility and the obligation to promote suppliers, ensuring the lawful behaviour of the company and its employees.

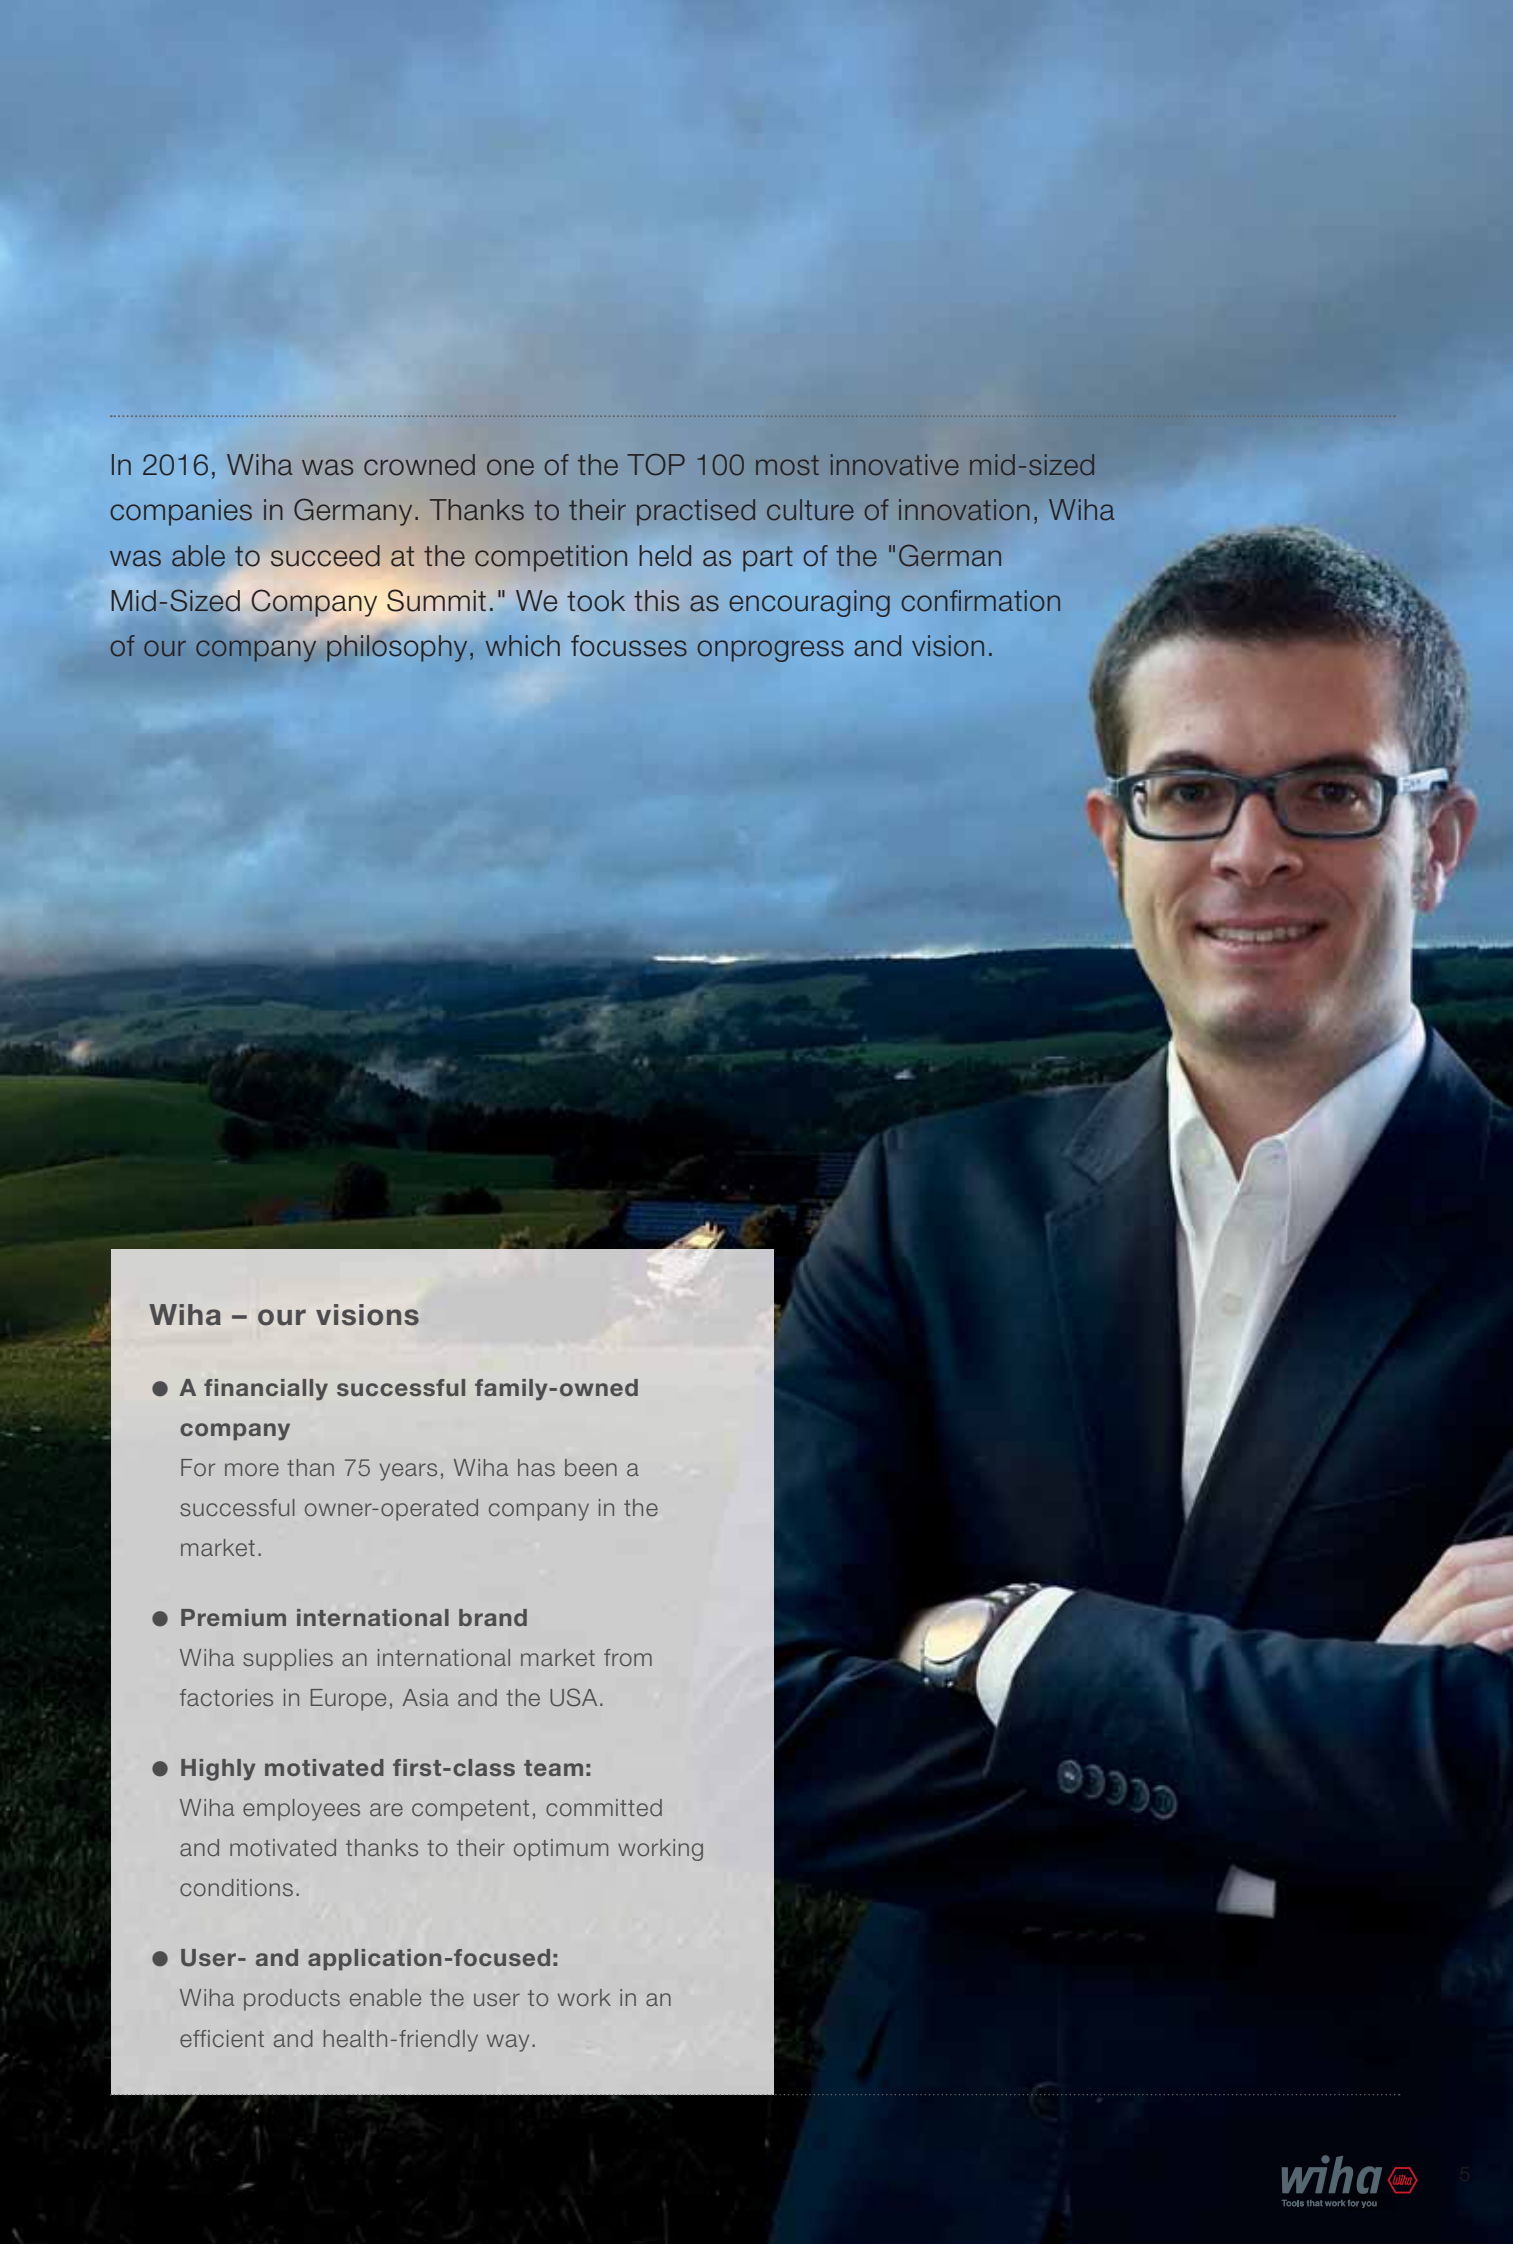

In 2016, Wiha was crowned one of the TOP 100 most innovative mid-sized companies in Germany. Thanks to their practised culture of innovation, Wiha was able to succeed at the competition held as part of the "German Mid-Sized Company Summit." We took this as encouraging confirmation of our company philosophy, which focusses onprogress and vision.

Wiha – our visions

- **A financially successful family-owned company**
  For more than 75 years, Wiha has been a successful owner-operated company in the market.
- **Premium international brand**
  Wiha supplies an international market from factories in Europe, Asia and the USA.
- **Highly motivated first-class team:**
  Wiha employees are competent, committed and motivated thanks to their optimum working conditions.
- **User- and application-focused:**
  Wiha products enable the user to work in an efficient and health-friendly way.

Wiha design awards

Ergonomics, highly prized by all.

2013 / iTorque

product design award 2013

reddot design award winner 2013



2013 / MaxxTor

product design award 2013

2013 / BitBuddy®

product design award 2013

reddot design award winner 2013

Focus Open 2013 Silver

2014 / Magazine Bit Holder LiftUp

product design award 2014

reddot award 2014 best of the best

INDUSTRIE PREIS 2015 BEST OF

To us, positive feedback from people for whom we make our tools is the most rewarding confirmation of our work. All the same, we can also be more than a little proud when the high ergonomic quality of our products is confirmed at the "highest" level, as many of them have been distinguished with coveted design awards. In addition to this, our company and production quality were also honoured with awards. With this praise and confirmation from every direction, it's no wonder that Wiha are on the right track with ergonomic tool concepts and a future-oriented philosophy.

2014 / BiCut®

reddot award 2014
winner

2015 / Bit Holder CentroFix MagicFlip

DESIGN
AWARD
2015

2015 / FlipSelector

reddot award 2015
winner

2017 / 2018 / 26one®

reddot design award
winner 2017

DESIGN
AWARD
2017

Focus Open 2017
Silver

GERMAN
DESIGN
AWARD
WINNER
2018

2018 / speedE®

Focus Open 2018
Special Mention

GERMAN
DESIGN
AWARD
GOLD
2019

Wiha tools with AGR approval

The world's first tools awarded the seal of approval for efficient and health-preserving work.

Ergonomic excellence!
Wiha is the world's first hand tool manufacturer to receive the AGR seal for its Inomic® pliers and ergonomic handle design on screwdrivers. This distinction enjoys broad acceptance by medical professionals

Ergonomic excellence - The Wiha screwdriver handle size concept and Wiha Inomic® pliers handle concept. When you are the first hand tool manufacturer in the world to have products distinguished with the renowned AGR quality seal, it's a sensation. Very few everyday objects are able to pass the stringent tests of the AGR, whose seal enjoys broad acceptance by medical professionals for very good reason.

For years, the AGR have been dedicated to promoting and researching the prevention of back pain and they offer recommendations on products which help to prevent musculoskeletal disorders and back pain.

Wiha have now been officially recognised for their ergonomic screwdriver handle size concept and Inomic® pliers handle concept. To us, this distinction is confirmation of our philosophy: To develop tools enabling the professional to not only work efficiently, but also in a health-preserving way. Wiha's screwdriver handle size concept features four handle sizes and lengths, each optimally suited to its respective fastening or work task to ensure healthy work. The angled "pistol handle" of the Wiha Inomic® pliers handle concept relieves the user's wrist while working.

Both handle concepts help users to reduce, or even fully prevent, discomfort in their musculoskeletal system and pain in their joints and muscles. The result? With Wiha, your work is easier, you don't get fatigued as quickly, you work more efficiently and you simply feel better at the end of the working day. As our campaign logo motto goes: "I feel Wiha!"

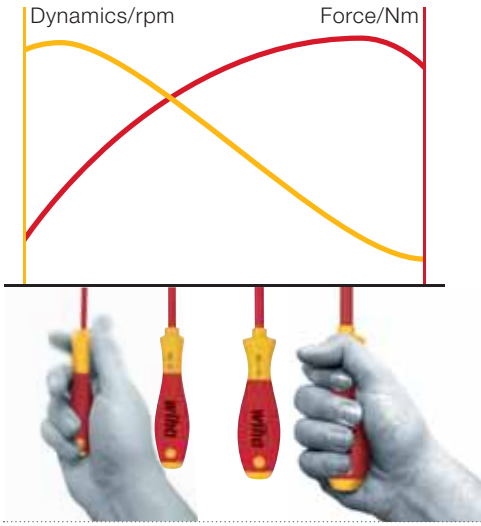

Wiha SoftFinish® handle sizes
Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.

Quick-turning - Motor skills are consistently taken into consideration.

Maximum power transmission, comfortable to use and without loss.

VDE-insulated tools from Wiha

To work safer, more efficiently and with less strain on the body.

Certified safety – from our own safety testing procedure according toIEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulated tools
- insulating safety mechanisms

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- ensure power is switched off
- cover or block off adjacent live components
- secure against reconnection
- earth and short-circuit

As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide applicationoriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, andrandom testing of insulated tools. But with Wiha you don't just work safer, but also healthier and moreefficiently. Specially developed ergonomic geometries ensure comfortable handling that protectsthe body from strain. The result: easier work, less signs of fatigue, more efficiency.

1000 V
IEC 60900

Content

Competence XXL II electrician's tool set
Page 108

Tool set service technician
Page 112

Tool set electrician
Page 113

Tool set electrician
Page 116

E-screwdriver, set 2, speedE®
Page 126

Flashlight with LED, laser and UV light
Page 128

Torque QuickCheck torque testing device
Page 129

Screwdriver and bit set slimVario® screwdriver
Page 132

Screwdriver SoftFinish® electric slimFix
Page 138

Screwdriver SoftFinish®
Page 146

Fine screwdriver PicoFinish
Page 152

Torque screwdriver set TorqueVario®-S electric
Page 162

Torque screwdriver TorqueVario®-S electric
Page 163

Torque screwdriver with T-handle TorqueVario®-S T electric
Page 165

Torque screwdriver iTorque®
Page 168

Screwdriver with bit magazine LiftUp electric
Page 180

Screwdriver with bit magazine LiftUp 26one®
Page 181

Multitool PocketStar
Page 183

Nut driver insert gripper
Page 186

L-key set in ErgoStar holder
Page 196

L-key set in ProStar holder
Page 198

L-key set in ProStar holder
Page 198

L-key set in ErgoStar holder
Page 202

BitBuddy® TY bit set, 29 mm
Page 223

XLSelector T bit set, 50 mm
Page 224

TY bit set 29 mm
Page 224

T bit set, 25 mm
Page 225

Installation pliers TriCut Professional electric
Page 253

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 256

Stripping tool automatic
Page 262

Automatic crimp tool
Page 265

Soft-faced hammer Safety soft/medium hard
Page 295

Soft-faced hammer dead-blow, medium hard
Page 196

Electrician's hammer
Page 301

SoftFinish® dowel racket set with dowels
Page 301

Ratchet wrench set insulated 3/8”
Page 117

Tool set mechanic
Page 121

Tool set ESD
Page 123

Ranges
From page 106

Electro
From page 124

Screwdriver MicroFinish®
Page 155

Screwdriver SoftFinish® ESD
Page 158

Screwdrivers
From page 130

Torque screwdriver TorqueVario®-S
Page 168

Torque screwdriver with T-handle TorqueVario®-S T
Page 172

Torque screwdriver TorqueVario®-S ESD
Page 175

Torque tools
From page 160

Screwdriver with interchangeable blade set SYSTEM 6
Page 187

Screwdriver with interchangeable blade set SYSTEM 4
Page 191

Screwdriver with interchangeable blade set SYSTEM 4 ESD
Page 193

Multitools
From page 178

L-key set in ProStar holder
Page 203

L-key with T-handle ComfortGrip
Page 204

L-key with key handle
Page 206


L-keys
From page 194

Y bit set, 25 mm
Page 236

Bit Professional 1/4"
Page 236

Bit holder CentroFix Force mechanically lockable
Page 246

Bits
From page 220

Professional BiCut® high-performance diagonal cutters with DynamicJoint®
Page 268

Pliers wrench Classic
Page 275

Circlip pliers Classic with MagicTips®
Page 278

Pliers
From page 250

Electrician's spirit level
Page 302

Electrician's Longlife® folding ruler, 2 m
Page 303

Striking and measuring tools
From page 292

Information
From page 304

Competence XXL II electrician's tool set
assorted 115-pcs. in case
Order-No. 42069
More information: Page 108

Further information:

Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The correct torque protects material from damage and ensures no additional follow-up work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protects your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Trolley with stable in-line rollers allow easy and stress-free transportation of tools to the work area. **Increases your efficiency:** A comprehensive tool assortment, always providing you with the right tool when it is needed. The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.

VDE-certified tools

Insulated tools are essential for all work on or around live components.

- Wiha VDE-tested tools are subject to stringent safety test procedures.
- All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.
- Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

9300-702

Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The right tool protects you from damaging materials and avoids subsequent work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protects your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Carry belt enables the simple transport of the tool case and keeps hands free for other materials. **Increases your efficiency:** A comprehensive tool assortment, always having the right tool at hand when needed. The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.

Tool set electrician Competence XL assorted 80-pcs. in case
Order-No. 40523
More information: Page 110

The perfect complement:

Torque screwdriver set TorqueVario®-S electric
Order-No. 36791
More information: Page 162

E-screwdriver, set 2, speedE®
Order-No. 41912
More information: Page 20, 21, 126

Further information:

Protects your health: Recommended by doctors and therapists Fixing by hand with a deft touch. **Offers you full protection:** **Increases your speed:** Work completed twice as fast thanks to a with protection function to prevent damage to materials (max.

Focus Open 2018
Special Mention

GERMAN DESIGN AWARD GOLD 2019

at German Campaign for Healthier Backs. **Increases your control:** slimBits tested at 10,000 V AC and approved for 1,000 V AC. 3-step process. **Protects your material:** Electric screw fastening 0.4 Nm).

Wiha speedE®

E-screwdriver speedE®

- Power-assisted screw-driving halves working time.
- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.
- Final screw tightening can then be carried out by hand.
- Recommended by doctors and therapists.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.

E-screwdriver, set 2, speedE®

590 T102

Increases your speed: Work completed twice as fast thanks to a 3-step process. **Protects your material:** Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm). **Increases your control:** Fixing by hand with a deft touch. **Offers you full protection:** slimBits tested at 10,000 V AC and approved for 1,000 V AC. **Protects your health:** Recommended by doctors and therapists at German Campaign for Healthier Backs.

E-screwdriver, set 2, speedE®
Mixed 13 pcs in L Boxx Mini with slimBits, easyTorque adapter, batteries and EU charger
Order-No. 41912
More information: Page 126

Further information:

The perfect complement:

Screwdriver with bit magazine LiftUp electric
Order-No. 41234
More information: Page 180

Flashlight with LED, laser and UV light
Order-No. 41286
More information: Page 128

Product video:

Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. **Increases your safety:** Power-on time of 2 seconds prevents the laser being activated by accident. **Increases your efficiency:** Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

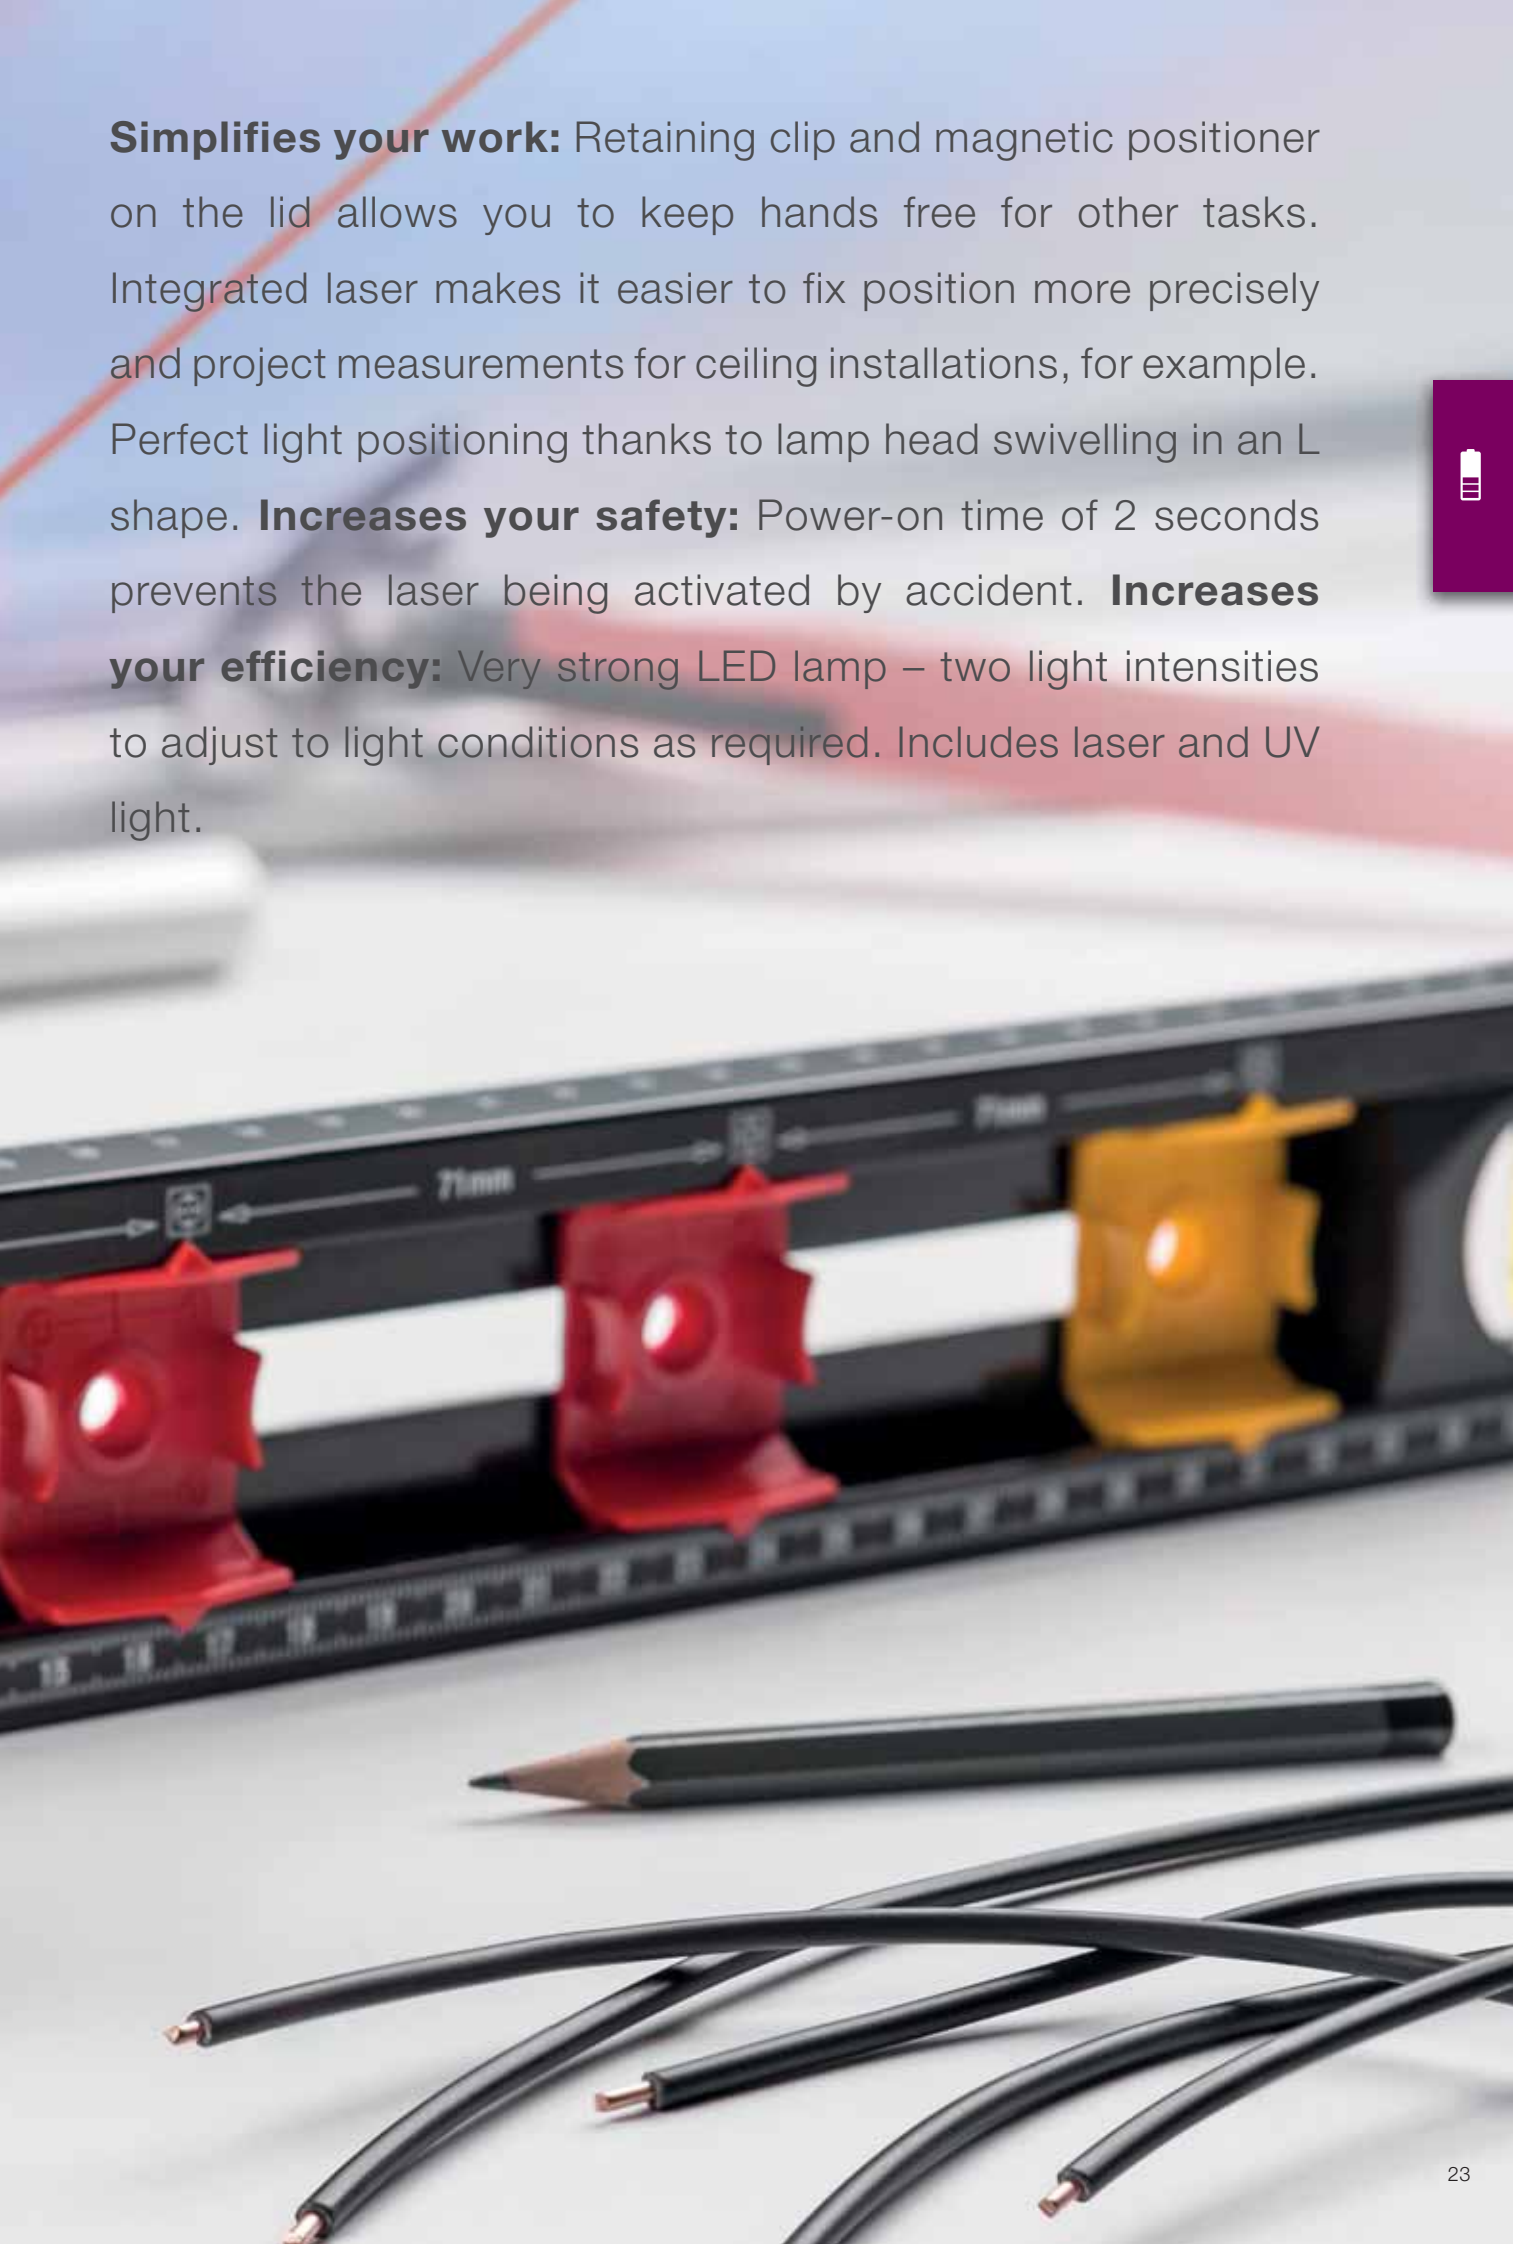

Flashlight with LED, laser and UV light

Universal work tool with integrated laser, UV light and LED light.

- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.



Torque QuickCheck

Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.

Torque QuickCheck torque testing device
Order-No. 42086
More information: Page 129

Product video:

Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand. **Increases your efficiency:** Fast, easy checking of your torque tool thanks to mobile, compact shape.

Simplifies your work: All tools securely arranged in a robust and ensure good, protected access to deep-set screws. **Increases** you space. **Offers you full protection:** Each tool individually

Screwdriver and bit set slimVario® screwdriver
Order-No. 41231
More information: Page 132

Product video:

clearly laid out bag. **Increases your safety:** Wiha slimBits **your efficiency:** Extensive interchangeable blade system saves tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver set SoftFinish® electric slimFix
Order-No. 41003
More information: Page 133

Further information:

Increases your safety: Wiha slim blades ensure unlimited, With the patented SoftFinish® handle design, ensuring work therapists at German Campaign for Healthier Backs. **Increases** balance of torque and control. **Offers you full protection:** 1,000 V AC.

protected access to deep-set screws. **Protects your health:** is kind to hands and muscles. Recommended by doctors and **your efficiency:** Unique Wiha handle-length concept for optimum Each tool individually tested at 10,000 V AC and approved for

Screwdriver set SoftFinish® electric slimFix

3201 K601

Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver set SoftFinish® electric slimFix
Slotted, Phillips, PlusMinus/Pozidriv 6-pcs.
Order-No. 38362
More information: Page 134

Product video:

The perfect complement:

Pliers set Professional electric
Order-No. 26852
More information: Page 252

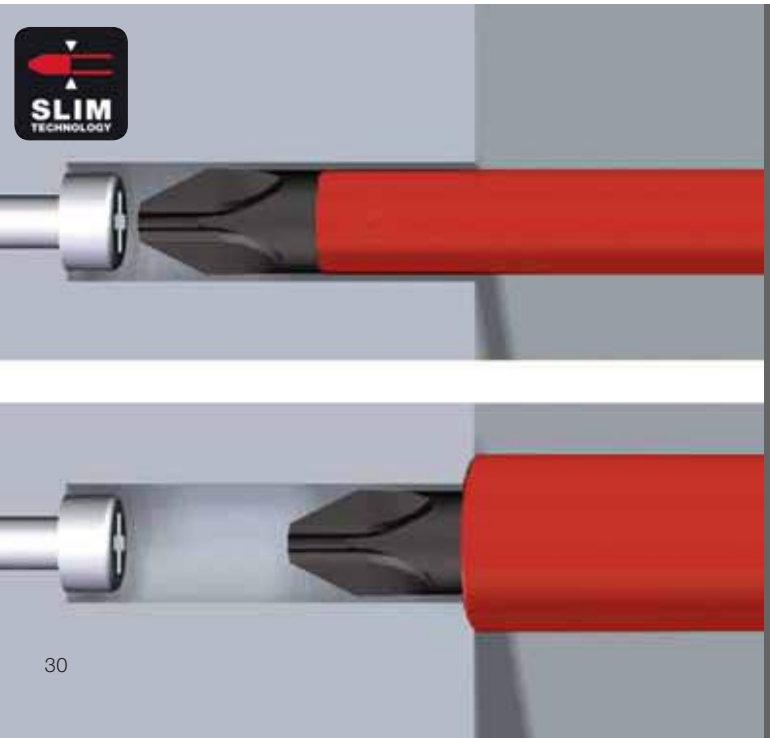

slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning - Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones (length) vary significantly over the four handle sizes in various forms.
- The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.

Combination profiles

PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.

Screwdriver with bit holder set SoftFinish® electric slimVario®
Order-No. 41230
More information: Page 136

Product video:

Simplifies your work: Compact handle – maximum power. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws. Protected work in constricted spaces. **Increases your efficiency:** Fully compatible with the Wiha slimBit system. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

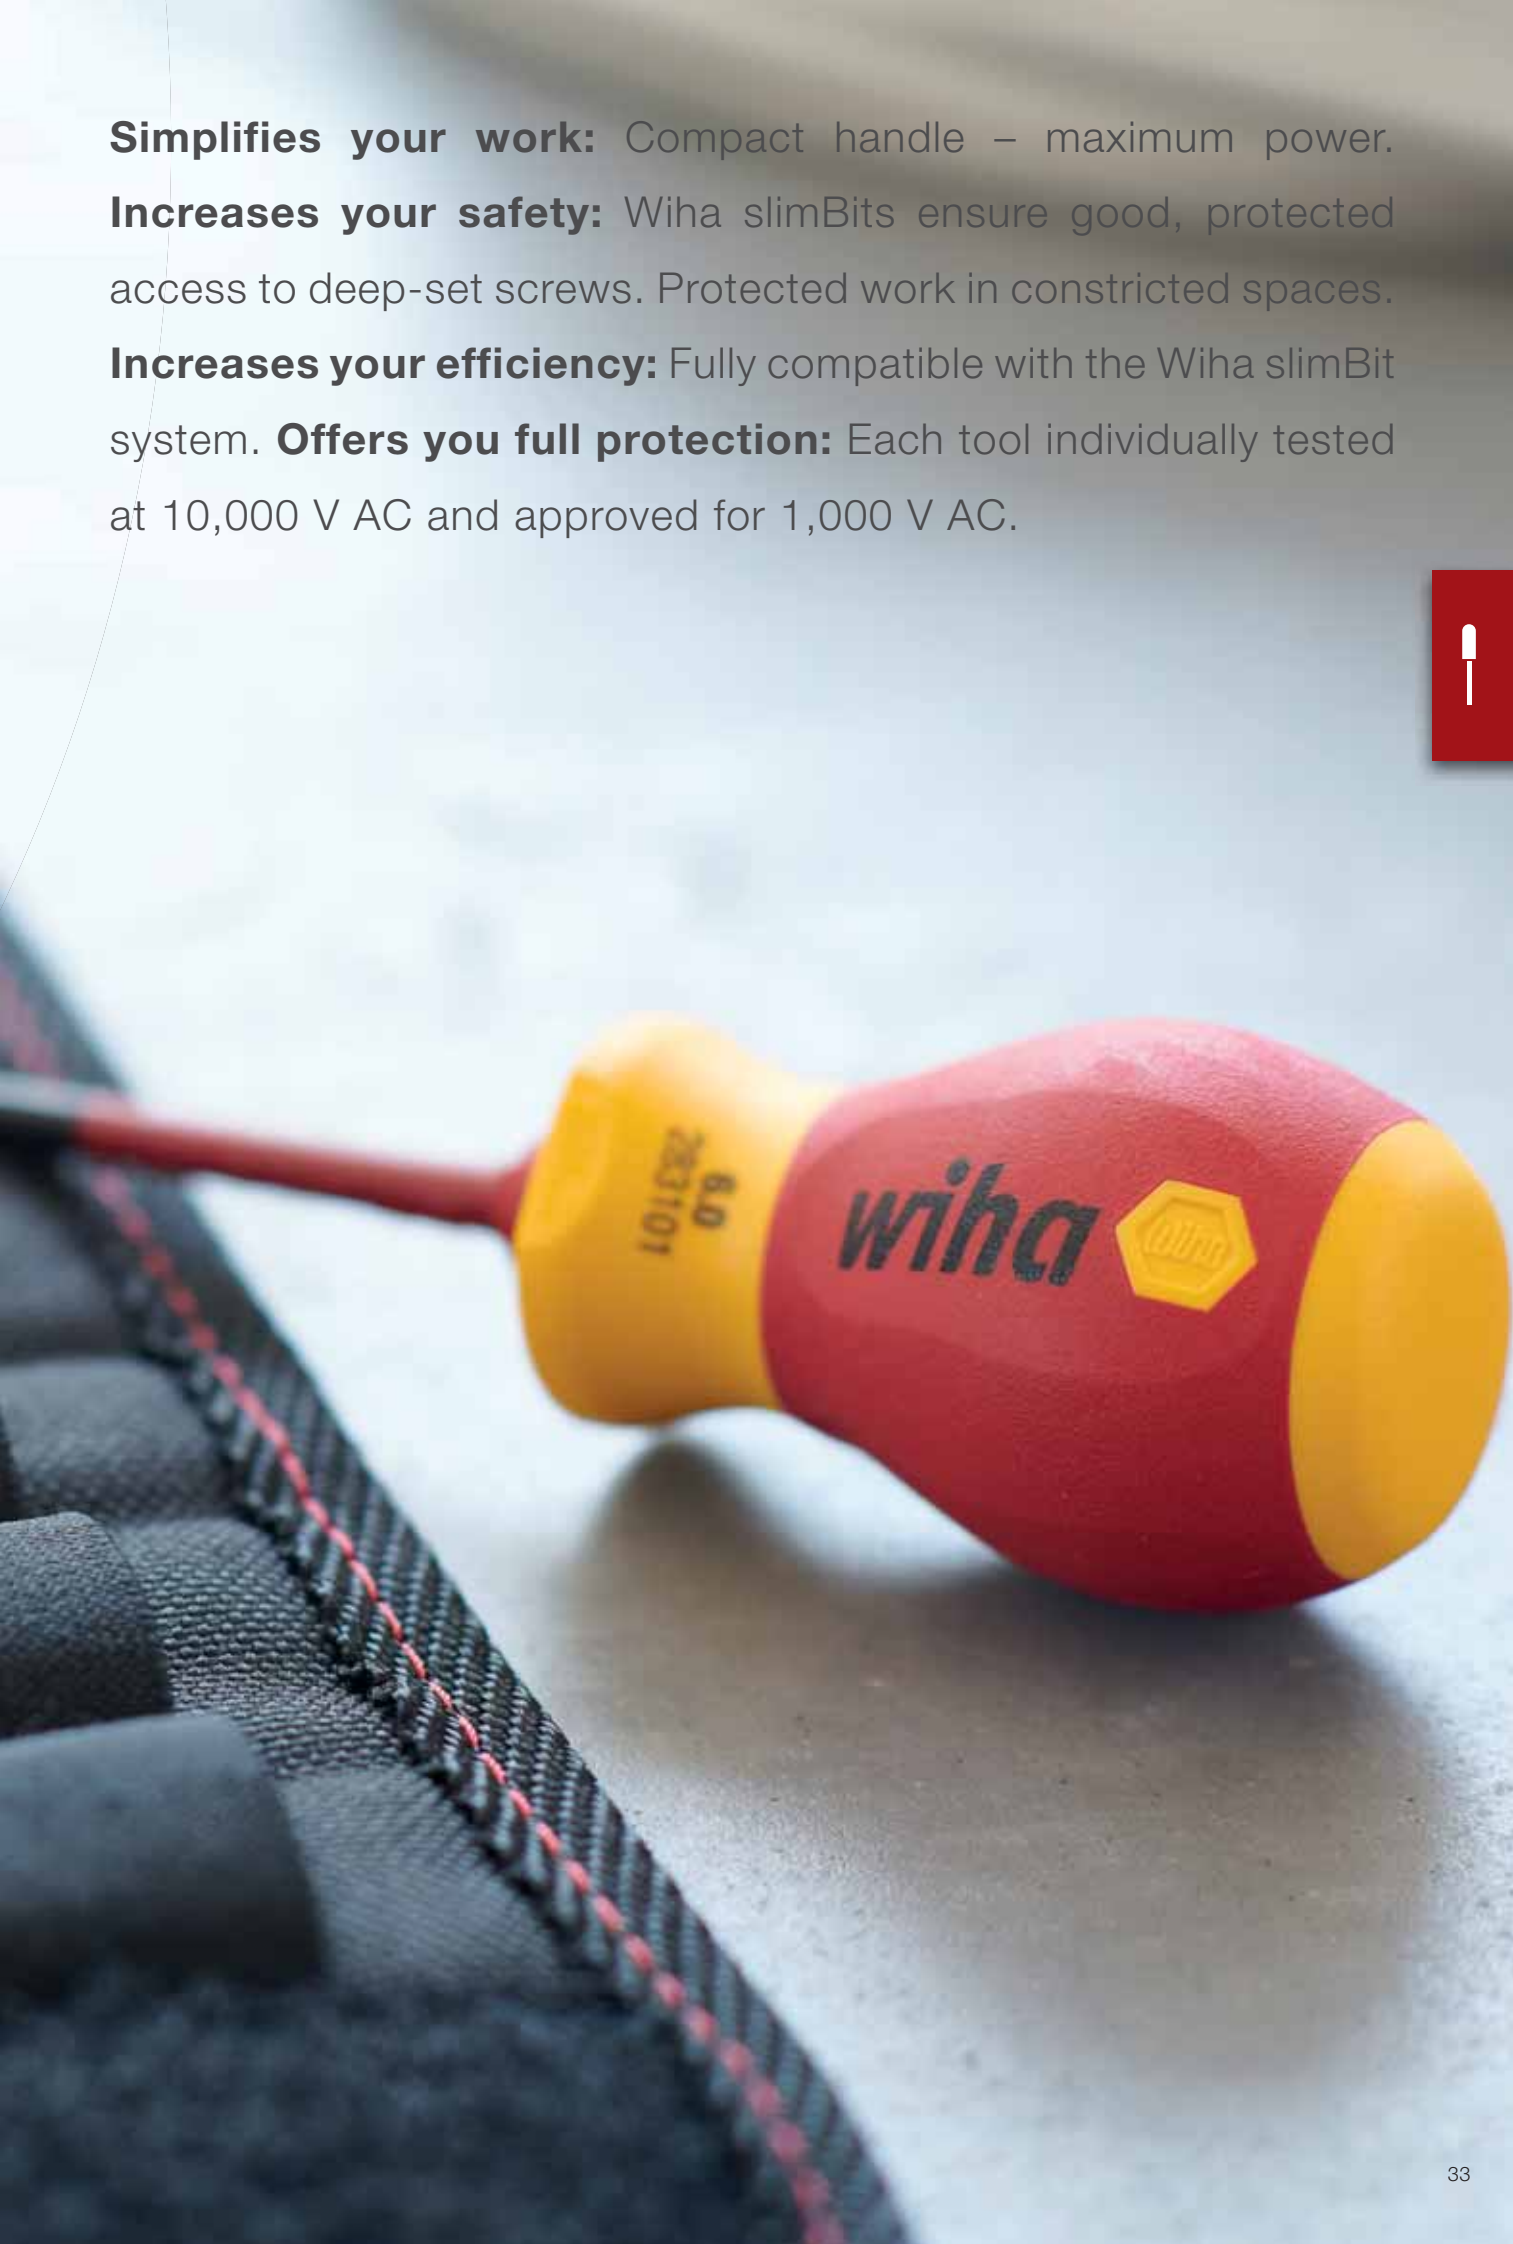



Screwdriver set SoftFinish®
Order-No. 41002
More information: Page 142

Product video:

Protects your health: With the patented SoftFinish® handle design, doctors and therapists at German Campaign for Healthier Backs. for optimum balance of torque and control.

ensuring work is kind to hands and muscles. Recommended by

Increases your efficiency: Unique Wiha handle-length concept

Screwdriver set SoftFinish®

302 HK6 SO

Simplifies your work: Standard drives and dimensions neatly stored away in a kit. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set SoftFinish®
Slotted, Phillips 6-pcs.
Order-No. 07152
More information: Page 142

Product video:

The perfect complement:

Magnetiser
Order-No. 01508
More information: Page 154

Wiha SoftFinish® screwdriver

The convenient expert for dry applications.

- The SoftFinish handle provides optimal grip for dry applications in trade and industry.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

530 HK6

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. **Makes handling easier:** Easy loosening of tight screws thanks to hex bolster for spanners. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set SoftFinish®
Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs.
Order-No. 21250
More information: Page 144

Product video:

The perfect complement:

Electrician's hammer
Order-No. 42071
More information: Page 301

Solid steel cap and hexagon head

- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

5533 HK5

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. **Increases your safety:** Anti-slip handle simplifies work in oily and wet application areas. **Makes handling easier:** Easy loosening of tight screws thanks to hex bolster for spanners. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set MicroFinish®
Slotted, Phillips with one-piece hexagonal blade and solid steel cap, 5-pcs.
Order-No. 29138
More information: Page 155

Product video:

The perfect complement:

Pliers set Professional
Order-No. 26854
More information: Page 267

Wiha MicroFinish screwdriver

The specialist for wet and oily applications.

- Due to the micro-fine surface structure of the screwdriver handle, the user can gain an optimal hold, even with oily or wet hands.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

302ESD HK5 01

Meets your requirements: Electrostatically conductive tools protect electronic components from damage. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Screwdriver handle size concept for an optimal balance between precision and control.

Screwdriver set SoftFinish® ESD Slotted, Phillips 5-pcs.
Order-No. 27252
More information: Page 157

Product video:

The perfect complement:

Pliers set Professional ESD
Order-No. 33507
More information: Page 282

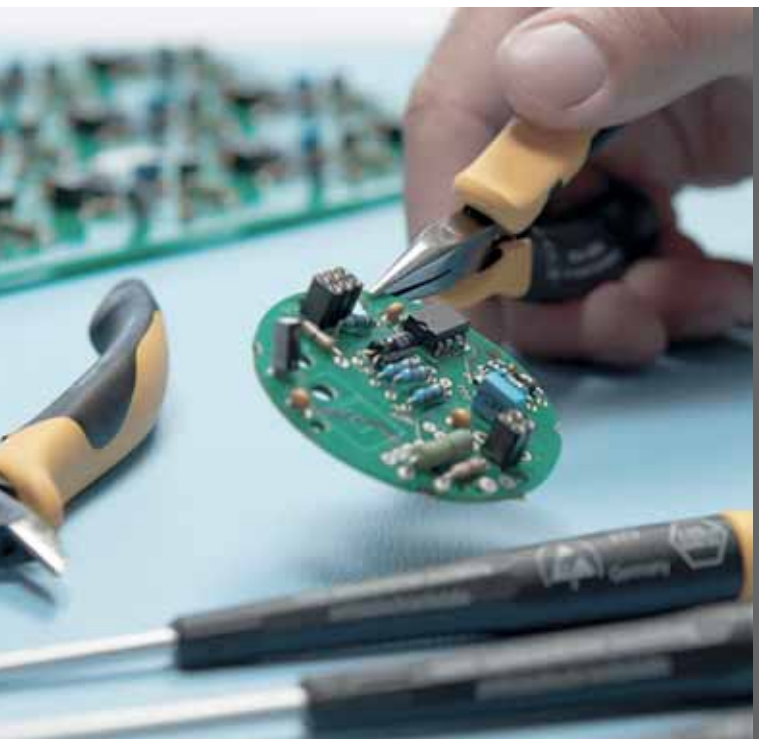

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Screwdriver set Precision ESD

272 K6

EPA

Simplifies your work: Sensitive working due to slim handle and rotating cap. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage.

Screwdriver set Precision ESD Slotted, Phillips 6-pcs.
Order-No. 08463
More information: Page 157

The perfect complement:

SMD tweezer set Professional ESD
Order-No. 32349
More information: Page 282

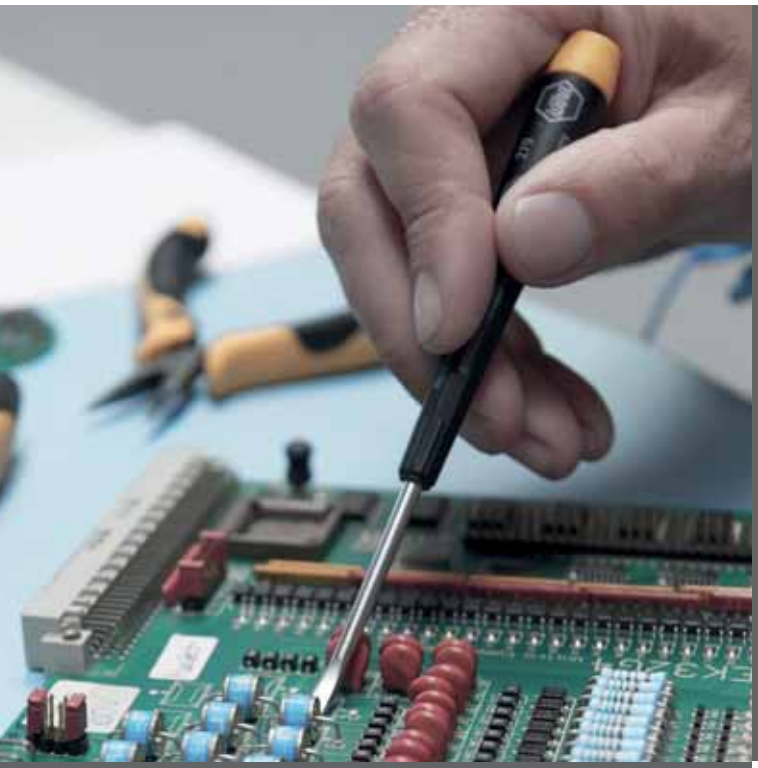

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

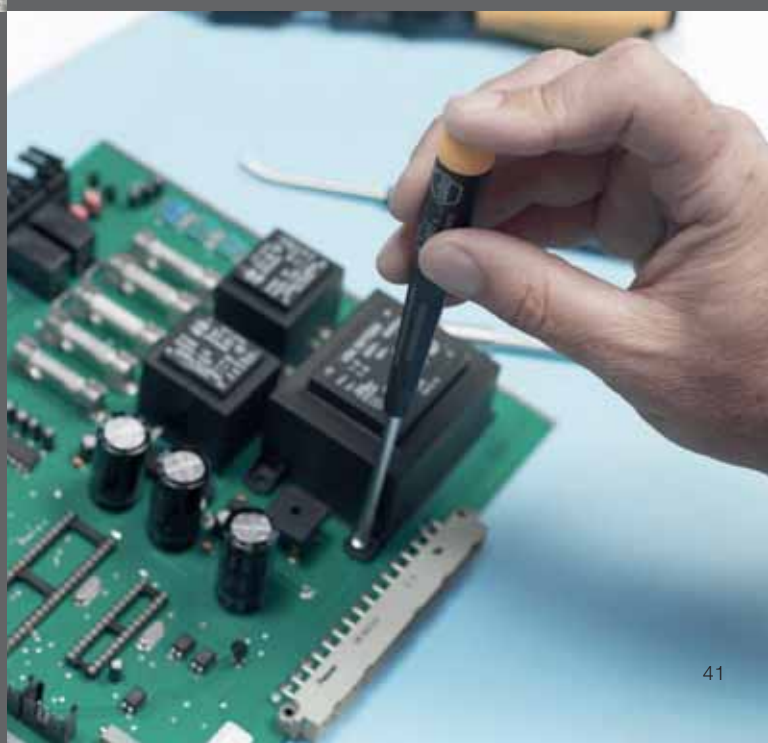



Torque screwdriver set ToqueVario®-S electric
Order-No. 36791
More information: Page 162

Product video:

Meets your requirements: A variably settable torque covers a arranged in a robust and clearly laid out bag. The correct torque slimBits ensure good, protected access to deep-set screws. design, ensuring work is kind to hands and muscles. Recommended Backs. **Increases your efficiency:** The correct torque protects **full protection:** Each tool individually tested at 10,000 V AC and

large application area. **Simplifies your work:** All tools securely protects you from warranty claims. **Increases your safety:** Wiha **Protects your health:** With the patented SoftFinish® handle by doctors and therapists at German Campaign for Healthier material from damages and means no follow-up work. **Offers you** approved for 1,000 V AC.

Torque screwdriver iTorque®
Order-No. 36888
More information: Page 168

More information:

Meets your requirements: A variably settable torque covers warranty claims. **Increases your efficiency:** The correct torque **Increases your productivity:** Utmost process safety thanks to

a large application area. The correct torque protects you from protects material from damages and means no follow-up work. integrated ClickControl counting function and calibration alarm.

iTorque

The intelligent torque tool.

- Required torque can be adjusted and set on the handle without the need for a separate tool.
- Large numerical display simplifies reading.
- ClickControl records every use and optimises the monitoring of measuring instruments.
- Calibration alarm after 5,000 applications for absolute process safety.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.
- Units can be switched (Nm » in.lb/ cNm » in.oz)
- Can be recalibrated

TorqueVario®-S

Variably settable torque tools.

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the torque setter adjusting tool.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.

- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.

2852 S10

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust and clearly laid out box. The correct torque protects you from warranty claims. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque protects material from damages and means no follow-up work.

Torque screwdriver set TorqueVario®-S assorted variably adjustable, 13-pcs. in box
Order-No. 26893
More information: Page 168

Product video:

The perfect complement:

Torque QuickCheck torque testing device
Order-No. 42086
More information: Page 129

Torque screwdriver with T-handle set TorqueVario®-S T

2893 S01

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust and clearly laid out bag. **Lowers your costs:** The correct torque protects you from warranty claims. **Makes handling easier:** Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Increases your efficiency:** The correct torque protects material from damages and means no follow-up work.

Torque screwdriver with T-handle set TorqueVario®-S T
assorted, variably adjustable torque limit, 11-pcs. in box
Order-No. 29234
More information: Page 172

The perfect complement:

XLSelector T bit set, 25 mm
Order-No. 41830
More information: Page 224

Torque screwdriver set TorqueVario®-S ESD

2882 S10

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust and clearly laid out bag. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque protects material from damages and means no follow-up work.

Torque screwdriver set TorqueVario®-S ESD
assorted, variably adjustable torque limit, 13-pcs. in box
Order-No. 27687
More information: Page 175

The perfect complement:

Tool set operator kit ESD
Order-No. 33504
More information: Page 123

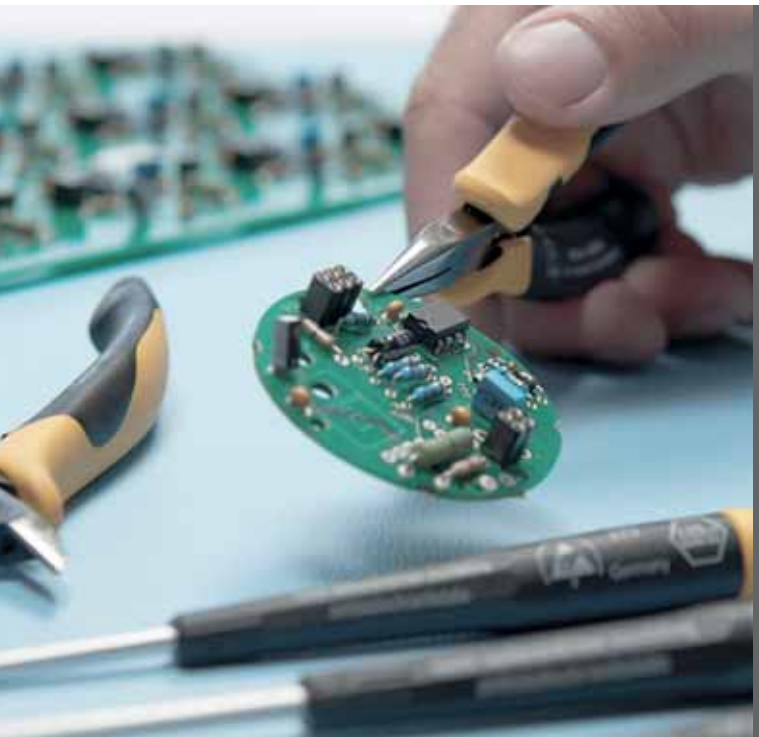

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Screwdriver with bit magazine LiftUp electric
Order-No. 41234
More information: Page 180

Product video:

Increases your safety: Wiha slimBits ensure good, protected injury, all blades stowed safely inside the handle. **Increases your** weight for 100 % efficiency. **Offers you full protection:** Each tool

access to deep-set screws. **Protects your health:** No risk of **efficiency:** Wiha LiftUp electric saves 75% volume and 50% less individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver with bit magazine LiftUp 26one®
Order-No. 40906
More information: Page 181

Product video:

Simplifies your work: Larger handle – maximum power. 26 tools bits in one tool. **Increases your efficiency:** 90% less volume,

in one. **Saves time:** Searching? Never again - the most common

85% less weight - 100% efficiency!

Screwdriver with bit magazine magnetic

3801 01

Saves space: Six tools in one. **Increases your efficiency:** Unrestricted access to confined spaces thanks to extremely short screwdriver handle.

Screwdriver with bit magazine magnetic Slotted, Phillips with 6 bits, Stubby, 1/4"
Order-No. 33736
More information: Page 182

Product video:

The perfect complement:

Screwdriver with bit holder set SoftFinish® electric slimVario®
Order-No. 41230
More information: Page 136

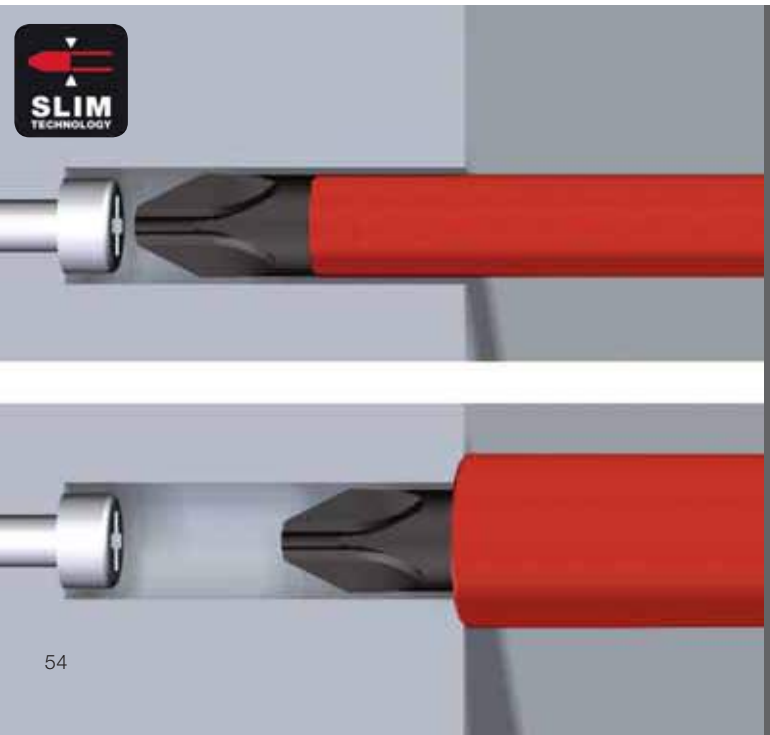

slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

351 PG9X

Simplifies your work: The variable handle position guarantees power fastenings as well as fast fastenings. **Saves time:** Thanks to its simple operation, the desired drive can be used quickly. **Increases your efficiency:** The most common drives cleverly organized in one tool.

Multitool PocketStar assorted 9-pcs.
Order-No. 25293
More information: Page 183

Product video:

L-key set in ErgoStar holder
Order-No. 37351
More information: Page 197

PocketStar

The Multitool that fits in your pocket

- Simple and easy selection of the desired key size at the touch of a button.
- Can be used as a screwdriver long handle and T-handle.
- 270° limit for safe work prevents trapped fingers.
- Covered ends on both pivot axes prevent clothing from being caught.

Nut driver insert gripper

SB 246 01

Saves space: The gripper is the ideal portable space- and weight-saving alternative to a nut driver set. **Increases your efficiency:** The multifunctional gripper adapts to fit every bolt or the outer profile of screws .

Nut driver insert gripper 3/8" in blister pack
Order-No. 20554
More information: Page 186

More information:

The perfect complement:

Pliers set Professional
Order-No. 26854
More information: Page 267

Screwdriver with interchangeable blade set SYSTEM 6

281 T11

Simplifies your work: Blade length is adjustable from 42-114 mm. **Makes handling easier:** Easy operation of the locking and unlocking button. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Compact fastening tool System 6 with comprehensive, interchangeable blade selection.

Screwdriver with interchangeable blade set SYSTEM 6
assorted 11-pcs.
Order-No. 03591
More information: Page 187

Product video:

The perfect complement:

Screwdriver with interchangeable blade set SYSTEM 6
Order-No. 27713
More information: Page 188

SYSTEM 6

Screwdriver with interchangeable blades

- Flexible, versatile interchangeable blade system in industrial quality.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Desired blade length can be set (42 – 114 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 4 ESD

2691 T11 ESD

Simplifies your work: Blade length is adjustable from 18-90 mm. Electrostatically conductive tools protect electronic components from damage. **Makes handling easier:** Easy operation of the locking and unlocking button. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Compact precision fastening tool System 4 with comprehensive, interchangeable blade selection.

Screwdriver with interchangeable blade set SYSTEM 4 ESD assorted 11-pcs.
Order-No. 31499
More information: Page 193

The perfect complement:

Pliers set Professional ESD
Order-No. 33507
More information: Page 282

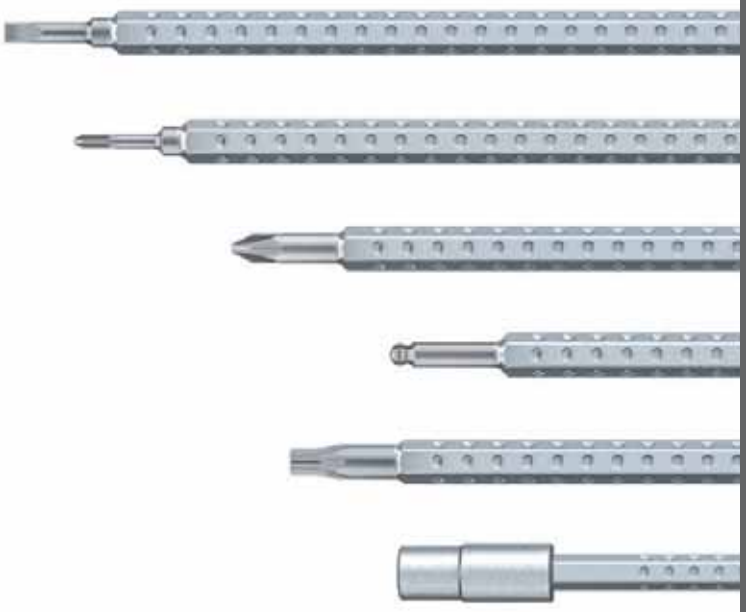

SYSTEM 4

Screwdriver with interchangeable blades

- Flexible, versatile precision interchangeable blade system for delicate fastening tasks.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Press and hold sleeve: Desired blade length can be set (18 – 90 mm)
- Release sleeve: Blade is held in place

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.



L-key set in ErgoStar holder
Order-No. 41980
More information: Page 196

Product video:

Simplifies your work: The ball end facilitates access to screws and forgetting and leaving keys inside a machine and causing damage. the ErgoStar holder. **Saves time:** Ensures order: removing and targeted Coloured L-keys quick and easy to find – also in dark environments can be quickly found thanks to colour coding. Wiha MagicRing®

allows you to work at an angle of up to 25°. Reduces the risk of **Makes handling easier:** Always the right key in the right place with insertion in the holder is child's play. **Increases your efficiency:** thanks to fluorescent paint visible in UV light. The required key width holding feature holds all hex screws in place without a magnet.

L-key set in ErgoStar holder

SB 369R H9

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Makes handling easier:** Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play. **Increases your efficiency:** Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

L-key set in ErgoStar holder MagicRing® hexagonal ball end, 9-pcs., matt chrome-plated in blister pack
Order-No. 37352
More information: Page 197

Product video:

The perfect complement:

Torque screwdriver set TorqueVario®-S
Order-No. 26893
More information: Page 168

L-key set in ProStar holder

SB 369T S9

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Makes handling easier:** Sliding function for one-handed opening of the holder and simple, quick removal. **Protects your health:** Reduction of the risk of injury by increasing the hand working space. **Increases your efficiency:** Improved accessibility thanks to its short side.

L-key set in ProStar holder
Matt chrome-plated hexagonal ball end with short shaft, 9-pcs. in blister pack
Order-No. 35481
More information: Page 198

Product video:

The perfect complement:

Screwdriver set SoftFinish®
Order-No. 41002
More information: Page 142

L-key with short shaft

Especially for hard-to-reach screws and confined spaces

- Improved accessibility thanks to a 60% reduction in length of the short L-key side.
- Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.
- Ball end geometry enables fastening at an angle of up to 25°.

L-key set in ErgoStar holder

SB 366R HZ13

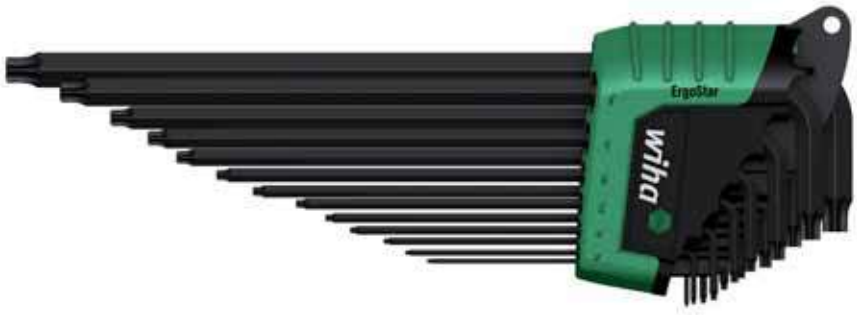

Makes handling easier: Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play. **Increases your efficiency:** Wiha MagicSpring® holding feature holds all Torx® screws in place without a magnet.

L-key set in ErgoStar holder TORX® MagicSpring®, 13-pcs. in blister pack, black oxidised
Order-No. 36504
More information: Page 202

Product video:

The perfect complement:

Pliers set Classic with MagicTips®
Order-No. 34708
More information: Page 267

ErgoStar

The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.
- Wall bracket for practical storage of the ErgoStar holder in the workshop.

L-key with T-handle set ComfortGrip

364DS K6

Simplifies your work: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Increases your efficiency:** Integrated side drive for effortless fastening and unfastening of rusted or stubborn screws.

L-key with T-handle set ComfortGrip
TORX® with side drive, matt chrome-plated 6-pcs.
Order-No. 26248
More information: Page 204

The perfect complement:

Pliers set Classic
Order-No. 26850
More information: Page 266

L-key with T-handle set ComfortGrip
Order-No. 26247
More information: Page 204

Product video:

Simplifies your work: Effortless and comfortable transmission of thanks to high-quality, chrome-plated L-key surface to prevent effortless fastening and unfastening of rusted or stubborn

high torques thanks to T-handle with ComfortGrip. Highly durable corrosion. **Increases your efficiency:** Integrated side drive for screws.

FlipSelector Y bit set, 25 mm
Order-No. 41827
More information: Page 227

XLSelector T bit set, 50 mm
Order-No. 41831
More information: Page 225

BitBuddy® TY bit set, 29 mm
Order-No. 42137
More information: Page 223

More information:

Lowers your costs Bit quick and easy to find thanks to yellow **time:** No long searches thanks to fluorescent bit, infrequent bit thanks to clear organisation and automatic opening at the push greater lifespan* thanks to optimised bit for Y-shaped screws

marking – even in dark environments by using an UV light. **Saves** replacement thanks to long lifespan. Simple and rapid bit removal of a button. **Increases your efficiency:** The specialist with 120x (*compared to Wiha standard bit)

XLSelector Y bit set, 50 mm

SB 7948-Y950

Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

XLSelector Y bit set, 50 mm Phillips, Pozidriv, TORX®, 13-pcs., 1/4"
Order-No. 41834
More information: Page 226

More information:

The perfect complement:

Bit holder CentroFix Super Slim mechanically lockable
Order-No. 39134
More information: Page 246

Wiha TY bit concept

Bits quickly and easily selected thanks to the screw head shape.

- The T bit is ideal for fastening T-shaped screws with an angle of 90°.
- The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.
- Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

FlipSelector T bit set, 25 mm

SB 7947-T906

Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

FlipSelector T bit set, 25 mm Phillips, Pozidriv, TORX®, 13-pcs., 1/4"
Order-No. 41824
More information: Page 225

More information:

The perfect complement:

Flashlight with LED, laser and UV light
Order-No. 41286
More information: Page 128

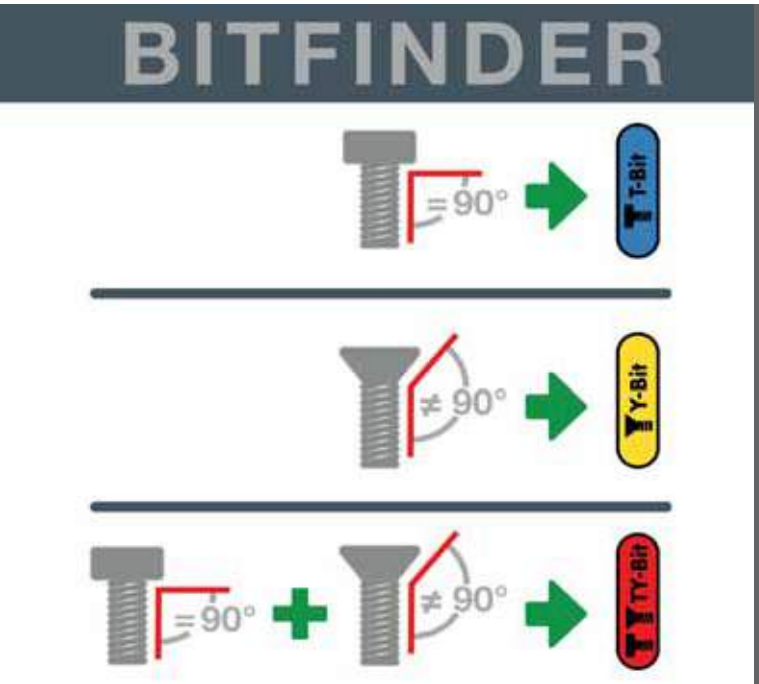

XLSelector T bit set, 50 mm

SB 7948-T950

Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws (*compared to Wiha standard bit)

XLSelector T bit set, 50 mm Phillips, TORX®, hex 13-pcs. 1/4"
Order-No. 41831
More information: Page 224

More information:

The perfect complement:

Screwdriver with LiftUp 25 magnetic bit magazine
Order-No. 38606
More information: Page 181

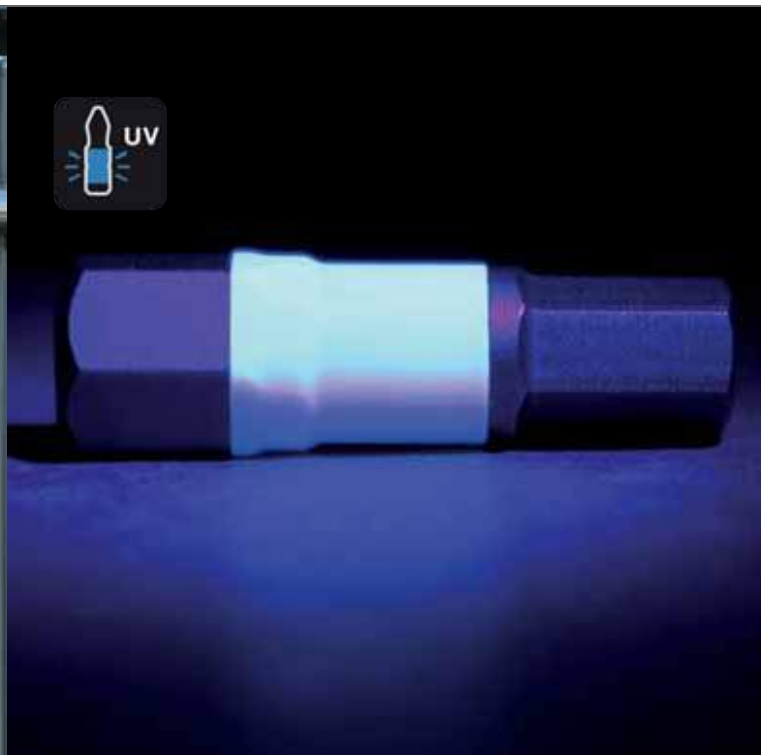

BitBuddy® TY bit set, 29 mm

SB 7945-TY903

Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. **Increases your efficiency:** The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)

BitBuddy® TY bit set, 29 mm
Phillips, Pozidriv, TORX®, 8-pcs., 1/4"
Order-No. 42137
More information: Page 223

More information:

The perfect complement:

Bit holder CentroFix Force mechanically lockable
Order-No. 39133
More information: Page 246

BitBuddy 29

Easy, single-hand operation.

Attaching:

- Bits are directly picked up with the machine from the BitBuddy.

Work:

- Gets your fastenings done.

Storing

- Bits are easily returned to the BitBuddy, by pressing on the red bit strip.
- With magnetic bit holder for a rapid bit change.
- BitBuddy is always at hand - easily fits into trouser pockets or onto the belt clip.

BitBuddy® TY bit set, 49 mm

SB 7946-TY505

Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. **Increases your efficiency:** The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)

BitBuddy® TY bit set, 49 mm TORX® 1/4" 7-pcs.
Order-No. 42115
More information: Page 222

More information :

The perfect complement:

L-key set in ErgoStar holder
Order-No. 41980
More information: Page 196

Bit holder MagicFlip Force magnetic
Order-No. 36800
More information: Page 246

Product video:

Simplifies your work: Actuating sleeve recoils to indicate flush fastening. **Increases your safety:** Thanks to the strong ring magnet, even heavy screws are held securely in place.

Bit holder CentroFix Force mechanically lockable

7148 CF

Saves time: Rapid bit change due to easy-to-operate locking and unlocking of the holder. **Increases your efficiency:** No wobbling and an extremely secure hold thanks to the play-free guidance of bits.

Bit holder CentroFix Force mechanically lockable
1/4", magnetic
Order-No. 39133
More information: Page 246

Product video:

Bit holder CentroFix Super Slim mechanically lockable

7148 CS

Saves time: Automatic bit locking mechanism upon insertion. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.

Bit holder CentroFix Super Slim mechanically lockable
1/4", magnetic
Order-No. 39134
More information: Page 246

Product video:

CentroFix Force

- CentroFix Force
- Suitable for all bits with 1/4" hex drive style C6.3 and E6.3.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

CentroFix SuperSlim

- Up to 30% reduced outer diameter compared to "conventional" quick release holders.
- Improved screw accessibility in confined holes.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

MagicFlip Force

- Facilitates the fastening of long wood screws.
- Optimal holding force thanks to extremely powerful Neodym ring magnet.
- FlipBack: The actuating sleeve automatically springs back during recessing.
- Magnet On/Off: The ring magnet can be "deactivated" by pushing the actuating sleeve back.

Installation pliers TriCut Professional electric
Order-No. 38552
More information: Page 253

Product video:

Simplifies your work: The angled head allows you to work in need one tool for three tasks: cutting to length, stripping and 60% volume and 50% less weight for 100% efficiency. **Offers you** approved for 1,000 V AC.

hard-to-reach places such as installation sockets. Now you only skinning. **Increases your efficiency:** Three tools in one. Saves **full protection:** Each tool individually tested at 10,000 V AC and

Pliers set Professional electric

Z 99 0 001 06

+20 % Power | Perfect Grip | VDE GS | 1000 V IEC 60900

Lowers your costs: Durable thanks to high-quality, chromed plier surface to prevent corrosion. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations. **Protects your health:** Special DynamicJoint® design reduces effort required for cutting. **Increases your efficiency:** Wiha needle nose pliers with extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Pliers set Professional electric Combination pliers, needle nose pliers, diagonal cutters 3-pcs.
Order-No. 26852
More information: Page 252

The perfect complement:



Screwdriver set SoftFinish® electric slimFix
Order-No. 41003
More information: Page 133

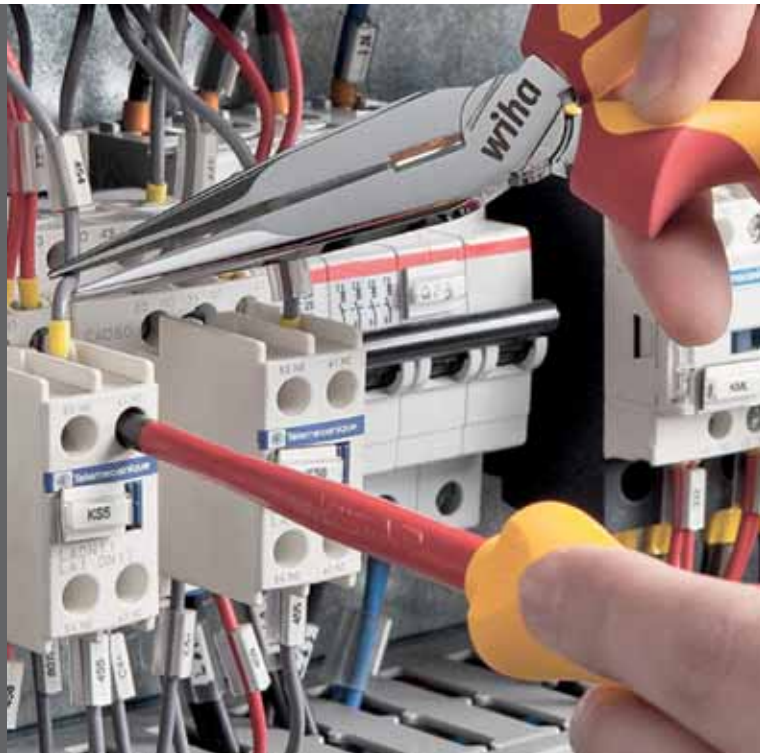

Z 18 0 06

Lowers your costs: Durable thanks to high-quality, chromed plier surface to prevent corrosion. **Protects your health:** Requires less force and reduces pressure on the wrists. **Increases your efficiency:** Two pliers in one - 200 % power at the touch of a button, available at any time. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®, switchable
Order-No. 38191
More information: Page 254

Product video:

The perfect complement:

Screwdriver and bit set slimVario® screwdriver
Order-No. 41231
More information: Page 132

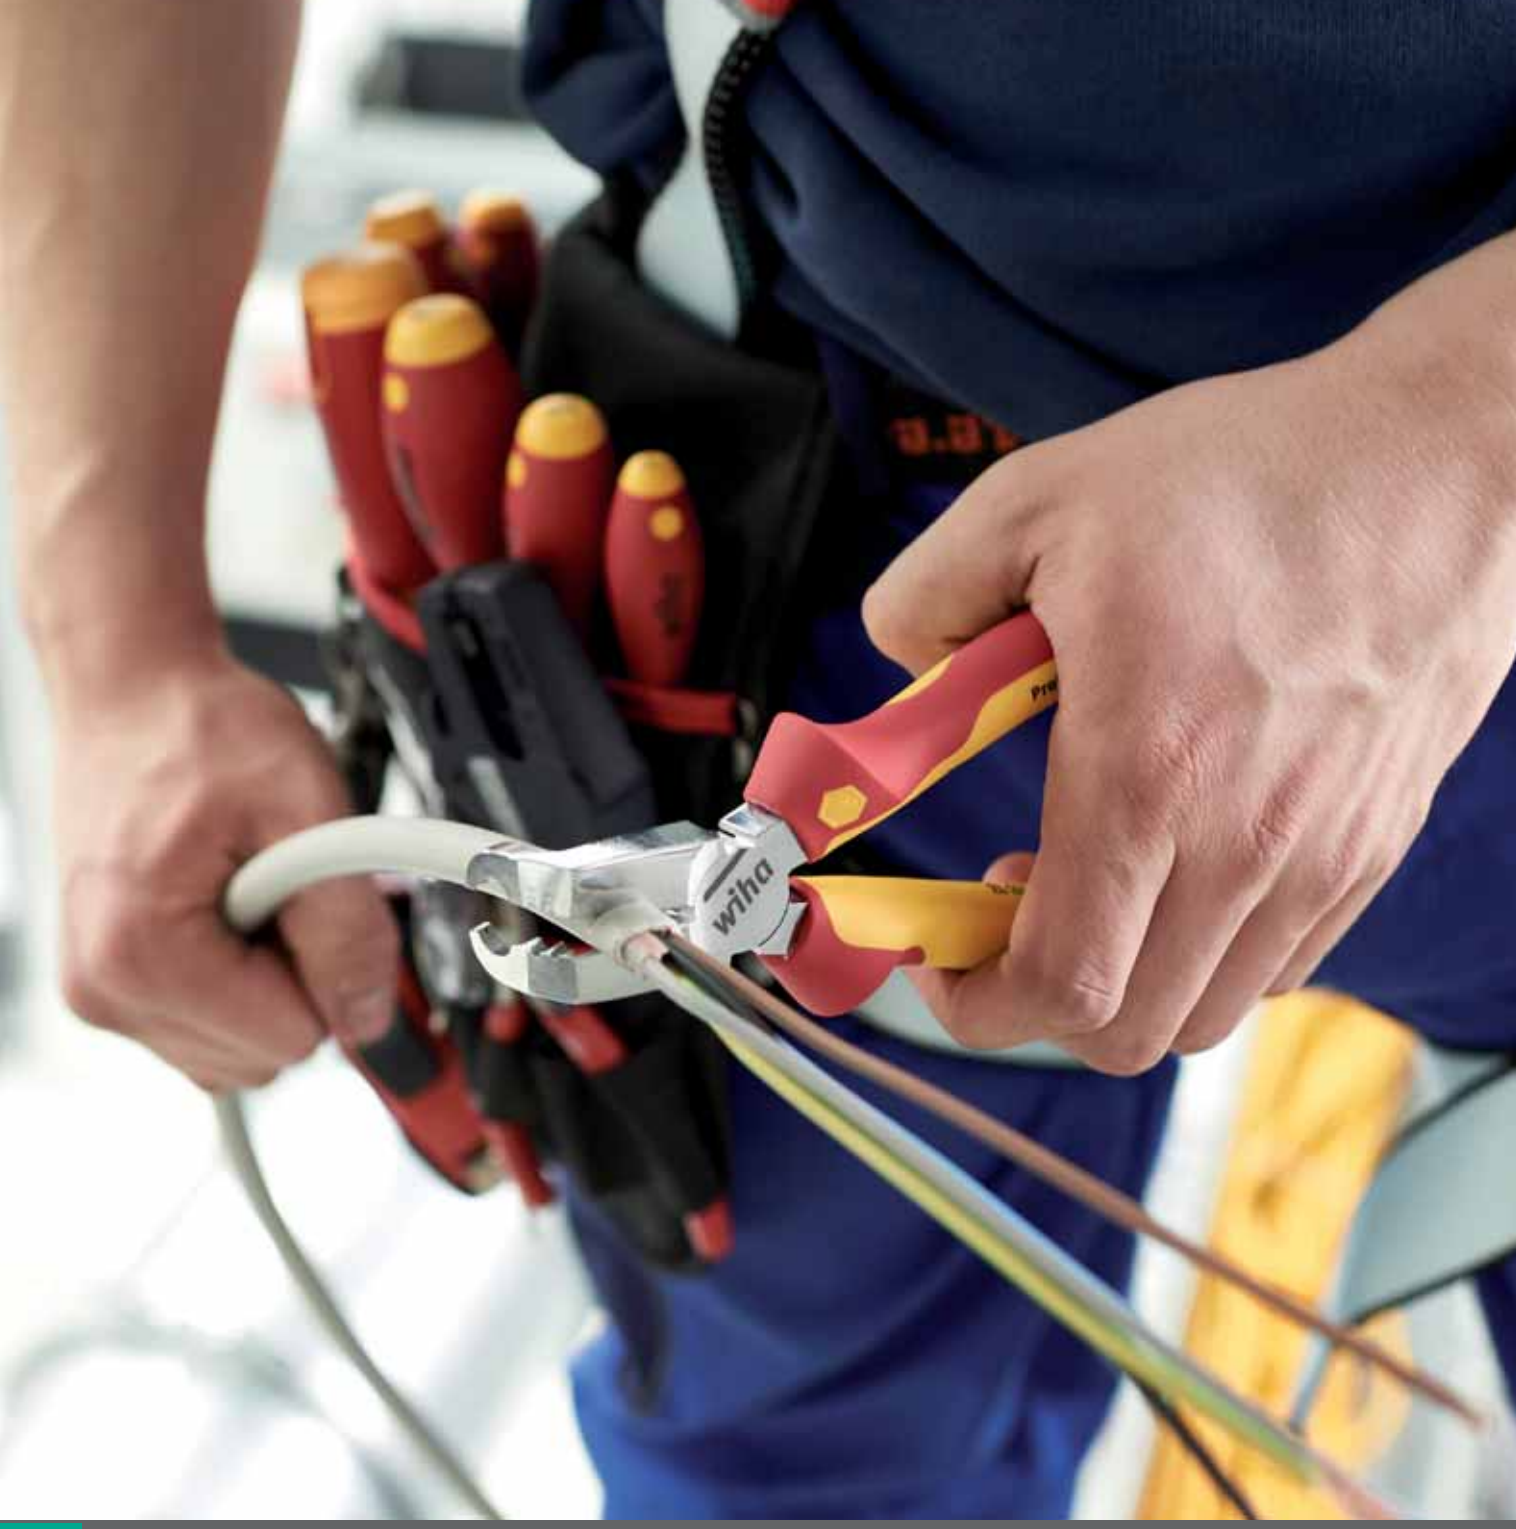

VDE-certified tools

Insulated tools are essential for all work on or around live components.

- Wiha VDE-tested tools are subject to stringent safety test procedures.
- All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.
- Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Needle nose pliers Inomic® VDE

Z 06 0 16

1000 V IEC 60900

Saves money: Two tools in one for cutting to length and skinning. **Protects your health:** Ergonomic handling enables users to work longer whilst protecting muscles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Needle nose pliers Inomic® VDE with cutting edge and stripping points
Order-No. 33259
More information: Page 257

The perfect complement:

Fine screwdriver set PicoFinish® electric
Order-No. 42989
More information: Page 136

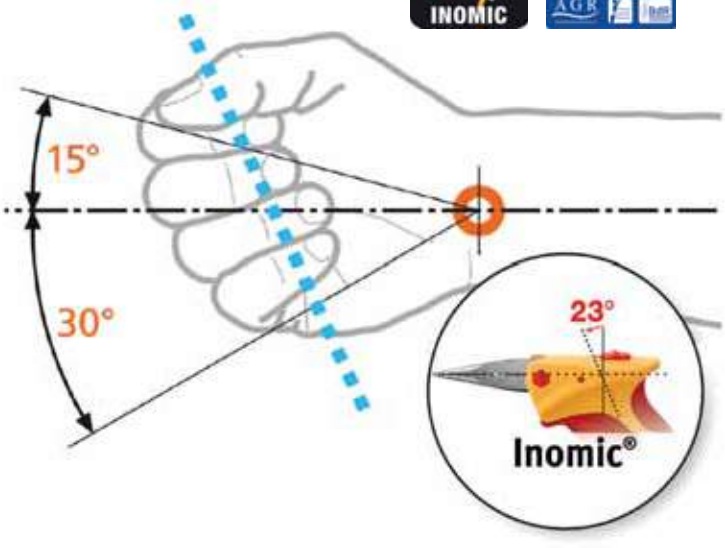

Wiha Inomic®

Innovative and ergonomic.

- The angled shape of the Inomic® pliers enables work which is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.
- Improved grip control due to highly sensitive opening spring.
- Like an extension of your own hand: gripping is simple, firm and safe.
- Pliers can be transported and stored in a closed position, thanks to a locking mechanism.

Automatic crimp tool
Order-No. 41246
More information: Page 265

Product video:

Lowers your costs: An integrated lever enables users to interrupt

your safety: Safe work through feed aid prevents crimping the

Thanks to hexagonal crimping, small wire-end sleeves no longer

of wire-end sleeve size with suitable crimping force for a large

the crimping process at any time to protect the pliers. **Increases** plastic cover of wire-end sleeves. **Makes handling easier:** get caught. **Increases your efficiency:** Automatic adjustment coverage area of 0.08-16mm^2.

Stripping tool automatic

Z 57 0 06 SB

Lowers your costs: Long-lasting and robust thanks to metal blade insert. **Protects your health:** Damper enclosed for large cable cross-sections to reduce recoil and protect wrists. **Saves time:** Blades quickly exchanged by immediately available replacement blades in the handle. **Increases your efficiency:** Automatic stripping pliers for a wide range of cables between 0.03 and 16 mm².

Stripping tool automatic up to 16 mm² in blister pack
Order-No. 42062
More information: Page 262

Product video:

The perfect complement:

Torque screwdriver set TorqueVario®-S electric
Order-No. 36791
More information: Page 162

Stripping tool, automatic up to 16mm²

- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.

Z 99 0 002 05

Lowers your costs: Durable thanks to high-quality, chromed plier surface to prevent corrosion. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations. **Makes handling easier:** Wiha QuickFix water pump pliers with simple and rapid opening width setting, especially during constantly changing applications. **Protects your health:** Special DynamicJoint® design reduces effort required for cutting.

Pliers set Professional
High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.
Order-No. 26854
More information: Page 267

The perfect complement:

Screwdriver set MicroFinish®
Order-No. 29138
More information: Page 155

Automatic crimp tool

- Process-safe hexagonal crimping prevents smaller wire-end sleeves from snagging.
- These crimping pliers can handle all standard applications with a crimping range between 0.08 and 16 mm².
- Suitable for both single wire-end sleeves and twin wire-end sleeves thanks to automatic crimping.

Pliers wrench Classic
Order-No. 40923
More information: Page 275

Product video:

Simplifies your work: Self-locking at AF 17 and above. Also **Lowers your costs:** Minimises wear and prevents damage to free handling. **Saves space:** Replaces a set of metric and imperial bending tasks take minimum effort thanks to manual force increased with no need to press any buttons. Ratchet function allows users Slender design thanks to button-free setting enables it to be used

suitable for left-handed users as operated without side push button. sensitive surfaces thanks to smooth, parallel jaws and backlash-open-ended spanners. **Protects your health:** Compaction and tenfold. **Saves time:** Safe, rapid setting directly on the work piece to fasten screws instantly with a simple glide. **Improved access:** in confined working environments, minimising the risk of damage.

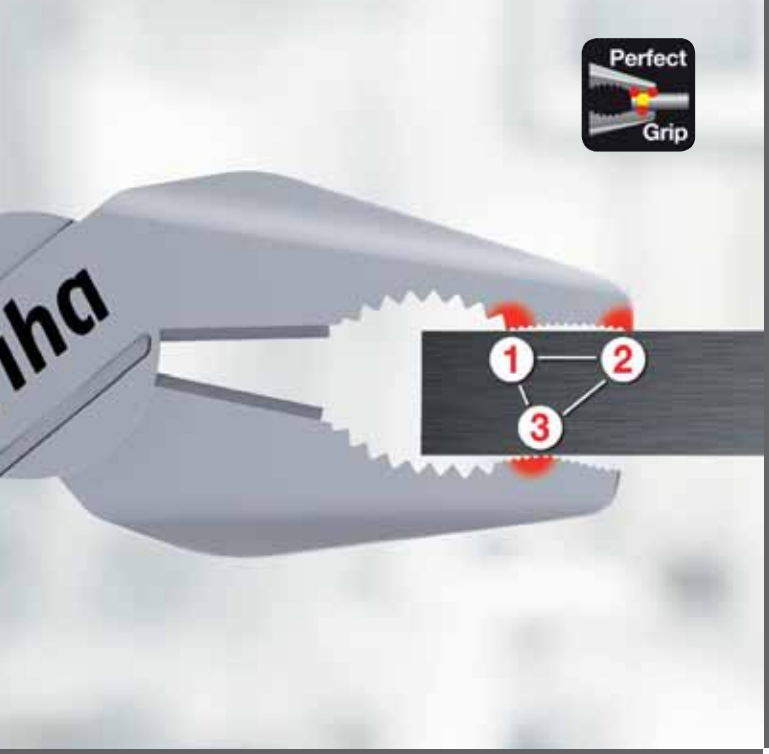

OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

MagicTips®

Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Z 99 0 007 01

Safety Hold

Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.

Pliers set Classic with MagicTips®
Circlip pliers 4-pcs.
Order-No. 34708
More information: Page 267

Product video:

The perfect complement:

Screwdriver with interchangeable blade set SYSTEM 6
Order-No. 00623
More information: Page 187

Z 18 0 05

Lowers your costs: Durable thanks to high-quality, chromed plier surface to prevent corrosion. **Protects your health:** Requires less force and reduces pressure on the wrists. **Increases your efficiency:** Two pliers in one - 200 % power at the touch of a button, available at any time.

Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable
Order-No. 38190
More information: Page 268

Product video:

The perfect complement:

Screwdriver set SoftFinish®
Order-No. 41002
More information: Page 142

Pliers set Professional ESD

Z 99 0 001 04

EPA

Meets your requirements: Universal set for various cutting applications, secure hold and feeding in the electronics sector. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage.

Pliers set Professional ESD
Diagonal cutters, oblique end cutting nippers, needle nose pliers 4-pcs.
Order-No. 33507
More information: Page 282

The perfect complement:

Screwdriver handle SoftFinish®-telescopic ESD
Order-No. 31498
More information: Page 189

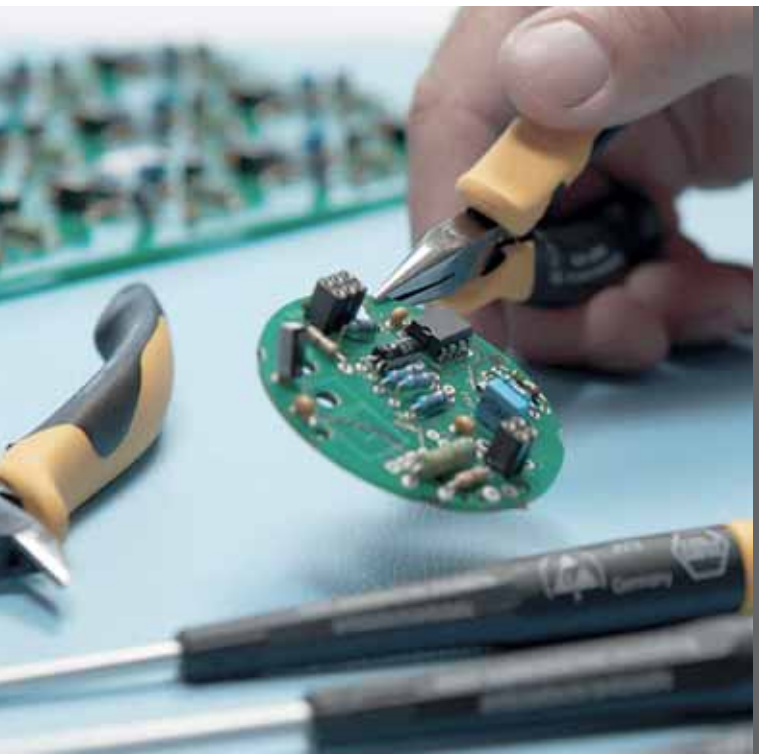

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Simplifies your work: Dirt- and dust-free work compared to when the handle prevents a discharge between the striking cap and the using a hammer at any time, even near power sockets. **Saves** how near you are to wall sockets. **Increases your efficiency:** measurement. Perfectly dimensioned dowel hole thanks to blade

SoftFinish® dowel racket set with dowels
Order-No. 41289
More information: Page 301

Product video:

machines are used. **Increases your safety:** Galvanic separation in blade. **Protects your health:** Dowel hole can be made anywhere **time:** Hammer dowel holes anywhere at any time without worrying Scaled impact screwdriver blade provides more detailed depth adjusted to required size.

Electrician's hammer
Order-No. 42071
More information: Page 301

Product video:

Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. **Increases your efficiency:** Perfect balance thanks to optimum weight distribution for effective handling. **Improved access:** Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. **Increases the quality of your work:** The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

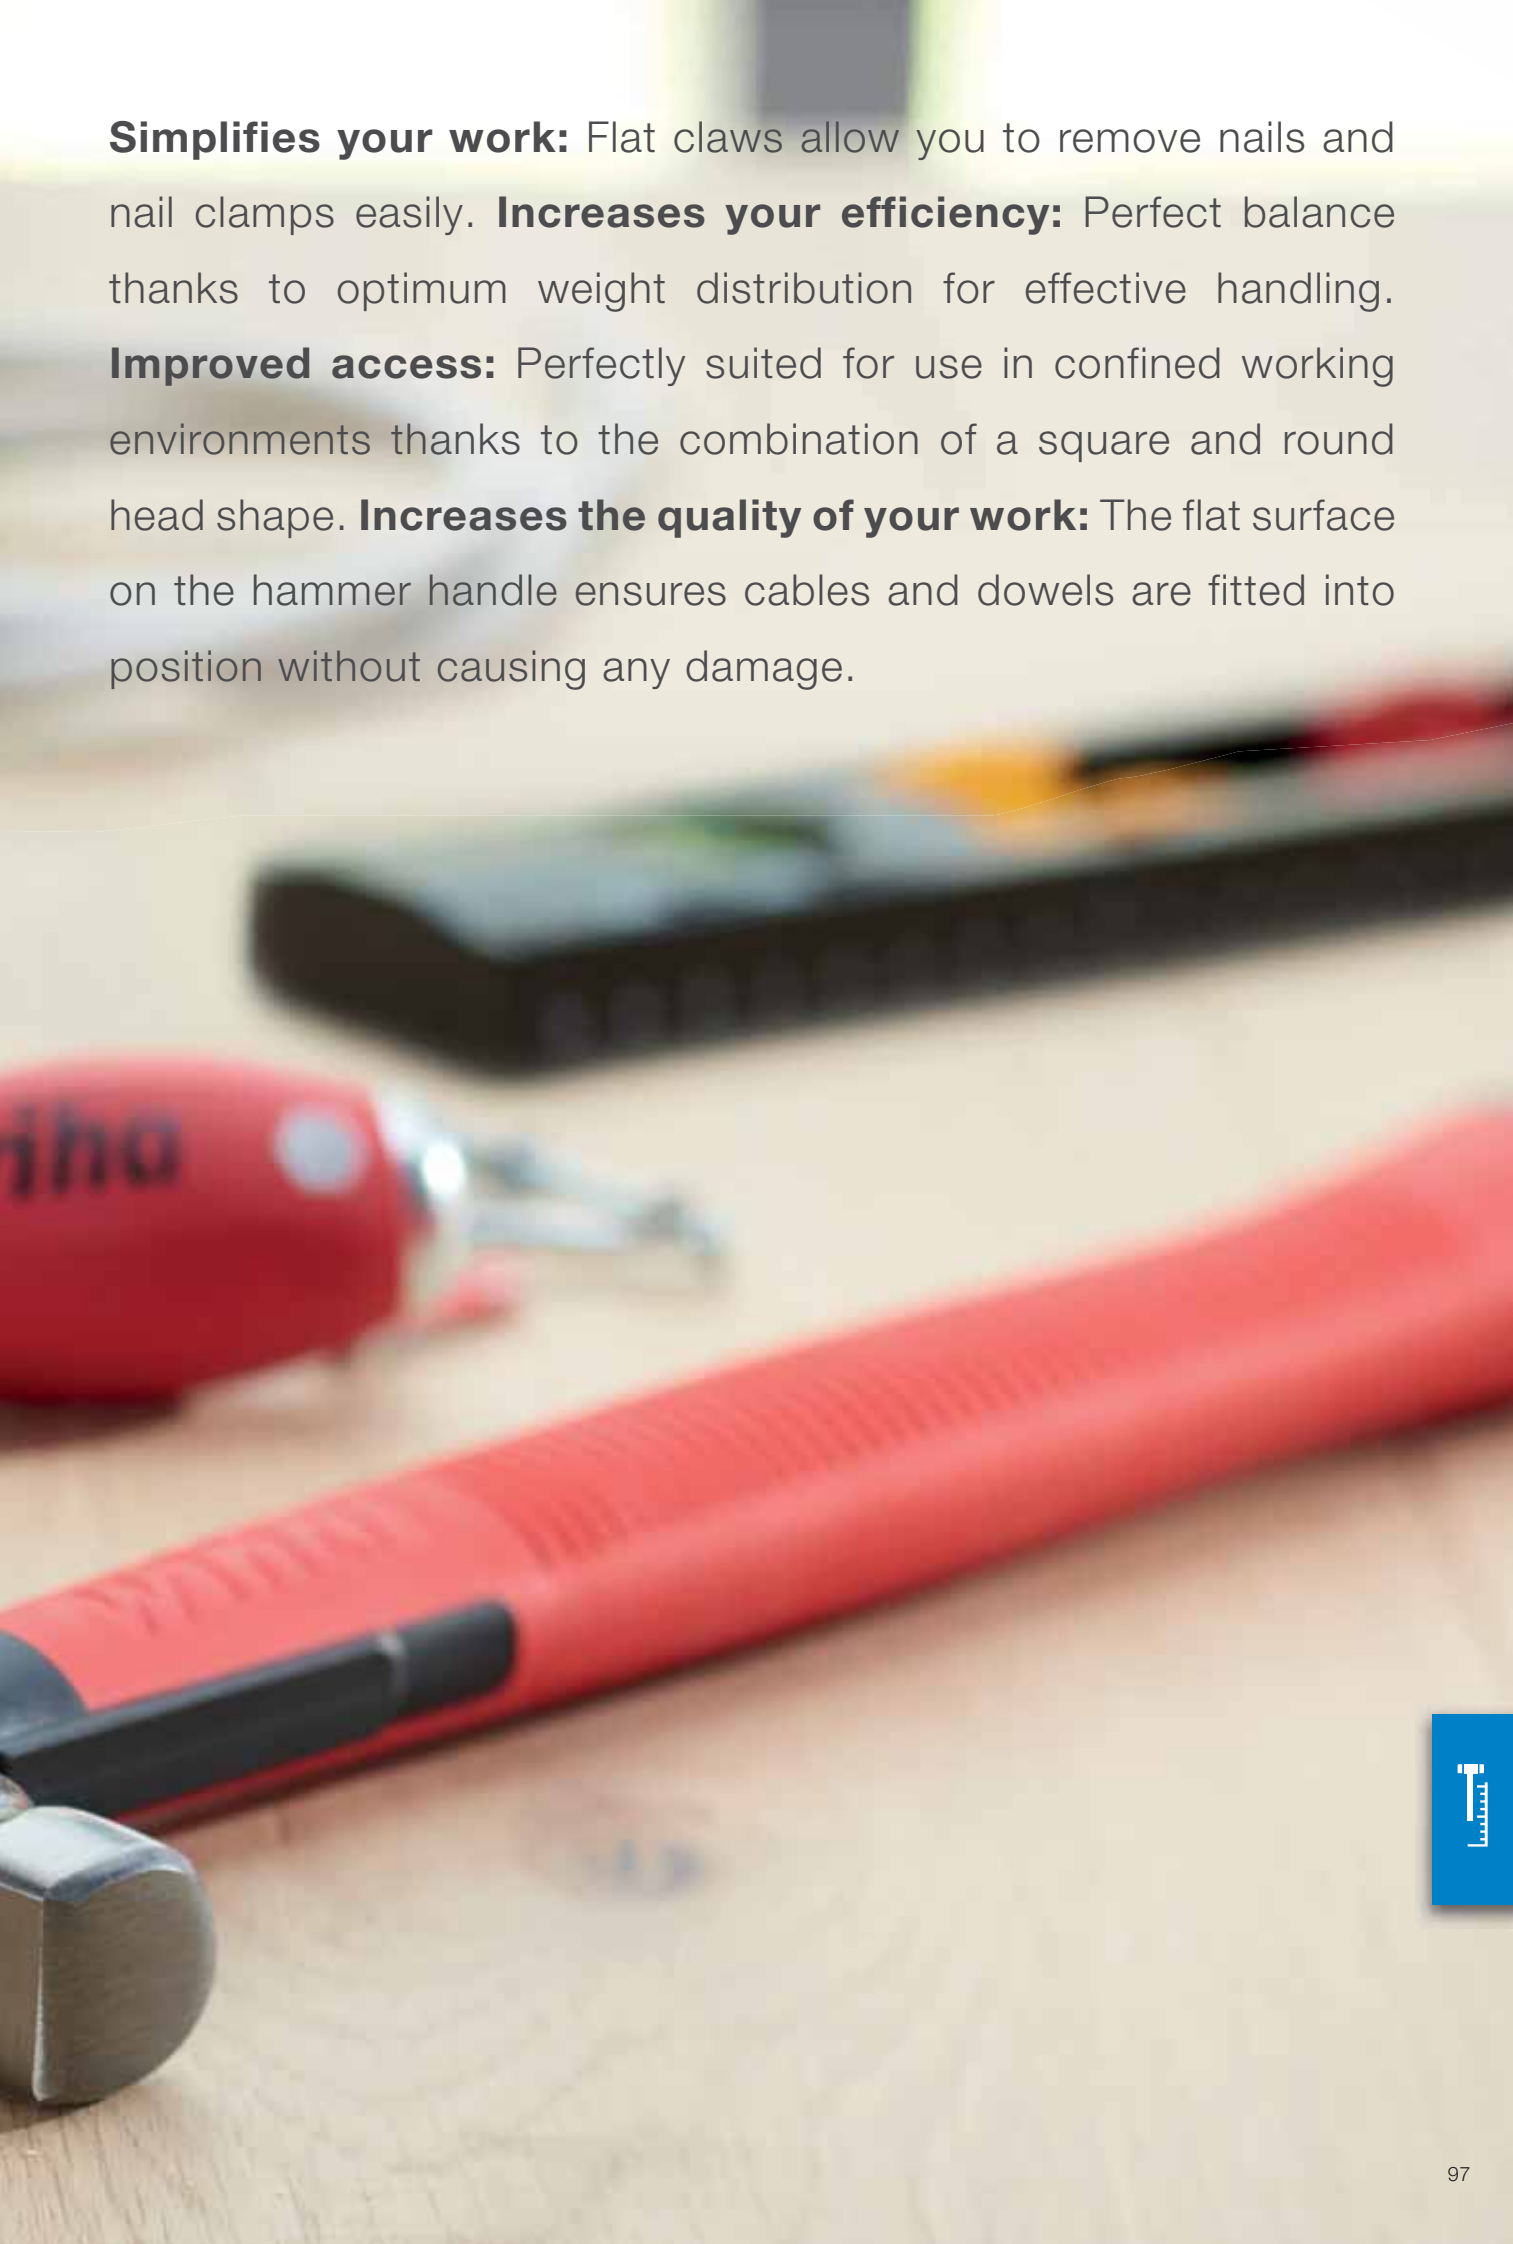

Soft-faced hammer set Safety

832 B8

Meets your requirements: Hammer components in a practical Wiha safety set with replaceable hammer heads of various degrees of hardness for all applications. **Simplifies your work:** Makes work easier, optimum impact effect and less effort needed. Each hammer component is available individually as a spare part. **Increases your efficiency:** Perfect finishing on rough edges thanks to the square hammer face with 27% more impact surface.

Soft-faced hammer set Safety with assorted hammer faces, 8-pcs. in box
Order-No. 28050
More information: Page 294

The perfect complement:

Electrician's spirit level
Order-No. 42074
More information: Page 302

Meets your requirements: Yellow hammer head / medium-hard: e.g. for tool and machine engineering, car repairs, sheet metal and assembly work. **Simplifies your work:** Makes work easier, optimum impact effect and less effort needed. **Protects your health:** Deadblow Hammering without recoil minimises loads on joints, tendons and muscles.

Soft-faced hammer dead-blow, medium hard
With steel tube handle, round hammer face

Order-No. 02122
More information: Page 299

The perfect complement:

L-key set in ErgoStar holder
Order-No. 41980
More information: Page 196

No-recoil soft-faced hammer

- The special metal filling in the hammer head prevents recoil.
- Approx. 25% more hammer head mass provides additional power.
- Preserves delicate surfaces and edges through high-impact effect.

Simplifies your work: Comfortable measurement in different when viewed from above. **Saves space:** Perfectly portable; fits 4 flush boxes. **Increases your efficiency:** Both bubbles can be

Electrician's spirit level
Order-No. 42074
More information: Page 302

Product video:

work positions thanks to the ingeniously positioned scales, even into Wiha cases. **Saves time:** Variable distance marks for up to seen easily even from an acute angle.

1000 V

SoftFinish® dowel racket set with dowels

- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

Electrician's hammer

- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-to-access spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

Electrician's spirit level, 40 cm

- Quick, easy marking of positions for up to four flush boxes in just one simple work step thanks to the integrated marking points.
- The continuous housing allows users to mark lines without interruption.
- An additional scale on the upper surface ensure precise measurement even when viewing from above.
- The bubbles are clearly visible, even from a sharp angle.
- The level is perfectly suitable for portable use thanks to its compact design.

Content

Competence XXL II electrician's tool set
Page 108

Tool set service technician
Page 112

Tool set electrician
Page 113

Tool set electrician
Page 116

E-screwdriver, set 2, speedE®
Page 126

Flashlight with LED, laser and UV light
Page 128

Torque QuickCheck torque testing device
Page 129

Screwdriver and bit set slimVario® screwdriver
Page 132

Screwdriver SoftFinish® electric slimFix
Page 138

Screwdriver SoftFinish®
Page 146

Fine screwdriver PicoFinish
Page 152

Torque screwdriver set TorqueVario®-S electric
Page 162

Torque screwdriver TorqueVario®-S electric
Page 163

Torque screwdriver with T-handle TorqueVario®-S T electric
Page 165

Torque screwdriver iTorque®
Page 168

Screwdriver with bit magazine LiftUp electric
Page 180

Screwdriver with bit magazine LiftUp 26one®
Page 181

Multitool PocketStar
Page 183

Nut driver insert gripper
Page 186

L-key set in ErgoStar holder
Page 196

L-key set in ProStar holder
Page 198

L-key set in ProStar holder
Page 198

L-key set in ErgoStar holder
Page 202

BitBuddy® TY bit set, 29 mm
Page 223

XLSelector T bit set, 50 mm
Page 224

TY bit set 29 mm
Page 224

T bit set, 25 mm
Page 225

Installation pliers TriCut Professional electric
Page 253

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 256

Stripping tool automatic
Page 262

Automatic crimp tool
Page 265

Soft-faced hammer Safety soft/medium hard
Page 295

Soft-faced hammer dead-blow, medium hard
Page 196

Electrician's hammer
Page 301

SoftFinish® dowel racket set with dowels
Page 301

Ratchet wrench set insulated 3/8”
Page 117

Tool set mechanic
Page 121

Tool set ESD
Page 123

Ranges
From page 106

Electro
From page 124

Screwdriver MicroFinish®
Page 155

Screwdriver SoftFinish® ESD
Page 158

Screwdrivers
From page 130

Torque screwdriver TorqueVario®-S
Page 168

Torque screwdriver with T-handle TorqueVario®-S T
Page 172

Torque screwdriver TorqueVario®-S ESD
Page 175

Torque tools
From page 160

Screwdriver with interchangeable blade set SYSTEM 6
Page 187

Screwdriver with interchangeable blade set SYSTEM 4
Page 191

Screwdriver with interchangeable blade set SYSTEM 4 ESD
Page 193

Multitools
From page 178

L-key set in ProStar holder
Page 203

L-key with T-handle ComfortGrip
Page 204

L-key with key handle
Page 206


L-keys
From page 194

Y bit set, 25 mm
Page 236

Bit Professional 1/4"
Page 236

Bit holder CentroFix Force mechanically lockable
Page 246

Bits
From page 220

Professional BiCut® high-performance diagonal cutters with DynamicJoint®
Page 268

Pliers wrench Classic
Page 275

Circlip pliers Classic with MagicTips®
Page 278

Pliers
From page 250

Electrician's spirit level
Page 302

Electrician's Longlife® folding ruler, 2 m
Page 303

Striking and measuring tools
From page 292

Information
From page 304

Ranges
Designed for those who work with it.

The experiences of the user are taken into account right from the product development stage at Wiha tools. This ensures high-quality tool sets are designed for mechanics, electricians and electronics technicians which have been specifically compiled for their particular requirements and applications. Neatly stored and clearly organised in robust, compact tool bags, tools are ready at hand, ensuring work is completed easily and efficiently.

Wiha tools prove to be very handy, essential companions stored in a Wiha tool case, where the limitations of conventional tool cases have been eliminated: thanks to its practical tool pockets and extra storage space for small parts, the Wiha tool case provides simple, strain-free transport of your tools, offering greater convenience to make your work easier in every respect.

Application Ranges

For applications in electrics

Competence XXL II electrician's tool set assorted in case 115-pcs.
Page 108

Tool set electrician Competence XL assorted 80-pcs. in case
Page 110

Tool set service technician assorted 29-pcs. in bag
Page 112

Tool set electrician assorted 31-pcs. in bag
Page 113

Tool set electrician assorted 12-pcs. in bag
Page 113

Tool set electrician screwdriver, diagonal cutters, 6-pcs. in bag
Page 114

Tool set electrician assorted slotted, Phillips, 10-pcs. in belt pouch
Page 116

Bit set for mounting, 19-pcs. in bag
Page 115

Ratchet wrench set insulated 1/2" 20-pcs. in case
Page 117

Ratchet wrench set insulated 3/8" 20-pcs. in case
Page 117

Single open-end spanner set, insulated 6-32 mm 20-pcs. in case
Page 118

For applications in mechanics

Tool set mechanic assorted 31-pcs. in bag
Page 121

Tool set mechanic screwdriver, combination pliers, 6-pcs. in bag
Page 122

For applications in electronics

Tool set operator kit ESD
Page 123

Tool set ESD Pliers, screwdriver, tweezers, 9-pcs. in bag
Page 123

Competence XXL II electrician's tool set

assorted in case 115-pcs. **9300-704**

Order-No.	
42069	1

Fastening / jamming

⊖ ✙ ✙ ✙	Torque screwdriver set TorqueVario®-S electric (36791) 0,8 - 5,0 Nm 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings / 1 x Adjusting tool for torque screwdriver with long handle / 1 x slimBit bit holder electric, locked mechanically For VDE torque screwdriver with long handle 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PZ1 PZ2 / 1 x SL/PZ1 / 1 x SL/PZ2 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
	Screwdriver with bit magazine LiftUp electric (41234) 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x PZ1 PZ2 / 1 x SL/PZ2
O	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, Tool tested at 10,000 V AC (41229)
✙	Bit slimBit electric Pozidriv, Tool tested at 10,000 V AC / PZ2 x 75 (34586)
⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391) / 6,5 x 150 (35392)
✙	Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)
✙	Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)
✙	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330)
✙	Screwdriver SoftFinish® electric slimFix TORX® Tamper Resistant (with hole), Tool tested at 10,000 V AC / T10H x 100 (41141) / T15H x 100 (41142) / T20H x 100 (41143) / T25H x 125 (41144)
O	Screwdriver SoftFinish® electric Hex nut driver, Tool tested at 10,000 V AC / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) / 13 x 125 (00864)
✙	Fine screwdriver PicoFinish electric Phillips, Tool tested at 10,000 V AC / PH0 x 60 (38880)
⊖	Fine screwdriver PicoFinish electric Slotted, Tool tested at 10,000 V AC / 2,5 x 60 (38876)
⊖ ✙ ○ △ O	Switch cabinet key pen shape in blister pack 5-8 x 9 (39076)
⊖	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 3,5 x 75 (03223) / 12,0 x 200 (03231)

Which drives are used for each individual product? Page 304

	XLSelector Y bit set, 25 mm (41832) 1 x PH1 / 1 x PH3 / 2 x PZ1 / 4 x PZ2 / 2 x PZ3 / 2 x T10 / 3 x T15 / 4 x PH2 / 3 x T20 / 3 x T25 / 3 x T30 / 2 x T40 / 1 x Bit holder magnetic extra strong magnet, 1/4"
	L-key set in ErgoStar holder (41979) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10
Trimming / cutting	
	Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, Tool tested at 10,000 V AC / 200mm, 8" (38191)
	Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)
	Cable cutter Professional electric, Tool tested at 10,000 V AC / 200mm, 8" (34744)
	Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189)
Supplying / holding	
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708)
	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, Tool tested at 10,000 V AC / 200mm, 8" (26729)
	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)
	Water pump pliers Professional electric with push button adjustment, Tool tested at 10,000 V AC / 250mm, 10" (37450)
Stripping/ insulating / crimping	
	Installation pliers TriCut Professional electric 170mm, 7" (38552)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)
	Stripping tool automatic up to 16 mm² in blister pack 200mm, 8" (42062)
	Automatic crimp tool for wire-end sleeves hex crimping 210mm, 0,08-16mm² (41246)
	Crimp tool for insulated cable eyes and contacts 220mm, 0,5-6mm² (33841)
	Shear for electricians with crimp function in blister pack 160mm, 50mm² (41923)
Surveying/marking/measuring/checking	
	Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC (37871)
	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 / 310 lm x 390 - 400 nm (41286)
	Electrician's spirit level 40 cm (42074)
	Electrician's Longlife® folding ruler, 2 m metric, 10 segments (42068)
	SoftFinish® dowel racket set with dowels (41289) 1 x PH2 / 2 x 30 / 2 x 40
Striking/ chiselling	
	Electrician's hammer with 300 g hammer head, in blister pack 23,9 x 283 (42071)

Tool set electrician Competence XL

assorted 80-pcs. in case **9300-702**

Order-No.	
40523	1

Fastening / jamming

○	Screwdriver SoftFinish® electric Hex nut driver, Tool tested at 10,000 V AC / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861)
⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) / 6,5 x 150 (35392)
⊕	Screwdriver SoftFinish® electric slimFix electric PlusMinus/Phillips, Tool tested at 10,000 V AC / SL/PH1 x 80 (35502) / SL/PH2 x 100 (35503)
⊛	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330)
⊕	Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)
⊛	Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)
⊖	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12,0 x 200 (03231)
⊖ ⊕ ○ △ ▢	Switch cabinet key cross shape (36114)
⊖ ⊕ ⊛	Screwdriver with bit magazine LiftUp electric (38611) 1 x 3,0 / 1 x 4,0 / 1 x 5,5 / 1 x PH1 / 1 x PH2 / 1 x SL/PZ2
✺	L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10
⊖ ⊕ ⊛ ✺	Bit set XLSelector Standard 25 mm (29417) 1 x 4,5 / 1 x 5,5 / 1 x 6,5 / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"

Trimming / cutting

	Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, Tool tested at 10,000 V AC / 200mm, 8" (38191)
	Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 180mm, 7" (26744)
	Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189)

Which drives are used for each individual product? Page 304

Supplying / holding	
	Water pump pliers Professional electric with push button adjustment, Tool tested at 10,000 V AC / 250mm, 10" (37450)
⊖	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, Tool tested at 10,000 V AC / 200mm, 8" (26729)
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708)
⊖	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)
Stripping/ insulating / crimping	
⧗	Installation pliers TriCut Professional electric 170mm, 7" (38552)
	Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)
■	Crimp tool for wire-end sleeves 220mm, 0,14-16mm² (33844)
Surveying/marking/measuring/checking	
	Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC (37871)
⊖	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Folding ruler Longlife 2 m metric, 10 segments (27057)
	Switch cabinet spirit level 20 cm (36859)

INFOBOX:

VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Tool set service technician

assorted 29-pcs. in bag **9300-030**

Order-No.	
37137	1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391)
- Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)
- Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)
- PicoFinish® fine screwdriver Slotted 1,5 x 40 (42384) / 2,0 x 40 (42388) / 2,5 x 50 (42391) / 3,0 x 50 (42394)
- PicoFinish® fine screwdriver Phillips PH00 x 40 (42402) / PH0 x 50 (42401)
- Switch cabinet key cross shape (36114)
- L-key set in Compact holder (01418)
  1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Trimming / cutting

- Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)
- Diagonal cutters Electronic wide, pointed head without bevelled edge 130mm, 5 ½" (26818)

Supplying / holding

- Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)
- Needle nose pliers Electronic narrow, short head straight form 150mm, 6" (26801)

Stripping/ insulating / crimping

- Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Surveying/marking/measuring/checking

- Voltage tester SoftFinish® single-pole, 110-250 volts (34745)

Which drives are used for each individual product? Page 304

Tool set electrician

assorted 31-pcs. in bag **9300-035**

Order-No.	
41241	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391)
⊕	Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)
⊖ ⊕ ✱ ✱	Screwdriver with bit magazine magnetic (32901) 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PH3 / 1 x PZ2 / 1 x T15 / 1 x T20 / 1 x T25
⊕ ✱ ✱	1 x PH2 / 1 x PZ1 / 1 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"

Trimming / cutting

	Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)

Supplying / holding

	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708)

Stripping/ insulating / crimping

	Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)

Surveying/marking/measuring/checking

⊖	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Folding ruler Longlife 2 m metric, 10 segments (27057)

Tool set electrician

assorted 12-pcs. in bag **9300-025**

Order-No.	
36389	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,5 x 125 (35501) / 5,5 x 125 (35391)
⊕	Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)

Trimming / cutting

	Cable cutter Professional electric, Tool tested at 10,000 V AC / 200mm, 8" (34744)

Supplying / holding

	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)
	Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 180mm, 7" (41274)

Stripping/ insulating / crimping

	Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Surveying/marking/measuring/checking

⊖	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Folding ruler Longlife 2 m metric, 10 segments (27057)

Tool set electrician

+20% Power

1000 V IEC 60900

screwdriver, diagonal cutters, 6-pcs. in bag

9300-018

Order-No.	
33969	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (00822) / 4,5 x 125 (00824) / 5,5 x 125 (00826)
⊕	Screwdriver SoftFinish® electric Phillips, Tool tested at 10,000 V AC / PH1 x 80 (00847) / PH2 x 100 (00848)

Trimming / cutting

	Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)

Tool set electrician

+40% Power

SLIM

1000 V IEC 60900

screwdriver, heavy-duty diagonal cutters, 7-pcs. in bag

9300-031

Order-No.	
38020	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
⊕	Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH2 x 100 (35394)
⊕	Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ2 x 100 (35396)
⊕	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ2 x 100 (36330)

Supplying / holding

	Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 160mm, 6,5" (40921)

Which drives are used for each individual product? Page 304

Tool set electrician

screwdriver, needle nose pliers, diagonal cutters, 5-pcs. in bag

Z 99 0 002 06

Order-No.	
26755	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (00822) / 5,5 x 125 (00826)
⊕	Screwdriver SoftFinish® electric Phillips, Tool tested at 10,000 V AC / PH2 x 100 (00848)

Trimming / cutting

	Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)

Supplying / holding

	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Bit set for mounting

19-pcs. in bag

79187 T04

Order-No.	
41223	1
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x PH0 / 1 x PH1 / 1 x PH2
	1 x SL/PZ1 / 1 x SL/PZ2
	1 x 3,5 / 1 x 4,0 / 1 x 5,5
	1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder magnetic, 74 mm 1/4"
	1 x Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
	1 x Bit holder SYSTEM 6 clamping with ball

INFOBOX:
DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

Tool set electrician

assorted slotted, Phillips, 10-pcs. in belt pouch **9300-012-01**

Order-No.	
40948	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
⊕	Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)

Stripping/ insulating / crimping

	Stripping pliers Professional electric 160mm, 6 ½" (26847)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Supplying / holding

	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Surveying/marking/measuring/checking

⊖	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Measuring tape 5 m (33251)

Tool set electrician

assorted slotted, Pozidriv, 10-pcs. in belt pouch **9300-013-02**

Order-No.	
40282	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
⊕	Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)

Stripping/ insulating / crimping

	Stripping pliers Professional electric 160mm, 6 ½" (26847)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Supplying / holding

	Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Surveying/marking/measuring/checking

⊖	Voltage tester SoftFinish® single-pole, 110-250 volts (34745)
	Measuring tape 5 m (33251)

INFOBOX:
slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Which drives are used for each individual product? Page 304

Ratchet wrench set insulated 1/2”

1000 V IEC 60900

20-pcs. in case **7208N K2001**

	Order-No.	
	43024	1
	T-handle insulated for nut driver (43063)	
	Ratchet wrench insulated for nut drivers Switchable 1/2" x 250 mm (43053)	
○	Insulated extension 1/2" square adapter for nut driver inserts, insulated 1/2" x 250 mm (43056) / 1/2" x 125 mm (43055)	
○	Insulated nut driver insert 1/2" hexagon head 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 / 24 / 27 / 32	
◉	Insulated nut driver insert 1/2" internal hexagon 4 x 120 mm / 5 x 120 mm / 6 x 120 mm / 8 x 120 mm / 10 x 120 mm	

Manufactured according to EN/IEC 60900.

Ratchet wrench set insulated 3/8”

1000 V IEC 60900

20-pcs. in case **7207N K2001**

	Order-No.	
	43023	1
	T-handle insulated for nut driver (43062)	
	Ratchet wrench insulated for nut drivers Switchable 3/8" x 200 mm (43052)	
○	Insulated extension 3/8" square adapter for nut driver inserts, insulated 3/8" x 125 mm (43057) / 3/8" x 250 mm (43058)	
○	Insulated nut driver insert 3/8" internal hexagon 8 / 10 / 11 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 / 22	
◉	Insulated nut driver insert 3/8" internal hexagon 4 x 75 / 5 x 75 mm / 6 x 75 mm / 8 x 75 mm	

Manufactured according to EN/IEC 60900.

Single open-end spanner set, insulated 6-32 mm

1000 V IEC 60900

20-pcs. in case **5590N T20**

Order-No.		
43022		1
○	Single, insulated open-end spanner 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32	
○	Adjustable spanner electric Adjustable between 0-30 mm 0 - 30 x 250 mm (43061)	

Manufactured according to EN/IEC 60900.

Single, insulated open-end spanner

1000 V IEC 60900

○ **5590N**

Order-No.	○	
43026	6	1
43027	7	1
43028	8	1
43029	9	1
43030	10	1
43031	11	1
43032	12	1
43033	13	1
43034	14	1
43035	15	1
43036	16	1
43037	17	1
43038	18	1
43039	19	1
43040	22	1
43041	24	1
43042	27	1
43043	30	1
43044	32	1

Manufactured according to EN/IEC 60900.

Adjustable spanner electric

1000 V IEC 60900

○ **Adjustable between 0-30 mm** **246199**

Order-No.	○	mm	
43061	0 - 30	250	1

Manufactured according to EN/IEC 60900.

Which drives are used for each individual product? Page 304

T-handle insulated for nut driver

1000 V IEC 60900

24618

Order-No.	■↕	↔ mm	
43062	3/8"	200	10
43063	1/2"	200	10

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

○ 1/2" hexagon head

7208N

Order-No.	○	
43077	10	1
43078	11	1
43079	12	1
43080	13	1
43081	14	1
43082	17	1
43083	19	1
43084	22	1
43085	24	1
43086	27	1
43087	32	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

○ 3/8" internal hexagon

7207N

Order-No.	○	
43065	8	1
43066	10	1
43067	11	1
43068	12	1
43069	13	1
43070	14	1
43071	16	1
43072	17	1
43073	18	1
43074	19	1
43075	21	1
43076	22	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

○ 1/4" hexagon head

246

Order-No.	○	
43088	4	1
43089	5	1
43090	5,5	1
43091	6	1
43092	7	1
43093	8	1
43094	9	1
43095	10	1
43096	11	1
43097	12	1
43098	13	1
43099	14	1

Manufactured according to EN/IEC 60900.

Insulated extension

1000 V IEC 60900

1/2" square adapter for nut driver inserts, insulated

7208N

Order-No.	■↕	mm	
43055	1/2"	125	1
43056	1/2"	250	1

Manufactured according to EN/IEC 60900.

3/8" square adapter for nut driver inserts, insulated

7207N

Order-No.	■↕	mm	
43057	3/8"	125	1
43058	3/8"	250	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

1/2" internal hexagon

7208N

Order-No.	◉	mm	
43100	4	120	1
43101	5	120	1
43102	6	120	1
43103	8	120	1
43104	10	120	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

3/8" internal hexagon

7207N

Order-No.	◉	mm	
43105	4	75	1
43106	5	75	1
43107	6	75	1
43108	8	75	1

Manufactured according to EN/IEC 60900.

Ratchet wrench insulated for nut drivers

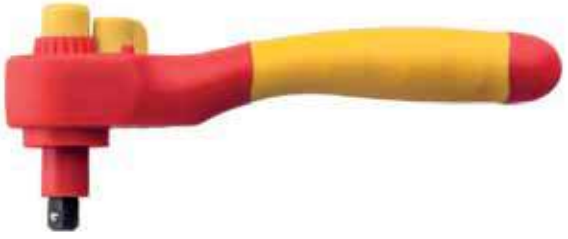

1000 V IEC 60900

Switchable

24619

Order-No.	■↕	mm	
43052	3/8"	200	1
43053	1/2"	250	1

Manufactured according to EN/IEC 60900.

Tool set mechanic

assorted 31-pcs. in bag **9300-026**

Order-No.		
36390		1
⊖	Screwdriver SoftFinish® Slotted with round blade and lasered mm scale 4,0 x 100 (36085) / 5,5 x 125 (35397)	
⊕	Screwdriver SoftFinish® Phillips with round blade and lasered mm scale PH1 x 80 (36072) / PH2 x 100 (35398)	
○	Screwdriver with T-handle and two bit holders ComfortGrip magnetic 1/4" 1/4 x 150 (26179)	
	High-leverage combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26713)	
⧗	Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180mm, 7" (41273)	
	Water pump pliers Classic with push button 250mm, 10" (26765)	
	Folding ruler Longlife 2 m metric, 10 segments (27057)	
⊕ ⊕ ❀	Bit set FlipSelector Standard 25 mm (39040) 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"	
✺	L-key set in ErgoStar holder (37351) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10	

Tool set mechanic

assorted 30-pcs. in bag **9300-024**

Order-No.		
36388		1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,0 x 100 (00687) / 5,5 x 125 (00698)	
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)	
○	Screwdriver with T-handle and bit holder magnetic 1/4" 1/4 x 150 (01481)	
⧗	Diagonal cutters Classic 160mm, 6 ½" (26739)	
	Water pump pliers Classic box type 250mm, 10" (26761)	
	Folding ruler Longlife 2 m metric, 10 segments (27057)	
⊕ ⊕ ❀	Bit set FlipSelector Standard 25 mm (39040) 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"	
✺	L-key set in Compact holder (01222) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10	

INFOBOX:
OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Tool set mechanic

screwdriver, combination pliers, 6-pcs. in bag **9300-019**

Order-No.	
33970	1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 4,5 x 125 (00697)
⊖	Screwdriver SoftFinish® Slotted with round blade 6,5 x 150 (00703)
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)
	Combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (26707)

Tool set mechanic

screwdriver, diagonal cutters, 6-pcs. in bag

9300-020

Order-No.	
33971	1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 4,5 x 125 (00697)
⊖	Screwdriver SoftFinish® Slotted with round blade 6,5 x 150 (00703)
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)
	Diagonal cutters Professional with DynamicJoint® 160mm, 6 ½" (26740)

Which drives are used for each individual product? Page 304

Tool set mechanic

screwdriver, diagonal cutters, combination pliers, 5-pcs. in bag

Z 99 0 006 02

Order-No.	
30824	1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 5,5 x 125 (00698)
⊕	Screwdriver SoftFinish® Phillips with round blade PH2 x 100 (00759)
	Combination pliers Industrial with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (30826)
	Diagonal cutters Industrial with DynamicJoint® With Wiha DynamicJoint®. 160mm, 6 ½" (30827)

Tool set operator kit ESD

5-pcs. in bag

9300-015

Order-No.	
33504	1
⊖	Screwdriver Precision ESD Slotted 2,5 x 50 (07636)
⊕	Screwdriver Precision ESD Phillips PH0 x 50 (07641)
	Universal tweezers Professional ESD Type AA 130mm, AA (32318)
	SMD belt shears (31989)
	Dust and dirt brush x (39141)

Tool set ESD

Pliers, screwdriver, tweezers, 9-pcs. in bag

9300-016

Order-No.	
33505	1
⊖	Screwdriver Precision ESD Slotted 2,0 x 40 (07635) / 2,5 x 50 (07636)
⊕	Screwdriver Precision ESD Phillips PH00 x 40 (07640) / PH0 x 50 (07641)
✱	Screwdriver Precision ESD TORX® T5 x 40 (07659) / T6 x 40 (07660)
	Needle nose pliers Professional ESD straight 120mm, 4 ¾" (26799)
	Diagonal cutters Professional ESD wide, pointed head without bevelled edge 115mm, 4 ½" (26821)
	Universal tweezers Professional ESD Type AA 130mm, AA (32318)

INFOBOX:

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Electro
Safety for professionals.

With the speedE® e-screwdriver, Wiha is revolutionising the screwdriver market. Whether handling delicate fastenings, long screws or very many screws, professionals have no trouble working with the e-screwdriver. The material protection function in particular makes the speedE® unique: At 0.4 Nm the electrical assistance stops automatically and allows the user to finish tightening the screw carefully by hand. In combination with the VDE certified slimBits the speedE® offers electricians full protection during their daily work.

The swivelling Wiha flashlight features an integrated laser, UV light and LED light with two lighting levels.

With Torque QuickCheck, Wiha is bringing the first portable quick tester for regular checks on torque tools onto the market, thus guaranteeing safe and precise work.

Application — Electro

Fastening

E-screwdriver, set 2, speedE®
Page 126

Surveying / marking

Flashlight with LED, laser and UV light
Page 128

Testing

Torque QuickCheck torque testing device
Page 129

E-screwdriver, set 1, speedE®

Slotted, Phillips, PlusMinus/Pozidriv, 10 pcs in L Boxx Mini with slimBits, batteries and EU charger

590 T101

Order-No.	SB	
41911	x	1

○	E-screwdriver handle speedE®
⊖	Bit slimBit electric Slotted, Tool tested at 10,000 V AC / 3,5 x 75 (41159) / 5,5 x 75 (34581)
⊕	Bit slimBit electric Phillips, Tool tested at 10,000 V AC / PH1 x 75 (34583) / PH2 x 75 (34584)
⊛	Bit slimBit electric PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)
	Battery set, 18500 Li-ion 2 units in box (41914)
	Charger for 18500 Li-ion batteries with USB and Europlug (41915)

E-screwdriver, set 2, speedE®

Mixed 13 pcs in L Boxx Mini with slimBits, easyTorque adapter, batteries and EU charger

590 T102

Order-No.	SB	
41912	x	1

○	E-screwdriver handle speedE®
⊖	Bit slimBit electric Slotted, Tool tested at 10,000 V AC / 3,5 x 75 (41159) / 5,5 x 75 (34581)
⊕	Bit slimBit electric Phillips, Tool tested at 10,000 V AC / PH1 x 75 (34583) / PH2 x 75 (34584)
⊛	Bit slimBit electric Pozidriv, Tool tested at 10,000 V AC / PZ1 x 75 (34585) / PZ2 x 75 (34586)
⊛	Bit slimBit electric PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)
	easyTorque electric torque adapter for slimBits and slimVario® holder in blister 2,8 ±10 % (41344)
	Battery set, 18500 Li-ion 2 units in box (41914)
	Charger for 18500 Li-ion batteries with USB and Europlug (41915)

Which drives are used for each individual product? Page 304

E-screwdriver, set 3, speedE®

Mixed 25 pcs in L Boxx Mini with slimBits, easyTorque adapters, batteries and EU charger

590 T103

Order-No.	SB	
41913	x	1

○	E-screwdriver handle speedE®
⊖	Bit slimBit electric Slotted, Tool tested at 10,000 V AC / 3,5 x 75 (41159) / 5,5 x 75 (34581)
⊕	Bit slimBit electric Phillips, Tool tested at 10,000 V AC / PH1 x 75 (34583) / PH2 x 75 (34584)
⊕	Bit slimBit electric Pozidriv, Tool tested at 10,000 V AC / PZ1 x 75 (34585) / PZ2 x 75 (34586)
⊕	Bit slimBit electric PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)
✱	Bit slimBit electric TORX®, Tool tested at 10,000 V AC / T10 x 75 (35507) / T15 x 75 (35508) / T20 x 75 (35509) / T25 x 75 (36071)
✺	Bit slimBit electric Hex, Tool tested at 10,000 V AC / 3 x 75 (37147) / 4 x 75 (37225) / 5 x 75 (37226) / 6 x 75 (37227)
	easyTorque electric torque adapter for slimBits and slimVario® holder in blister 4,0 ± 10 % (41345) / 0,8 Nm ± 10 % (41341) / 2,0 Nm ± 10 % (41342) / 2,5 Nm ±10 % (41343) / 2,8 Nm ±10 % (41344)
	Battery set, 18500 Li-ion 2 units in box (41914)
	Charger for 18500 Li-ion batteries with USB and Europlug (41915)

Battery set, 18500 Li-ion

2 units in box

599001

Order-No.	
41914	6

Charger for 18500 Li-ion batteries

with USB and Europlug

599002

Order-No.	
41915	1

INFOBOX:
Wiha speedE®

E-screwdriver speedE®

- Power-assisted screw-driving halves working time.
- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.
- Final screw tightening can then be carried out by hand.
- Recommended by doctors and therapists.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.

Flashlight with LED, laser and UV light

in blister pack, including 3 AAA batteries

SB 246 70

Order-No.	LED	✳	UV		SB	
41286	100 / 310 lm	Class 2	390 - 400 nm	3 x AAA batteries	x	5

INFOBOX:

Flashlight with LED, laser and UV light

- Universal work tool with integrated laser, UV light and LED light.
- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.

Torque QuickCheck torque testing device

with adapter blades and batteries in box **2909101**

Order-No.	Nm	±%	SB	
42086	2,8	2	x	1

INFOBOX:
Torque QuickCheck

Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.

Screwdrivers

We have the know-how at the tip of our fingers.

Unlike many standard tools available on the market, Wiha screwdrivers are optimally designed for users' requirements. Thanks to Wiha's screwdriver handle size concept, four handle sizes and lengths, optimally adapted to their specific fastening or work task, ensure health-friendly work practices. With SoftFinish, Wiha became the world's first and only hand tool manufacturer to have products honoured with the renowned AGR quality seal - a seal of approval accepted by medical professionals and officially recommended by doctors and therapists. Wiha screwdrivers featuring SoftFinish are available for dry applications, damp and oily applications and as VDE-certified, insulated screwdrivers for use when working on live parts..

Wiha is the world's first hand tool manufacturer to receive AGR (Association for healthy backs) certification for its Inomic pliers and ergonomic screwdriver handle size concept, a seal of approval accepted by medical professionals and officially recommended by doctors and physiotherapists.

Application

Screwdrivers

For applications in electrics

Screwdriver and bit set slimVario® screwdriver assorted 18-pcs. in bag
Page 132

Screwdriver set SoftFinish® electric slimFix assorted 12-pcs.
Page 133



Screwdriver set SoftFinish® electric slimFix
Page 134

Screwdriver with bit holder set SoftFinish® electric slimVario® Stubby, 4-pcs.
Page 136

slimBit electric bit set
Page 136

Bit slimBit electric
Page 137

Screwdriver SoftFinish® electric slimFix
Page 138

Screwdriver SoftFinish® electric
Page 139

Fine screwdriver PicoFinish electric
Page 140

SoftFinish® voltage tester
Page 141

For applications in mechanics

Screwdriver set SoftFinish® assorted 12-pcs.
Page 142

Screwdriver set SoftFinish®
Page 142

Screwdriver set SoftFinish® Solid steel cap and hexagon head
Page 144

Fine screwdriver set PicoFinish
Page 145

Screwdriver SoftFinish® With round blade
Page 146

Screwdriver SoftFinish® Solid steel cap and hexagon head
Page 150

Fine screwdriver PicoFinish
Page 152

Screwdriver SoftFinish® Phillips with short round blade, Stubby
Page 151

Screwdriver MicroFinish® Solid steel cap and hexagon head
Page 155

Screwdriver MicroFinish®
Page 155

Screwdriver MicroFinish® Solid steel cap and hexagon head
Page 156

Screw extractor set Hexagon with spiral drill bit 8-pcs.
Page 156

For applications in electronics

Screwdriver set SoftFinish® ESD
Page 157

Screwdriver set Precision ESD
Page 157

Screwdriver SoftFinish® ESD
Page 158

Screwdriver SoftFinish® ESD Phillips Stubby
Page 158

Screwdriver and bit set slimVario® screwdriver

assorted 18-pcs. in bag

2831 T18

Order-No.	
41231	1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, Tool tested at 10,000 V AC
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario For slimBits, Tool tested at 10,000 V AC
- 1 x 2,5 / 1 x 3,5 / 1 x 5,5
- 1 x PH1 / 1 x PH2
- 1 x PZ1 / 1 x PZ2
- 1 x SL/PZ1 / 1 x SL/PZ2
- 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20
- 1 x 3 / 1 x 4 / 1 x 5

Manufactured acc. to IEC 60900.

INFOBOX:
slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Screwdriver and bit set slimVario® screwdriver

Slotted, Phillips, Pozidriv, 9-pcs. in bag

2831 T9 01

Order-No.	
41232	1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, Tool tested at 10,000 V AC
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario For slimBits, Tool tested at 10,000 V AC
- 1 x 2,5 / 1 x 3,5 / 1 x 5,5
- 1 x PH1 / 1 x PH2
- 1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv, 9-pcs. in bag

2831 T9 02

Order-No.	
41233	1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, Tool tested at 10,000 V AC
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario For slimBits, Tool tested at 10,000 V AC
- 1 x 2,5 / 1 x 3,5 / 1 x 5,5
- 1 x PZ1 / 1 x PZ2
- 1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric slimFix

assorted 12-pcs. **3201 K12**

Order-No.	
41003	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100
⊕	PZ1 x 80 / PZ2 x 100
⊛	SL/PZ2 x 100
✱	T15 x 100 / T20 x 100 / T25 x 125

INFOBOX:
Handle size concept



Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning - Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones (length) vary significantly over the four handle sizes in various forms.
- The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Screwdriver set SoftFinish® electric slimFix

Slotted, Phillips 6-pcs. — 3201 K6

Order-No.	
35389	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100

Manufactured acc. to IEC 60900.

Slotted, Phillips, PlusMinus/Pozidriv 6-pcs. — 3201 K601

Order-No.	
38362	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125
⊕	PH1 x 80 / PH2 x 100
✠	SL/PZ2 x 100

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. — 3201 ZK6

Order-No.	
36455	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
✠	PZ1 x 80 / PZ2 x 100

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole) 6-pcs. — 3251 TR K6

Order-No.	
41245	1
✡	T10H x 100 / T15H x 100 / T20H x 100 / T25H x 125 / T30H x 125 / T40H x 150

Manufactured acc. to IEC 60900.

TORX® 6-pcs. — 3251 K6

Order-No.	
36558	1
✡	T8 x 60 / T9 x 60
✡	T10 x 100 / T15 x 100 / T20 x 100 / T25 x 125

• no slim version
Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric slimFix

Slotted, Phillips, 2-pcs. in blister pack — SB 3201 S201

Order-No.	
36331	1
⊖	3,5 x 100
⊕	PH2 x 100

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, 2-pcs. in blister pack — SB 3201 S202

Order-No.	
36332	1
⊖	3,5 x 100
✠	PZ2 x 100

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv, 2-pcs. in blister pack — SB 3201 S204

Order-No.	
36333	1
⊖	3,5 x 100
✠	SL/PZ2 x 100

Manufactured acc. to IEC 60900.

INFOBOX:
Combination profiles

PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.

Which drives are used for each individual product? Page 304

Screwdriver set SoftFinish® electric

1000 V IEC 60900

Slotted, Phillips 7-pcs. — 320N K7

Order-No.	
00834	1
⊖	2,5 x 75 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100
⊖	Voltage tester SoftFinish® single-pole, 110-250 volts

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. — 320N K6

Order-No.	
00833	10
⊖	3,0 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. — 320N ZK6 SO

Order-No.	
25477	1
⊖	2,5 x 75 / 3,5 x 100 / 4,5 x 125 / 5,5 x 125
✻	PZ1 x 80 / PZ2 x 100

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric

1000 V IEC 60900

PlusMinus/Phillips in blister pack 2-pcs. — SB 327 S2

Order-No.	
32281	1
⊕	SL/PH1 x 80 / SL/PH2 x 100

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv, 2-pcs. in blister pack — SB 328 S2

Order-No.	
32282	1
✻	SL/PZ1 x 80 / SL/PZ2 x 100

DIN ISO 2380. Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric

1000 V IEC 60900

Hexagon nut driver 5-pcs. — 322 K5

Order-No.	
29466	1
○	5,5 x 125 / 7 x 125 / 8 x 125 / 10 x 125 / 13 x 125

Manufactured acc. to IEC 60900.

Screwdriver with bit holder set SoftFinish® electric slimVario®

Stubby, 4-pcs.

SB 2831 0101

Order-No.	
41230	1

○	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits Tool tested at 10,000 V AC
⊖	3,5 x 75
⊕	PH2 x 75
✱	SL/PZ2 x 75

Manufactured acc. to IEC 60900.

Fine screwdriver set PicoFinish® electric

Slotted, Phillips, 6-pcs.

227P

Order-No.	
42989	1
⊖	2,0 x 50 / 2,5 x 65 / 3 x 65 / 1,5 x 50
⊕	PH00 x 50 / PH0 x 65

slimBit electric bit set

TORX®, 6-pcs. in box

2831-B604

Order-No.	
42210	6
✱	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, 6-pcs. in box

2831-B605

Order-No.	
42211	6
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
✱	1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Slotted, Phillips, 6-pcs. in box

2831-B606

Order-No.	
42212	6
⊖	1 x 6,5 / 1 x 2,5 / 1 x 5,5 / 1 x 3,5
⊕	1 x PH1 / 1 x PH2

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv, 6-pcs. in box

2831-B607

Order-No.	
42213	6
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
✱	1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in box

2831-B608

Order-No.	
42214	6
●	1 x 2 / 1 x 2,5 / 1 x 3 / 1 x 4 / 1 x 5 / 1 x 6

Manufactured acc. to IEC 60900.

INFOBOX:
PicoFinish electric

Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

Which drives are used for each individual product? Page 304

Bit slimBit electric

Slotted

2831-10

Order-No.	⊖	mm	⊖↕	◉↕	max. Nm	
34578	2,5•	75	0,4	6.0	0,4	5
34579	3,0•	75	0,5	6.0	0,6	5
41159	3,5	75	0,6	6.0	2,5	5
34580	4,0	75	0,8	6.0	2,5	5
34581	5,5	75	1,0	6.0	5,5	5
34582	6,5	75	1,2	6.0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Phillips

2831-11

Order-No.	⊕	mm	◉↕	max. Nm	
34583	PH1	75	6,0	3.8	5
34584	PH2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

Pozidriv

2831-12

Order-No.	⊕	mm	◉↕	max. Nm	
34585	PZ1	75	6,0	3.8	5
34586	PZ2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

2831-13

Order-No.	⊕	mm	◉↕	max. Nm	
34587	SL/PH1	75	6,0	3.8	5
34588	SL/PH2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

2831-14

Order-No.	⊕	mm	◉↕	max. Nm	
34589	SL/PZ1	75	6,0	3.8	5
34590	SL/PZ2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

TORX®

2831-15

Order-No.	✱	mm	◉↕	max. Nm	
35506	T8•	75	6,0	1.3	5
41160	T9•	75	6,0	1.3	5
35507	T10•	75	6,0	3.8	5
35508	T15	75	6,0	5.0	5
35509	T20	75	6,0	5.5	5
36071	T25	75	6,0	5.5	5

• no slim version
Manufactured acc. to IEC 60900.

Hex

2831-18

Order-No.	◉	mm	◉↕	max. Nm	
37222	1,5•	75	6,0	0.9	5
37223	2•	75	6,0	1.8	5
37224	2,5	75	6,0	3.8	5
37147	3	75	6,0	5.5	5
37225	4	75	6,0	5.5	5
37226	5	75	6,0	5.5	5
37227	6	75	6,0	5.5	5

• no slim version
Manufactured acc. to IEC 60900.

Square

2831-17

Order-No.	■	■	mm	◉↕	max. Nm	
35510	#1	2,3	75	6.0	5,5	5
35511	#2	2,8	75	6.0	5,5	5

Manufactured acc. to IEC 60900.

Screwdriver with bit holder SoftFinish® electric slimVario

For slimBits

283100

Order-No.	○			mm		
34577	6	30	50	160	13	5

Manufactured acc. to IEC 60900.

1000 V IEC 60900

Slotted

3201

Order-No.	⊖		⊖	mm		
35446	3,5	100	0,6	204	23	10
35390	4,0	100	0,8	211	30	10
35501	4,5	125	1,0	236	30	10
35391	5,5	125	1,0	243	36	10
35392	6,5	150	1,2	268	36	10

DIN ISO 2380. Manufactured acc. to IEC 60900.

Phillips

3211

Order-No.	⊕		mm		SB	
35393	PH1	80	191	30		10
35394	PH2	100	218	36		10

DIN ISO 8764-PH. Manufactured acc. to IEC 60900.

Pozidriv

3241

Order-No.	⊕		mm		SB	
35395	PZ1	80	191	30		10
35396	PZ2	100	218	36		10

DIN ISO 8764-PZ. Manufactured acc. to IEC 60900.

PlusMinus/Phillips

3271

Order-No.	⊕		mm		
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

3281

Order-No.	⊕		mm		SB	
36329	SL/PZ1	80	191	30		10
36330	SL/PZ2	100	218	36		10

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole)

3251 TR

Order-No.			mm		
41141	T10H	100	204	23	10
41142	T15H	100	211	30	10
41143	T20H	100	211	30	10
41144	T25H	125	243	36	10
41145	T27H	125	243	36	10
41146	T30H	125	243	36	10
41147	T40H	150	268	36	10

Manufactured acc. to IEC 60900.

TORX®

3251

Order-No.			mm		
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	10

DIN ISO 8764-PH. Manufactured acc. to IEC 60900.

Square

3581

Order-No.				mm		
35504	#1	2,3	100	211	30	10
35505	#2	2,8	125	243	36	10

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 304

1000 V IEC 60900

Slotted

320N

Order-No.	⊖		⊖	mm		
00819	2,0	60	0,4	164	23	10
00820	2,5	75	0,4	179	23	10
00821	3,0	100	0,5	204	23	10
00822	3,5	100	0,6	204	23	10
00823	4,0	100	0,8	211	30	10
00824	4,5•	125	1,0	236	30	10
00825	4,5•	175	1,0	286	30	5
31863	4,5	200	1,0	311	30	5
00826	5,5	125	1,0	243	36	10
00827	5,5•	175	1,0	293	36	5
00828	6,0•	150	1,2	268	36	10
00829	6,5	150	1,2	268	36	10
00830	8,0	175	1,2	299	41	10
00831	8,0	175	1,6	299	41	10
00832	10,0•	200	1,6	324	41	5

• Additional dimension. Non-DIN size.
Manufactured acc. to IEC 60900.

Phillips

321N

Order-No.	⊕		mm		
00846	PH0	60	164	23	10
00847	PH1	80	191	30	10
00848	PH2	100	218	36	10
00849	PH3	150	268	41	10
00850	PH4	200	318	41	5

Manufactured acc. to IEC 60900.

Pozidriv

324

Order-No.	⊕		mm		
00877	PZ0	60	164	23	10
00878	PZ1	80	191	30	10
00879	PZ2	100	218	36	10
00880	PZ3	150	324	41	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

327

Order-No.	⊕		mm		
30716	SL/PH1	80	191	30	10
30715	SL/PH2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

328

Order-No.	⊕		mm		
30700	SL/PZ1	80	191	30	10
30701	SL/PZ2	100	218	36	10

Manufactured acc. to IEC 60900.

TORX®

325

Order-No.			mm		
03760	T5	60	164	23	10
03761	T6	60	164	23	10
03762	T7	60	164	23	10
00881	T8	60	164	23	10
00882	T9•	60	164	23	10

Manufactured acc. to IEC 60900.

Hex

323N

Order-No.			mm		
30361	2,5	75	179	23	10
30362	3,0	75	179	23	10
30363	4,0	75	186	30	10
30364	5,0	75	186	30	10
30365	6,0	100	218	36	10
30366	8,0	100	218	36	10

Manufactured acc. to IEC 60900.

Square

358N

Order-No.				mm		
32396	#1	2,3	100	211	30	10
32397	#2	2,8	150	268	36	10

Manufactured acc. to IEC 60900.

Screwdriver SoftFinish® electric

1000 V IEC 60900

Hex nut driver

322

Order-No.			mm			
00853	4	125	236	30	10,2	10
00855	5	125	236	30	11,2	10
00856	5,5	125	236	30	11,2	10
00857	6	125	236	30	12,2	10
00858	7	125	243	36	14,5	10
00859	8	125	243	36	15,2	10
00860	9	125	243	36	16,0	10
00861	10	125	243	36	17,2	10
00862	11	125	243	41	19,2	10
00863	12	125	243	41	20,2	10
00864	13	125	243	41	22,2	10
00865	14	125	243	41	23,2	10
00866	15	125	243	41	25,2	10
00867	16	125	243	41	25,2	10
00868	17	125	243	41	27,2	10

Manufactured acc. to IEC 60900.

Fine screwdriver PicoFinish electric

1000 V IEC 60900

Slotted

2270P

Order-No.				mm		
42374	1,5	50	2,0	152	18	10
42375	2,0	50	2,0	152	18	10
42376	2,5	65	2,5	167	18	10
42377	3	65	3	167	18	10
42471	3,5	65	3,5	167	18	10

Phillips

2271P

Order-No.				mm		
42379	PH00	50	2	152	18	10
42378	PH0	65	3	167	18	10
42380	PH1	65	4	167	18	10

Which drives are used for each individual product? Page 304

SoftFinish® voltage tester

⊖ **255-11**

Order-No.	⊖		⊖	mm		
34745	3,0	60	0,5	140	19	10

Tested according to DIN 57680-6, GS, CE compliant.

⊖ in blister pack

SB 255-11

Order-No.	⊖		⊖	mm		
35378	3,0	60	0,5	140	19	5

Tested according to DIN 57680-6, GS, CE compliant.

Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC

255-12

Order-No.	●	mm	
37871	4,2	149	10

IEC 61010-1

in blister pack

SB 255-12

Order-No.	●	mm	
37872	4,2	149	5

IEC 61010-1

Voltage tester 220-250 volts

1000 V IEC 60900

⊖ Slotted transparent, with push-on clip

255-3

Order-No.	⊖		mm		
05271	3,0	60	140	15	10

⊖ Slotted transparent, with push-on clip in blister pack

SB 255-3

Order-No.	⊖		mm		
32201	3,0	60	140	15	5

Voltage tester 150-250 volts

⊖ Slotted black, with push-on clip

255-7

Order-No.	⊖		mm		
00456	3,0	60	160	17	10

⊖ Slotted black, with push-on clip in blister pack

SB 255-7

Order-No.	⊖		mm		
31771	3,0	60	160	17	1

Screwdriver set SoftFinish®

assorted 12-pcs. — 302 HK12

Order-No.	
41002	1
⊖	4,0 x 100 / 3,5 x 100 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100 / PH3 x 150
⊕	PZ1 x 80 / PZ2 x 100
✱	T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115

INFOBOX:
Wiha SoftFinish® screwdriver

The convenient expert for dry applications.

- The SoftFinish handle provides optimal grip for dry applications in trade and industry.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Screwdriver set SoftFinish®

Slotted, Phillips 6-pcs. — 302 HK6 SO

Order-No.	
07152	1
⊖	3,5 x 100 / 4,5 x 125 / 5,5 x 150 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100

Phillips, Pozidriv 6-pcs. — 302 HK 601

Order-No.	
26113	1
⊖	4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100
⊕	PZ2 x 100

Slotted, Pozidriv 6-pcs. — 302 ZK6 SO

Order-No.	
07153	1
⊖	3,5 x 100 / 4,5 x 125 / 5,5 x 150 / 6,5 x 150
⊕	PZ1 x 80 / PZ2 x 100

TORX® ball end 6-pcs. — 362BE K6

Order-No.	
32249	1
✱	T9 x 60 / T10 x 60 / T15 x 80 / T20 x 80 / T25 x 100 / T30 x 115

TORX® MagicSpring® 6-pcs. — 362R K6 SO

Order-No.	
27746	1
✱	T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115 / T40 x 130

TORX® 6-pcs. — 362 K6 SO

Order-No.	
07155	1
✱	T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115 / T40 x 130

TORX® 7-pcs. — 362 K7

Order-No.	
01299	1
✱	T8 x 60 / T9 x 60 / T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115

TORX® Tamper Resistant (with hole) 6-pcs. — 362TR K6

Order-No.	
24506	1
✱	T10H x 80 / T15H x 80 / T20H x 100 / T25H x 100 / T30H x 115 / T40H x 130

Which drives are used for each individual product? Page 304

Screwdriver set SoftFinish®

Hexagon nut driver 5-pcs. **341 K5**

Order-No.	
01034	1
○	5,5 x 125 / 7 x 125 / 8 x 125 / 10 x 125 / 13 x 125

Screwdriver set SoftFinish®

Slotted, Phillips with hexagon head 6-pcs. **308 HK6**

Order-No.	
21248	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 7,0 x 125
⊕	PH1 x 80 / PH2 x 100

Slotted, Pozidriv with hexagon head, 6-pcs. **308 ZK6**

Order-No.	
21249	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 7,0 x 125
⊗	PZ1 x 80 / PZ2 x 100

INFOBOX:
MagicRing®



Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

INFOBOX:
MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

INFOBOX:
TORX® ball end

Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

Screwdriver set SoftFinish®

Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs.

530 HK6

Order-No.		
21250		1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 6,5 x 125	
⊕	PH1 x 80 / PH2 x 100	

Slotted, Pozidriv hexagonal blade and solid steel cap, 6-pcs.

530 ZK6

Order-No.		
21251		1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 6,5 x 125	
⊗	PZ1 x 80 / PZ2 x 100	

Screwdriver set SoftFinish®

Slotted, Phillips with lasered mm scale in blister pack, 2-pcs.

SB 3021 S2

Order-No.		
36205		1
⊖	5,5 x 125	
⊕	PH2 x 100	

DIN ISO 2380.

INFOBOX:

Solid steel cap and hexagon head

- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Which drives are used for each individual product? Page 304

Slotted, Phillips 7-pcs. — 260P

Order-No.	
42991	1
⊖	1,5 x 40 / 2,0 x 40 / 2,5 x 50 / 3,0 x 50
⊕	PH00 x 40 / PH0 x 50 / PH1 x 60

Slotted, Phillips, 6 pcs. with holder — 260P

Order-No.	
42990	1
⊖	1,5 x 40 / 2,0 x 40 / 2,5 x 50 / 3,0 x 50
⊕	PH00 x 40 / PH0 x 50

TORX® MagicSpring®, 6 pcs. with holder — 267PR

Order-No.	
42998	1
✱	T6 x 40 / T7 x 40 / T8 x 40 / T9 x 50 / T10 x 50 / T15 x 60

TORX®, 6 pcs. with holder — 267P

Order-No.	
42996	1
✱	T7 x 40 / T8 x 40 / T9 x 50 / T10 x 50 / T15 x 60 / T20 x 60

TORX®, 6 pcs. with holder — 267P

Order-No.	
42997	1
✱	T4 x 40 / T5 x 40 / T6 x 40 / T7 x 40 / T8 x 40 / T9 x 50

Hexagonal ball end, 6 pcs. with holder — 264P

Order-No.	
42993	1
●	0,9 (0,035") x 40
●	1,3 (0,05") x 40 / 1,5 x 50 / 2,0 x 50 / 2,5 x 60 / 3,0 x 60

Hex, 6 pcs. with holder — 263P

Order-No.	
42992	1
●	0,9 (0,035“) x 40 / 1,3 (0,05“) x 40 / 1,5 x 50 / 2,0 (5/64“) x 50 / 2,5 x 60 / 3,0 x 60

Hexagon nut driver 6-pcs. with holder — 265P

Order-No.	
42994	1
●	2,5 x 60 / 3,0 x 60 / 3,5 x 60 / 4,0 x 60 / 5 x 60 / 5,5 x 60

INFOBOX:
PicoFinish

Wiha PicoFinish precision screwdriver

- The comfortable precision screwdriver for fine and delicate fastenings.
- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

Screwdriver SoftFinish®

With round blade for low-lying screws

With round blade

Slotted with round blade for low-lying screws

302

Order-No.	⊖		⊖	●	mm		
00684	2,0•	65	0,4	2.0	169	23	10
00685	2,5	75	0,4	2.5	179	23	10
00686	3,0•	80	0,5	3.0	184	23	10
00687	3,0	100	0,5	3.0	204	23	10
00689	3,0•	150	0,5	3.0	254	23	10
00690	3,0•	200	0,5	3.0	304	23	10
32383	3,0	300	0,5	3.0	404	23	5
00691	3,5	100	0,6	3.5	204	23	10
26931	3,5•	200	0,6	3.5	304	23	10
00692	4,0	100	0,8	4.0	211	30	10
00694	4,0•	150	0,8	4.0	261	30	10
00695	4,0•	200	0,8	4.0	311	30	10
00696	4,0•	300	0,8	4.0	411	30	10
27753	4,5•	80	0,8	4.5	191	30	10
00697	4,5•	125	0,8	4.5	236	30	10
00698	5,5	125	1,0	5.5	236	30	10
00700	5,5	150	1,0	5.5	261	30	10
00701	5,5•	200	1,0	5.5	311	30	10
00702	5,5•	300	1,0	5.5	411	30	5
32384	6,0•	300	1,0	6.0	418	36	5

• Additional dimension. Non-DIN size.

Slotted with round blade

302

Order-No.	⊖		⊖	●	mm		
27754	6,0	100	1,0	5.5	218	36	10
27755	6,0	150	1,0	5.5	268	36	10
00704	6,5	100	1,2	6.0	218	36	10
00703	6,5	150	1,2	6.0	268	36	10
00706	6,5•	200	1,2	6.0	318	36	10
00708	8,0	150	1,2	7.0	274	41	10
00707	8,0	175	1,2	7.0	299	41	10
00709	8,0	175	1,6	7.0	299	41	5
32399	8,0	300	1,2	7.0	424	41	5
00711	10,0	200	1,6	8.0	324	41	10
32400	10,0	300	1,6	8.0	424	41	5
00712	12,0	250	2,0	8.0	374	41	10
00713	14,0•	250	2,5	11.0	374	41	10

• Additional dimension. Non-DIN size.
DIN ISO 2380.

Phillips with round blade

311

Order-No.	⊕		●	mm		
00754	PH0	60	3,0	164	23	10
27756	PH0	100	3,0	204	23	10
00756	PH1	80	4,5	191	30	10
27757	PH1	100	4,5	211	30	10
00757	PH1•	200	4,5	311	30	10
03738	PH1•	300	4,5	411	30	5
00759	PH2	100	6,0	218	36	10
27758	PH2	150	6,0	268	36	10
00760	PH2•	200	6,0	318	36	10
03739	PH2•	300	6,0	418	36	5
00762	PH3	150	8,0	274	41	10
00763	PH4•	200	10,0	324	41	10

• Additional dimension. Non-DIN size.
DIN ISO 8764-PH.

Pozidriv with round blade

313

Order-No.	⊕		●	mm		
00768	PZ0	60	3,0	164	23	10
00770	PZ1	80	4,5	191	30	10
26454	PZ1	300	4,5	411	30	5
00772	PZ2	100	6,0	218	36	10
26455	PZ2	300	6,0	418	36	5
00774	PZ3	150	8,0	274	41	10

TORX® ball end with hexagonal blade

362BE

Order-No.	✱		●	⬢	mm		
32250	T9	60	7/64	2.8	164	23	10
32251	T10	60	1/8	3.2	184	23	10
32252	T15	80	9/64	3.6	191	30	10
32253	T20	80	5/32	4.0	211	30	10
32254	T25	100	3/16	4.8	218	36	10
32255	T27	115	7/32	5.6	233	36	10
32256	T30	115	1/4	6.4	233	36	10

TORX® MagicSpring® with round blade

362R

Order-No.	✱		●	mm		
27736	T6	60	3,5	164	23	10
27737	T7	60	3,5	164	23	10
27738	T8	60	3,5	164	23	10
27739	T9	60	4,0	171	30	10
27740	T10	80	4,0	191	30	10
27741	T15	80	4,0	191	30	10
27742	T20	100	4,0	218	36	10
27743	T25	100	4,5	218	36	10
27811	T27	115	5,5	233	36	10
27744	T30	115	6,0	233	36	10
27745	T40	130	7,0	254	41	10

Which drives are used for each individual product? Page 304

TORX® with round blade

362

Order-No.				mm		
26259	T3	60	2,5	164	23	10
26260	T4	60	2,5	164	23	10
01285	T5	60	2,5	164	23	10
01286	T6	60	3,5	164	23	10
01287	T7	60	3,5	164	23	10
01288	T8	60	3,5	164	23	10
01289	T9	60	4,0	171	30	10
01290	T10	80	4,0	191	30	10
01291	T15	80	4,0	191	30	10
01292	T20	100	4,0	218	36	10
01293	T25	100	4,5	218	36	10
01294	T27	115	5,5	233	36	10
01295	T30	115	6,0	233	36	10
01296	T40	130	7,0	254	41	10
01297	T45	130	8,0	254	41	5

TORX® Tamper Resistant (with hole) with round blade

362TR

Order-No.				mm		
03106	T7H	60	3,5	164	23	10
03107	T8H	60	3,5	164	23	10
03108	T9H	60	4,0	171	30	10
26456	T9H	300	4,0	411	30	5
01300	T10H	80	4,0	191	30	10
26457	T10H	300	4,0	411	30	5
01301	T15H	80	4,0	191	30	10
26458	T15H	300	5,0	411	30	5
01302	T20H	100	4,0	211	30	10
28005	T20H	300	5,0	411	30	5
01303	T25H	100	4,5	211	30	10
01304	T27H	115	5,5	233	36	10
01305	T30H	115	6,0	233	36	10
01306	T40H	130	7,0	254	41	10

TORX PLUS® MagicSpring® with round blade

362RIP

Order-No.				mm		
28760	6IP	60	3,5	164	23	10
28761	7IP	60	3,5	164	23	10
28762	8IP	60	3,5	164	23	10
28763	9IP	60	4,0	171	30	10
28764	10IP	80	4,0	191	30	10
28765	15IP	80	4,0	191	30	10
28766	20IP	100	4,0	218	36	10
28767	25IP	100	4,5	218	36	10
28769	30IP	115	6,0	233	36	10
28770	40IP	130	7,0	254	41	10

TORX PLUS® with round blade

362IP

Order-No.				mm		
26091	6IP	60	3,5	164	23	10
26093	7IP	60	3,5	164	23	10
26095	8IP	60	3,5	164	23	10
26097	9IP	60	4,0	171	30	10
26099	10IP	80	4,0	191	30	10
26101	15IP	80	4,0	191	30	10
26103	20IP	100	4,0	218	36	10
26105	25IP	100	4,5	218	36	10
26107	27IP	115	5,5	233	36	10
26109	30IP	115	6,0	233	36	10
26111	40IP	130	7,0	254	41	10

MagicRing® hexagonal ball end with hexagonal blade

367R

Order-No.			mm		
26077	3	100	204	23	10
26079	4	100	211	30	10
26081	5	100	211	30	10
26083	6	125	243	36	10
26085	8	150	268	36	10
26087	10	150	271	41	5

Hexagonal ball end with hexagonal blade

367

Order-No.			mm		
26303	1,5	75	179	23	10
26304	2	100	204	23	10
26305	2,5	100	204	23	10
26328	3	100	204	23	10
26329	4	100	211	30	10
26330	5	100	211	30	10
26331	6	125	243	36	10
26332	8	150	268	36	10
26333	10	150	271	41	5
26307	12	150	271	41	5

Hexagon with hexagonal blade

356

Order-No.			mm		
32264	1,5	60	164	23	10
32265	2	60	164	23	10
26190	2,5	75	179	23	10
26191	3	75	179	23	10
26192	4	75	186	30	10
26193	5	75	186	30	10
26194	6	100	218	36	10
26195	8	100	218	36	10

Screwdriver SoftFinish®

Hexagon angled

357

Order-No.	◉				mm	
26230	3	35	20	139	23	10
26231	4	40	25	151	30	10
26232	5	45	28	156	30	10
26233	6	50	32	168	36	10
26234	8	60	36	178	36	10
26235	10	75	40	199	41	10

Screwdriver SoftFinish®

Hexagon nut driver, inch design with round blade and hexagon head

347 Zoll

Order-No.				mm		mm	
02836	3/16	125	10	231	30	4,76	10
02837	1/4	125	10	238	36	6,35	10
02838	5/16	125	10	238	36	7,94	10
02839	3/8	125	10	238	36	9,53	10
02840	7/16	125	13	246	41	11,11	10
02841	1/2	125	13	246	41	12,70	10

Screwdriver SoftFinish®

Hexagon nut driver with round blade

341

Order-No.			mm			
01018	4	125	236	30	6,9	10
01020	5	125	236	30	7,9	10
01021	5,5	125	236	30	7,9	10
01022	6	125	236	30	8,9	10
01023	7	125	243	36	10,9	10
01024	8	125	243	36	11,9	10
01025	9	125	243	36	12,9	10
01026	10	125	243	36	14,4	10
01027	11	125	249	41	15,9	10
01028	12	125	249	41	16,9	10
01029	13	125	249	41	18,4	10
01030	14	125	249	41	19,4	10
01031	15	125	249	41	21,9	10
01032	16	125	249	41	21,9	10
01033	17	125	249	41	23,4	10

Hexagon nut driver with short round blade

343

Order-No.			mm			
01076	5,5	65	176	30	8	10
01077	6	65	176	30	9	10
01078	7	65	183	36	11	10
01079	8	65	183	36	12	10
01081	10	65	183	36	14	10

Which drives are used for each individual product? Page 304

Screwdriver SoftFinish®

Hexagon nut driver with flexible shaft

372

Order-No.			mm			
01435	5	150	261	30	8	10
01436	5,5	150	261	30	8	10
01437	6	150	261	30	9	10
01438	7	150	268	36	11	10
01439	8	150	268	36	12	10
01440	10	175	293	41	14	10
01443	13	175	293	41	19	10

Screwdriver SoftFinish®

Triangular socket wrench

344

Order-No.				mm			
26212	M4	125	6,8	236	30	11	10
26213	M5	125	8,3	236	30	13	10
26216	M6	125	10,05	236	30	16	10
26214	M8	125	12,05	243	36	18	10
26217	M10	125	15,05	243	36	22	10
26218	M12	125	16,55	249	41	24	10

DIN 22416.

Screwdriver SoftFinish®

Hexagon nut driver with round blade and hexagon head

347

Order-No.				mm			
01092	7	125	10	238	36	11,0	10
01093	8	125	10	238	36	12,0	10
01094	9	125	10	238	36	13,0	10
01095	10	125	10	238	36	14,5	10
01096	11	125	13	246	41	16,0	10
01097	12	125	13	246	41	17,0	10
01098	13	125	13	246	41	19,0	10

Screwdriver SoftFinish®

Slotted with one-piece hexagonal blade and solid steel cap

530

Order-No.	⊖		⊖	⬢	⬡	mm	
03223	3,5	75	0,6	4.0	-	186	10
03224	4,5•	90	0,8	4.0	-	201	10
03225	5,5	100	1,0	5.0	8	213	10
03226	6,5	125	1,2	6.0	10	238	10
03228	8,0	150	1,2	8.0	13	271	5
03230	10,0	175	1,6	8.0	13	296	5
03231	12,0	200	2,0	10.0	16	321	5
03232	14,0•	250	2,5	10.0	16	371	5

• Additional dimension. Non-DIN size.

Phillips with one-piece hexagonal blade and solid steel cap

531

Order-No.	⊕		⬢	⬡	mm		
03237	PH1	80	5,0	8	186	30	10
03238	PH2	100	6,0	10	213	36	10
03239	PH3	150	8,0	13	268	41	10

Pozidriv with one-piece hexagonal blade and solid steel cap

532

Order-No.	⊛		⬢	⬡	mm		
03245	PZ1	80	5,0	8	186	30	10
03246	PZ2	100	6,0	10	213	36	10
03247	PZ3	150	8,0	13	268	41	10

Screwdriver SoftFinish®

Slotted with round blade and lasered mm scale

3021

Order-No.	⊖		⊖	●	mm		
36085	4,0	100	0,8	4.0	211	30	10
35397	5,5	125	1,0	5.5	236	30	10

DIN ISO 2380.

Phillips with round blade and lasered mm scale

3111

Order-No.	⊕		●	mm		Scale	
36072	PH1	80	4,5	191	30	20-70	10
35398	PH2	100	6,0	218	36	20-90	10

DIN ISO 8764-PH.

Pozidriv with round blade and lasered mm scale

3131

Order-No.	⊛		●	mm		Scale	
36073	PZ1	80	4,5	191	30	20-70	10
35399	PZ2	100	6,0	218	36	20-90	10

DIN ISO 8764-PZ.

Screwdriver SoftFinish®

Slotted with fixing function

398

Order-No.	⊖		⊖	mm		
32867	2,5	75	0,4	186	30	5
32868	3,0	100	0,5	211	30	5
32869	4,0	125	0,8	243	36	5
32870	5,0	150	1,0	268	36	5
32871	6,0	175	1,2	293	36	5

Phillips with fixing function

397

Order-No.	⊕		mm		
32406	PH0	100	211	30	5
32404	PH1	125	236	36	5
32405	PH2	175	286	36	5

Which drives are used for each individual product? Page 304

Screwdriver SoftFinish®

Slotted with short round blade

302

Order-No.	⊖		⊖	●	mm		
26964	4,0	25	0,8	4.0	81	34	10
26965	5,5	25	1,0	5.5	81	34	10
26966	6,5	25	1,2	6.5	81	34	10
26967	8,0	25	1,2	8.0	81	34	10

Phillips with short round blade, Stubby

311

Order-No.	⊕		●	mm		
26968	PH1	25	4,5	81	34	10
26969	PH2	25	6,0	81	34	10
26970	PH3	25	8,0	81	34	10

Pozidriv with short round blade, Stubby

313

Order-No.	⊕		●	mm		
26971	PZ1	25	4,5	81	34	10
26972	PZ2	25	6,0	81	34	10
26973	PZ3	25	8,0	81	34	10

Screwdriver SoftFinish®

Slotted with hexagonal blade and hexagon head

308

Order-No.	⊖		⊖	⬢	⬡	mm	
00731	3,5	75	0,6	4.0	-	186	10
00732	4,5•	90	0,8	4.0	-	201	10
00733	5,5	100	1,0	5.0	8	213	10
00734	6,5	125	1,2	6.0	10	238	10
00735	7,0•	125	1,1	6.0	10	238	10
00736	8,0	150	1,2	8.0	13	268	10
00737	9,0•	150	1,4	8.0	13	268	10
00738	10,0	175	1,6	8.0	13	293	10
00739	12,0	200	2,0	10.0	16	318	10
00740	14,0•	250	2,5	10.0	16	368	10

• Additional dimension. Non-DIN size.

Phillips with hexagonal blade and hexagon head

312

Order-No.	⊕		⬢	⬡	mm		
00764	PH1	80	5,0	8	186	30	10
00765	PH2	100	6,0	10	213	36	10
00766	PH3	150	8,0	13	268	41	10
00767	PH4	200	10,0	16	318	41	10

Pozidriv with hexagonal blade and hexagon head

314

Order-No.	⊕		⬢	⬡	mm		
00776	PZ1	80	5,0	8	186	30	10
00777	PZ2	100	6,0	10	213	36	10
00778	PZ3	150	8,0	13	268	41	10
00779	PZ4	200	10,0	16	318	41	10

Square reamer

■ with square tip and plastic handle

300-2

Order-No.	■		mm		
00679	6,0	100	185	34	10

Awl plastic handle

● with round tip and plastic handle

301-2

Order-No.	●		mm		
00683	6,0	100	185	34	10

Fine screwdriver PicoFinish

Slotted

260P

Order-No.	⊖	↔	↕	mm		
42381	0,8	40	2	134	9	10
42382	1,0	40	2	134	9	10
42383	1,2	40	2	134	9	10
42384	1,5	40	2	134	9	10
42385	1,5	60	2	154	9	10
42386	1,8	40	2	134	9	10
42387	1,8	60	2	154	9	10
42388	2,0	40	2	140	18	10
42389	2,0	60	2	160	18	10
42390	2,0	100	2	200	18	10
42391	2,5	50	2,5	150	18	10
42392	2,5	75	2,5	175	18	10
42393	2,5	100	2,5	200	18	10
42394	3,0	50	3	150	18	10
42395	3,0	100	3	200	18	10
42397	3,5	60	3,5	160	18	10
42398	4,0	60	4	160	18	10
42399	4,0	100	4	200	18	10

Phillips

261P

Order-No.	⊕	↔	↕	mm		
42403	PH000	40	2	134	9	10
42402	PH00	40	2	134	9	10
42413	PH00	60	2	154	9	10
42401	PH0	50	3	150	18	10
42414	PH0	75	3	175	18	10
42415	PH1	60	4	160	18	10
42416	PH1	80	4	180	18	10

Pozidriv

262P

Order-No.	⊕	↔	↕	mm		
42418	PZ0	50	3	150	18	10
42419	PZ1	60	4	160	18	10

TORX® MagicSpring®

267PR

Order-No.	✱	↔	↕	mm		
42501	T6	40	2,5	140	18	10
42502	T7	40	2,5	140	18	10
42503	T8	40	2,5	140	18	10
42504	T9	50	3	150	18	10
42505	T10	50	3	150	18	10
42506	T15	60	3,5	150	18	10

TORX®

267P

Order-No.	✱	↔	↕	mm		
42474	T1	40	2,5	134	9	10
42475	T2	40	2,5	134	9	10
42476	T3	40	2,5	134	9	10
42477	T4	40	2,5	134	9	10
42478	T5	40	2,5	134	9	10
42479	T6	40	2,5	140	18	10
42480	T7	40	2,5	140	18	10
42481	T8	40	2,5	140	18	10
42482	T9	50	3	150	18	10
42483	T10	50	3	150	18	10
42484	T15	60	3,5	160	18	10
42485	T20	60	4	160	18	10

TORX PLUS®

267PIP

Order-No.	✱	↔	↕	mm		
42486	4IP	40	2,5	134	9	10
42487	5IP	40	2,5	134	9	10
42488	6IP	40	2,5	140	18	10
42489	7IP	40	2,5	140	18	10
42490	8IP	40	2,5	140	18	10
42491	9IP	50	3	150	18	10
42492	10IP	50	3	150	18	10
42493	15IP	60	3,5	160	18	10
42494	20IP	60	4	160	18	10

Pentalobe

266P

Order-No.	✱	↔	↕	mm		
42464	PL1	40	2,5	134	9	10
42465	PL2	40	2,5	134	9	10
42466	PL3	40	2,5	134	9	10
42467	PL4	40	2,5	134	9	10
42468	PL5	40	2,5	134	9	10
42469	PL6	40	2,5	140	18	10

Y-type

266PY

Order-No.	✱	↔	↕	mm		
42470	0	40	2	134	9	10

Which drives are used for each individual product? Page 304

Ball end hex

264P

Order-No.	◉		mm		
42431	1,3 (0,05")	40	134	9	10
42432	1,5	50	150	18	10
42433	2,0	50	150	18	10
42434	2,5	60	160	18	10
42435	3,0	60	160	18	10

Hex

263P

Order-No.	◉		mm		
42421	0,9 (0,035")	40	134	9	1
42422	1,3 (0,05")	40	134	9	1
42423	1,5	50	144	9	1
42424	2,0 (5/64")	50	150	18	1
42425	2,5	60	160	18	1
42426	3	60	160	18	1

Hexagonal ball end, inch design

264P Zoll

Order-No.	◉		mm		
42436	1/16"	50	150	18	10
42440	5/64"	50	150	18	10
42438	3/32"	50	150	18	10
42441	7/64"	60	160	18	10
42437	1/8"	60	160	18	10
42442	9/64"	60	160	18	10
42439	5/32"	60	160	18	10

PicoFinish® fine screwdriver

Hex nut driver

265P

Order-No.	◉		mm		
42443	1,5	60	160	18	10
42444	1,8	60	160	18	10
42445	2	60	160	18	10
42446	2,5	60	160	18	10
42447	3,0	60	160	18	10
42449	3,5	60	160	18	10
42450	4,0	60	160	18	10
42451	4,5	60	160	18	10
42452	5	60	160	18	10
42453	5,5	60	160	18	10
42454	6	60	160	18	10
42455	7	60	160	18	10

Hexagon nut driver, inch design

265P Zoll

Order-No.	◉		mm		
42459	3/32"	60	160	18	10
42462	7/64"	60	160	18	10
42457	1/8"	60	160	18	10
42463	9/64"	60	160	18	10
42460	5/32"	60	160	18	10
42458	3/16"	60	160	18	10
42461	7/32	60	160	18	10
42456	1/4"	60	160	18	10

Lifter PicoFinish

268P

Order-No.		●	mm				
42507	50	3,5	150	18	1	3,5	10

INFOBOX:

Pentalobe

The security profile for Apple devices.

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

Small screwdriver

Slotted transparent-red, with push-on clip — **500**

Order-No.	⊖		●	mm		
01537	3,0	40	3,0	100	11	50
01538	3,0	60	3,0	120	11	50
01539	3,0	80	3,0	140	11	50

Small screwdriver

Slotted transparent-yellow — **509**

Order-No.	⊖		●	mm		
01548	2,0	40	2,0	85	8	50

Universal scraper SoftFinish®

430 40

Order-No.	
23159	5

Universal scraper set SoftFinish®

10-pcs. in blister pack — **SB 430 4010**

Order-No.	
26920	1

Replacement blade set 20 mm wide

10-pcs. for universal scraper in blister pack — **SB 430 40 K1020**

Order-No.	
27902	5

Replacement blade set 13 mm wide

10-pcs. for universal scraper in blister pack — **SB 430 40 K10**

Order-No.	
27606	5

Magnetiser

400 10

Order-No.	
01508	5

in blister pack — **SB 400 10**

Order-No.	
02568	5

Which drives are used for each individual product? Page 304

Screwdriver MicroFinish®

Slotted, Phillips 6-pcs. — 5520 HK6

Order-No.	
29124	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PH1 x 80 / PH2 x 100

Slotted, Pozidriv 6-pcs. — 5520 ZK6

Order-No.	
29125	1
⊖	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
⊕	PZ1 x 80 / PZ2 x 100

TORX® 6-pcs. — 5527 K6

Order-No.	
29169	1
✱	T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115 / T40 x 130

Screwdriver MicroFinish®

Slotted, Phillips with one-piece hexagonal blade and solid steel cap, 5-pcs. — 5533 HK5

Order-No.	
29138	1
⊖	5,5 x 100 / 6,5 x 125 / 8,0 x 150
⊕	PH1 x 80 / PH2 x 100

Slotted, Pozidriv with one-piece hexagonal blade and solid steel cap, 5-pcs. — 5533 ZK5

Order-No.	
29139	1
⊖	5,5 x 100 / 6,5 x 125 / 8,0 x 150
✱	PZ1 x 80 / PZ2 x 100

Screwdriver MicroFinish®

⊖ Slotted with round blade — 5520

Order-No.	⊖				mm		
29115	3,5	100	0,6	3.5	204	23	10
29116	4,0	100	0,8	4.0	211	30	10
29117	4,0•	150	0,8	4.0	261	30	10
29118	5,5	125	1,0	5.5	236	30	10
29119	5,5	150	1,0	5.5	261	30	10
29120	6,5	150	1,2	6.0	268	36	10
29121	8,0	150	1,2	7.0	274	41	10
29122	8,0	175	1,2	7.0	299	41	10
29123	10,0•	200	1,6	8.0	324	41	5

• Additional dimension. Non-DIN size.
DIN 5265, ISO 2380.

⊕ Phillips with round blade — 5521

Order-No.	⊕			mm		
29140	PH0	60	3,0	165	23	10
29141	PH1	80	4,5	192	30	10
29142	PH1•	200	4,5	312	30	5
29143	PH2	100	6,0	220	36	10
29144	PH2•	200	6,0	320	36	5
29145	PH3•	150	8,0	277	41	10

• Additional dimension. Non-DIN size.
DIN ISO 8764-PH.

INFOBOX:

Wiha MicroFinish screwdriver

The specialist for wet and oily applications.

- Due to the micro-fine surface structure of the screwdriver handle, the user can gain an optimal hold, even with oily or wet hands.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Pozidriv with round blade

5522

Order-No.				mm		
29152	PZ1	80	4,5	192	30	10
29153	PZ2	100	6,0	220	36	10
29154	PZ3	150	8,0	277	41	10

DIN ISO 8764-PZ.

TORX® with round blade

5527

Order-No.				mm		
29161	T9	60	4,0	172	30	10
29162	T10	80	4,0	192	30	10
29163	T15	80	4,0	192	30	10
29164	T20	100	4,0	212	30	10
29165	T25	100	4,5	212	30	10
29166	T27	115	5,5	235	36	10
29167	T30	115	6,0	235	36	10
29168	T40	130	7,0	257	41	5

Hexagon nut driver with round blade

5525

Order-No.			mm			
29170	5,5	125	237	30	7,9	10
29171	6	125	237	30	8,9	10
29172	7	125	245	36	10,9	10
29173	8	125	245	36	11,9	10
29174	10	125	245	36	14,4	10

Screwdriver MicroFinish®

Hexagon nut driver with flexible shaft

5528

Order-No.			mm			
29175	6	150	262	30	9	10
29176	7	150	270	36	11	10
29177	8	150	270	36	12	10

Screwdriver MicroFinish®

Slotted with one-piece hexagonal blade and solid steel cap

5533

Order-No.						mm	
29133	4,5•	90	0,8	4.0	-	201	10
29134	5,5	100	1,0	5.0	8	213	10
29135	6,5	125	1,2	6.0	10	238	10
29136	8,0	150	1,2	8.0	13	271	10
29137	10,0•	175	1,6	8.0	13	296	5

• Additional dimension. Non-DIN size.
DIN 5265, ISO 2380.

Phillips with one-piece hexagonal blade and solid steel cap

5534

Order-No.					mm		
29149	PH1	80	5,0	8	187	30	10
29150	PH2	100	6,0	10	214	36	10
29151	PH3	150	8,0	13	271	41	10

DIN ISO 8764-PH.

Pozidriv with one-piece hexagonal blade and solid steel cap

5535

Order-No.					mm		
29158	PZ1	80	5,0	8	187	30	10
29159	PZ2	100	6,0	10	214	36	10
29160	PZ3	150	8,0	13	271	41	5

DIN ISO 8764-PZ.

Screw extractor set

Hexagon with spiral drill bit 8-pcs.

405 11

Order-No.	
03988	10
2,0 / 2,5 / 3,0 / 4 / 5 / 6 / 8 / 10	

Which drives are used for each individual product? Page 304

Screw extractor

405

Order-No.		mm		
03847	2,0	85	6,0	10
03848	2,5	85	6,0	10
03849	3,0	85	6,0	10
03850	4	85	6,0	10
03851	5	85	6,0	10
03852	6	95	8,0	10
03853	8	95	10,0	10
03854	10	110	12,0	10

Screwdriver set SoftFinish® ESD

Slotted, Phillips 5-pcs.

302ESD HK5 01

Order-No.	
27252	1
3,0 x 100 / 4,0 x 100	
PH0 x 60 / PH1 x 80 / PH2 x 100	

IEC 61340-5-1.

TORX® 5-pcs.

362ESD K5

Order-No.	
27253	1
T6 x 60 / T8 x 60 / T9 x 60 / T10 x 80 / T15 x 80	

IEC 61340-5-1.

Screwdriver set Precision ESD

Slotted, Phillips 6-pcs.

272 K6

Order-No.	
08463	1
1,5 x 40 / 2,0 x 40 / 2,5 x 50 / 3,0 x 50	
PH00 x 40 / PH0 x 50	

IEC 61340-5-1.

TORX® 6-pcs.

278 K6

Order-No.	
26919	1
T5 x 40 / T6 x 40 / T7 x 40 / T8 x 40 / T10 x 50 / T15 x 60	

IEC 61340-5-1.

Hexagon 6-pcs.

275 K6

Order-No.	
32278	1
0,9 x 40 / 1,3 x 40 / 1,5 x 50 / 2 x 50 / 2,5 x 60 / 3 x 60	

IEC 61340-5-1.

Hexagon nut driver 6-pcs.

277 K6

Order-No.	
32279	1
2,5 x 60 / 3 x 60 / 3,5 x 60 / 4 x 60 / 5 x 60 / 5,5 x 60	

IEC 61340-5-1.

INFOBOX:

Electrostatic conductive ESD tools



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Screwdriver SoftFinish® ESD

Slotted

302ESD

Order-No.	⊖		⊖	●	mm		
08179	2,5	75	0,4	2.5	179	23	10
27150	3,0	100	0,5	3.0	204	23	10
27151	4,0	100	0,8	4.0	211	30	10
08182	5,5	125	1,0	5.5	236	30	10
08183	6,5	150	1,2	6.0	268	36	10

IEC 61340-5-1.

Phillips

311ESD

Order-No.	⊕		●	mm		
08184	PH0	60	3,0	164	23	10
08185	PH1	80	4,5	191	30	10
08186	PH2	100	6,0	218	36	10

IEC 61340-5-1.

Pozidriv

313ESD

Order-No.	⊕		●	mm		
26928	PZ0	60	3,0	164	23	10
26929	PZ1	80	4,5	191	30	10

IEC 61340-5-1.

TORX®

362ESD

Order-No.	✱		●	mm		
31432	T3	60	2,5	164	23	10
27148	T4	60	2,5	164	23	10
27641	T5	60	3,5	164	23	10
27149	T6	60	3,5	164	23	10
31901	T7	60	3,5	164	23	10
22436	T8	60	3,5	164	23	10
27145	T9	60	4,0	171	30	10
27144	T10	80	4,0	191	30	10
27146	T15	80	4,0	191	30	10
27147	T20	100	4,0	218	36	10

IEC 61340-5-1.

Screwdriver SoftFinish® ESD

Slotted Stubby

302ESD

Order-No.	⊖		⊖	●	mm		
32151	4,0	25	0,8	4.0	81	34	10
32152	5,5	25	1,0	5.5	81	34	10
32153	6,5	25	1,2	6.5	81	34	10

IEC 61340-5-1.

Phillips Stubby

311ESD

Order-No.	⊕		●	mm		
32154	PH1	25	4,5	81	34	10
32155	PH2	25	6,0	81	34	10

IEC 61340-5-1.

Pozidriv Stubby

313ESD

Order-No.	⊕		●	mm		
32156	PZ1	25	4,5	81	34	10
32157	PZ2	25	6,0	81	34	10

IEC 61340-5-1.

Precision ESD lifter

279-10

Order-No.			mm		
07667	3,5	50	145	13,0	5

IEC 61340-5-1.

Which drives are used for each individual product? Page 304

Slotted

272

Order-No.	⊖		⊖	●	mm		
07634	1,5	40	0,25	2.0	120	12,5	10
07635	2,0	40	0,40	2.0	120	12,5	10
07636	2,5	50	0,40	2.5	145	13,0	10
07637	3,0	50	0,50	3.0	145	13,0	10
07638	3,5	60	0,60	3.5	170	14,0	10
07639	4,0	60	0,80	4.0	170	14,0	10

IEC 61340-5-1.

Phillips

273

Order-No.	⊕		●	mm		
28053	PH000	40	2,0	120	12,5	10
07640	PH00	40	2,0	120	12,5	10
07641	PH0	50	3,0	145	13,0	10
07642	PH1	60	4,0	170	14,0	10

IEC 61340-5-1.

Pozidriv

274

Order-No.	⊕		●	mm		
07643	PZ1	60	4,0	170	14	10

IEC 61340-5-1.

TORX® MagicSpring®

278R

Order-No.			●	mm		
27748	T6	40	2,5	120	12,5	10
27749	T7	40	2,5	120	12,5	10
27759	T8	40	2,5	120	12,5	10
27750	T9	50	3,0	145	13,0	10
27751	T10	50	3,0	145	13,0	10
27752	T15	60	3,5	170	14,0	10

IEC 61340-5-1.

TORX®

278

Order-No.			●	mm		
25676	T1	40	2,5	120	12,5	10
25677	T2	40	2,5	120	12,5	10
21256	T3	40	2,5	120	12,5	10
21255	T4	40	2,5	120	12,5	10
07659	T5	40	2,5	120	12,5	10
07660	T6	40	2,5	120	12,5	10
07661	T7	40	2,5	120	12,5	10
07662	T8	40	2,5	120	12,5	10
07663	T9	50	3,0	145	13,0	10
07664	T10	50	3,0	145	13,0	10
07665	T15	60	3,5	170	14,0	10
07666	T20	60	4,0	170	14,0	10

IEC 61340-5-1.

TORX PLUS®

278IP

Order-No.			●	mm		
28198	4IP	40	2,5	120	12,5	10
27761	5IP	40	2,5	120	12,5	10
27762	6IP	40	2,5	120	12,5	10
27763	7IP	40	2,5	120	12,5	10
27764	8IP	40	2,5	120	12,5	10
27765	9IP	50	3,0	145	13,0	10
27766	10IP	50	3,0	145	13,0	10
27767	15IP	60	3,5	170	14,0	10

IEC 61340-5-1.

Ball end hex

276

Order-No.			mm		
07649	1,5	50	145	13.0	10
07650	2	50	145	13.0	10
07651	2,5	60	170	14.0	10
07652	3	60	170	14.0	10

IEC 61340-5-1.

Hex

275

Order-No.			mm		
27707	0,7	40	120	12.5	10
27708	0,9	40	120	12.5	10
07644	1,3	40	120	12.5	10
07645	1,5	50	145	13.0	10
07646	2	50	145	13.0	10
07647	2,5	60	170	14.0	10
07648	3	60	170	14.0	10
32315	4	60	170	14.0	10

IEC 61340-5-1.

Hex nut driver

277

Order-No.					mm		
32312	1,5	60	2,5	-	155	13,0	10
32313	2,0	60	2,9	-	155	13,0	10
07653	2,5	60	4,0	4.0	155	13,0	10
07654	3	60	5,0	5.0	155	13,0	10
07655	3,5	60	5,3	6.0	155	13,0	10
07656	4	60	5,5	6.0	155	13,0	10
32314	4,5	60	6,2	7.0	155	13,0	10
07657	5	60	6,8	7.0	155	13,0	10
07658	5,5	60	7,6	8.0	170	14,0	10

IEC 61340-5-1.

Torque screwdriver
Controlled power for greater security.

The correct torque prevents damage to materials, eliminates the need for retouching and protects against warranty claims. This makes fully certified Wiha torque tools essential for mechanics, electricians and electronics technicians as they combine precision with security: with a release accuracy of +/–6 % for the pre-set scale value, Wiha torque screwdrivers satisfy standard precision requirements.

Torque tools with fixed settings increase process reliability while tools with variable settings are particularly ideal for mobile use. A special interchangeable blade system offers interchangeable blades with different drives. Guaranteed individual item testing using the manufacturer's inspection process and individual item marking with an identification number attest to the high quality and manufacturing standard of the tools.

Application

Torque screwdriver

For applications in electrics

Torque screwdriver set TorqueVario®-S electric assorted, variably adjustable torque limit, 18-pcs. in bag
Page 162

Torque screwdriver TorqueVario®-S electric Variable torque limit settings
Page 163

easyTorque electric torque adapter
Page 164

Torque screwdriver with T-handle TorqueVario®-S T electric Variable torque limit settings
Page 165

For applications in mechanics

Torque screwdriver iTorque® with digital scale
Page 168

Torque screwdriver set TorqueVario®-S assorted variably adjustable, 13-pcs. in box
Page 168

Torque screwdriver TorqueVario®-S Variable torque limit settings
Page 168

Torque screwdriver TorqueFix® permanently pre-set torque limit
Page 169

Torque screwdriver with T-handle set TorqueVario®-S T assorted, variably adjustable torque limit, 11-pcs. in box
Page 172

Torque screwdriver with T-handle TorqueVario®-S T Variable torque limit settings
Page 172

For applications in electronics

Torque screwdriver set TorqueVario®-S ESD assorted, variably adjustable torque limit, 13-pcs. in box
Page 175

Torque screwdriver TorqueVario®-S ESD Variable torque limit settings
Page 175

Torque screwdriver set TorqueVario®-S electric

assorted, variably adjustable torque limit, 18-pcs. in bag

2872 T18

Order-No.	
36791	1
○	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, Tool tested at 10,000 V AC / 0,8 - 5,0 Nm
	1 x Adjusting tool for torque screwdriver with long handle
○	1 x slimBit bit holder electric, locked mechanically For VDE torque screwdriver with long handle
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
⊕	1 x PH1 / 1 x PH2
⊕	1 x PZ1 / 1 x PZ2
⊕	1 x SL/PZ1 / 1 x SL/PZ2
✱	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Which product is available with which drive? Page 304

Torque screwdriver set TorqueVario®-S electric

assorted, variably adjustable torque limit, 13-pcs. in bag

2872 T13

Order-No.	
40674	1
○	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, Tool tested at 10,000 V AC / 0,8 - 5,0 Nm
	1 x Adjusting tool for torque screwdriver with long handle
○	1 x Screwdriver with bit holder SoftFinish® electric slimVario For slimBits, Tool tested at 10,000 V AC
○	1 x slimBit bit holder electric, locked mechanically For VDE torque screwdriver with long handle
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5
⊕	1 x PH1 / 1 x PH2
✱	1 x PZ1 / 1 x PZ2
✱	1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Torque screwdriver set TorqueVario®-S electric

PlusMinus/Pozidriv variably settable torque limit 5-pcs.

2872 S3

Order-No.	
38074	1
○	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, Tool tested at 10,000 V AC / 0,8 - 5,0 Nm
○	1 x slimBit bit holder electric, locked mechanically For VDE torque screwdriver with long handle
	1 x Adjusting tool for torque screwdriver with long handle
✱	1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S electric

○ Variable torque limit settings

2872

Order-No.	Nm	±%	○	⇄	⇕	
26625	0,5-2,0	6 %	3,8	131	30	1
26626	0,8-5,0	6 %	3,8	138	36	1
26627	2,0-7,0	6 %	3,8	142	41	1

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

easyTorque torque set electric adapter

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 080 S4

Order-No.		
41476		1
	1 x 0,8 Nm	
	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x SoftFinish® electric screwdriver handle	

Manufactured acc. to IEC 60900.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 200 S4

Order-No.		
41477		1
	1 x 2,0 Nm	
	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x SoftFinish® electric screwdriver handle	

Manufactured acc. to IEC 60900.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701 280 S4

Order-No.		
41478		1
	1 x 2,8 Nm	
	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x SoftFinish® electric screwdriver handle	

Manufactured acc. to IEC 60900.

easyTorque torque set electric adapter

for slimBits and slimVario® holder, 5-pcs. in blister pack **29701 S5**

Order-No.		
41479		1
	1 x 0,8 Nm / 1 x 2,0 Nm / 1 x 2,5 Nm / 1 x 2,8 Nm / 1 x 4,0 Nm	

Manufactured acc. to IEC 60900.

easyTorque electric torque adapter

for slimBits and slimVario® holder in blister **2970**

Order-No.	Nm	±%	mm		
41341	0,8	10 %	59	5,5	1
41342	2,0	10 %	59	5,5	1
41343	2,5	10 %	59	5,5	1
41344	2,8	10 %	59	5,5	1
41345	4,0	10 %	59	5,5	1

Manufactured acc. to IEC 60900.

Which product is available with which drive? Page 304

Torque screwdriver with T-handle TorqueVario®-S T electric

Variable torque limit settings

2933

Order-No.	Nm	±%				
43177	5-14	6	6	56	120	1

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Adjusting tool

for torque screwdriver with T-handle

2899

Order-No.		mm	
28691	90	146	1

INFOBOX:

Torque T-handle TorqueVario®-S T electric

Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades

Interchangeable electric blade

TORX® for torque screwdriver with T-handle electric

283795

Order-No.		mm		max. Nm	
38931	T15	136	35	5,5	10
38932	T20	136	35	10	10
38933	T25	136	35	15	10
38934	T27	136	35	15	10
38935	T30	136	35	20	10
38936	T40	136	35	20	10

Manufactured acc. to IEC 60900.

Interchangeable electric blade

Hex for torque screwdriver with T-handle electric

283793

Order-No.		mm		max. Nm	
38918	3,0	136	35	5,5	10
38919	4,0	136	35	15	10
38920	5,0	136	35	20	10
38921	6,0	136	35	20	10

Manufactured acc. to IEC 60900.

Interchangeable electric blade

Hex nut driver for torque screwdriver with T-handle electric

283794

Order-No.		mm	max. Nm	
38925	7,0	136	5	10
38926	8,0	136	10	10
38927	9,0	136	14	10
38928	10,0	136	17	10
38929	13,0	136	20	10
38930	17,0	136	20	10

Manufactured acc. to IEC 60900.

slimBit electric bit set

assorted with slimBit holder, 7-pcs. **2879 B7**

Order-No.	
36079	1
○	1 x slimBit bit holder electric, locked mechanically For VDE torque screwdriver with long handle
⊖	1 x 4,0 / 1 x 5,5
⊕	1 x PH1 / 1 x PH2
✠	1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

slimBit bit holder electric, locked mechanically

○ For VDE torque screwdriver with long handle **28799**

Order-No.	○	⬢	mm		
35870	6	3,8	170	13	10

Manufactured acc. to IEC 60900.

Nut driver adapter blade electric 1/4”

For VDE torque screwdriver with long handle **28799**

Order-No.		⬢	mm		
43128	1/4	3,8	178	12	10

Manufactured acc. to IEC 60900.

slimBit electric bit set

TORX®, 6-pcs. in box **2831-B604**

Order-No.	
42210	6
✱	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, 6-pcs. in box **2831-B605**

Order-No.	
42211	6
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
✠	1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Slotted, Phillips, 6-pcs. in box **2831-B606**

Order-No.	
42212	6
⊖	1 x 6,5 / 1 x 2,5 / 1 x 5,5 / 1 x 3,5
⊕	1 x PH1 / 1 x PH2

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv, 6-pcs. in box **2831-B607**

Order-No.	
42213	6
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
✠	1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in box **2831-B608**

Order-No.	
42214	6
◉	1 x 2 / 1 x 2,5 / 1 x 3 / 1 x 4 / 1 x 5 / 1 x 6

Manufactured acc. to IEC 60900.

Which product is available with which drive? Page 304

Slotted

2831-10

Order-No.	⊖	mm	⊖↕	◉↕	max. Nm	
34578	2,5•	75	0,4	6.0	0,4	5
34579	3,0•	75	0,5	6.0	0,6	5
41159	3,5	75	0,6	6.0	2,5	5
34580	4,0	75	0,8	6.0	2,5	5
34581	5,5	75	1,0	6.0	5,5	5
34582	6,5	75	1,2	6.0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Phillips

2831-11

Order-No.	⊕	mm	◉↕	max. Nm	
34583	PH1	75	6,0	3.8	5
34584	PH2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

Pozidriv

2831-12

Order-No.	⊕	mm	◉↕	max. Nm	
34585	PZ1	75	6,0	3.8	5
34586	PZ2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

2831-13

Order-No.	⊕	mm	◉↕	max. Nm	
34587	SL/PH1	75	6,0	3.8	5
34588	SL/PH2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

2831-14

Order-No.	⊕	mm	◉↕	max. Nm	
34589	SL/PZ1	75	6,0	3.8	5
34590	SL/PZ2	75	6,0	5.5	5

Manufactured acc. to IEC 60900.

TORX®

2831-15

Order-No.	✱	mm	◉↕	max. Nm	
35506	T8•	75	6,0	1.3	5
41160	T9•	75	6,0	1.3	5
35507	T10•	75	6,0	3.8	5
35508	T15	75	6,0	5.0	5
35509	T20	75	6,0	5.5	5
36071	T25	75	6,0	5.5	5

• no slim version
Manufactured acc. to IEC 60900.

Hex

2831-18

Order-No.	◉	mm	◉↕	max. Nm	
37222	1,5•	75	6,0	0.9	5
37223	2•	75	6,0	1.8	5
37224	2,5	75	6,0	3.8	5
37147	3	75	6,0	5.5	5
37225	4	75	6,0	5.5	5
37226	5	75	6,0	5.5	5
37227	6	75	6,0	5.5	5

• no slim version
Manufactured acc. to IEC 60900.

Square

2831-17

Order-No.	▣	▣	mm	◉↕	max. Nm	
35510	#1	2,3	75	6.0	5,5	5
35511	#2	2,8	75	6.0	5,5	5

Manufactured acc. to IEC 60900.

INFOBOX:
slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Torque screwdriver iTorque®

with digital scale

28352

Order-No.	Nm		±%				
36886	0,4-1,5	60-210 in.oz	6%	4	134	34	1
36887	0,8-3,0	7-26 in.lbs	6%	4	134	34	1
36888	1,0-5,0	9-44 in.lbs	6%	4	134	40	1

DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S

Variable torque limit settings

2852

Order-No.	Nm	±%				
36849	0,04-0,46•	10%	4	127	23	1
26888	0,1-0,6	10%	4	127	23	1
36850	0,1-0,6	6%	4	127	23	1
26461	0,4-1,0	6%	4	127	23	1
26462	0,5-2,0	6%	4	131	30	1
26463	0,8-5,0	6%	4	138	36	1
26464	2,0-7,0	6%	4	142	41	1

• Precision in range of 0.1-0.46 Nm. DIN EN ISO 6789.

INFOBOX:
iTorque

The intelligent torque tool.

- Required torque can be adjusted and set on the handle without the need for a separate tool.
- Large numerical display simplifies reading.
- ClickControl records every use and optimises the monitoring of measuring instruments.
- Calibration alarm after 5,000 applications for absolute process safety.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.
- Units can be switched (Nm » in.lb/ cNm » in.oz)
- Can be recalibrated

Torque screwdriver set TorqueVario®-S

assorted variably adjustable, 13-pcs. in box

2852 S10

Order-No.	
26893	1
○	Torque screwdriver TorqueVario®-S Variable torque limit settings 0,8 - 5,0 Nm
○	Bit holder clamping with ball for torque screwdriver with long handle
	Adjusting tool for torque screwdriver with long handle
	PH1 x 25 / PH2 x 25
	PZ1 x 25 / PZ2 x 25
	T10 x 25 / T15 x 25 / T20 x 25 / T25 x 25
	3,0 x 25 / 4,0 x 25

DIN EN ISO 6789.

TORX®, TORX PLUS® with variably adjustable torque limit, 13-pcs. in box

2852 S10-01

Order-No.	
34614	1
○	Torque screwdriver TorqueVario®-S Variable torque limit settings 0,8 - 5,0 Nm
○	Bit holder clamping with ball for torque screwdriver with long handle
	Adjusting tool for torque screwdriver with long handle
	T7 x 25 / T8 x 25 / T9 x 25 / T10 x 25 / T15 x 25
	7IP x 25 / 8IP x 25 / 9IP x 25 / 10IP x 25 / 15IP x 25

DIN EN ISO 6789.

Which product is available with which drive? Page 304

Torque screwdriver TorqueFix®

permanently pre-set torque limit 2850

Order-No.	Nm	±%				
26925	0,4	6%	4	112	23	1
26127	0,5	6%	4	112	23	1
26047	0,6	6%	4	112	23	1
26327	0,8	6%	4	112	23	1
26048	0,9	6%	4	112	23	1
26133	1,1	6%	4	119	30	1
26049	1,2	6%	4	119	30	1
26901	1,5	6%	4	119	30	1
26051	2,0	6%	4	119	30	1
26128	2,5	6%	4	119	36	1
26052	3,0	6%	4	126	36	1
26129	3,8	6%	4	126	36	1
26053	5,0	6%	4	132	41	1
26130	5,5	6%	4	132	41	1
34533	6,0	6%	4	132	41	1
26131	7,2	6%	4	132	41	1

DIN EN ISO 6789.

Torque screwdriver set TorqueFix®

Cable key for circular plug connector permanently pre-set torque limit 2-pcs. 2850

Order-No.	Nm		mm				
36846	0,4	9	230	78	112	23	1
36847	0,6	13	230	78	112	23	1

DIN EN ISO 6789.

Torque screwdriver easyTorque

permanently pre-set torque limit 2920

Order-No.	Nm	±%				
36229	0,5	10%	4	130	34	1
36230	0,6	10%	4	130	34	1
36240	0,9	10%	4	130	34	1
36231	1,1	10%	4	130	34	1
36233	1,2	10%	4	130	34	1
36234	1,4	10%	4	130	34	1
36235	2,0	10%	4	130	34	1
36236	2,5	10%	4	130	34	1
36237	3,0	10%	4	130	34	1
36238	3,8	10%	4	130	34	1
36320	4,0	10%	4	130	34	1
36321	4,5	10%	4	130	34	1
36239	5,0	10%	4	130	34	1

INFOBOX:
TorqueVario®-S

Variably settable torque tools.

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the torque setter adjusting tool.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.

INFOBOX:
TorqueFix®

Permanently pre-set torque tools.

- For controlled fastening, e.g. in series production or repetitive usage.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Broad selection of interchangeable blades and adapter blades.

Slotted for torque screwdriver with long handle

28590

Order-No.	⊖	⊖	⬣	mm	↔	max. Nm	
26227	0,25	1,5	4	175	42	0,15	10
26228	0,4	2,0	4	175	42	0,4	10
26151	0,4	2,5	4	175	42	0,4	10
26277	0,5	3,0	4	175	42	0,6	10
26278	0,6	3,5	4	175	42	1,1	10
26279	0,8	4,0	4	175	42	2,5	10

Blade tip DIN ISO 2380-1.

Phillips for torque screwdriver with long handle

28591

Order-No.	⊕	⬣	mm	↔	max. Nm	
26199	PH000	4	175	42	0,4	10
26196	PH00	4	175	42	0,4	10
26197	PH0	4	175	42	0,9	10
26058	PH1	4	175	42	3,8	10
27079	PH2	4	175	42	5,5	10

Blade tip DIN ISO 8764-1.

Pozidriv for torque screwdriver with long handle

28592

Order-No.	⊕	⬣	mm	↔	max. Nm	
26198	PZ0	4	175	42	0,9	10
26148	PZ1	4	175	42	3,8	10
26889	PZ2	4	175	42	5,5	10

Blade tip DIN ISO 8764-1.

TORX® MagicSpring® for torque screwdriver with long handle

28595R

Order-No.	✱	⬣	mm	↔	max. Nm	
27818	T6	4	175	42	0,6	10
27812	T7	4	175	42	0,9	10
27813	T8	4	175	42	1,3	10
27814	T9	4	175	42	2,5	10
27815	T10	4	175	42	3,8	10
27816	T15	4	175	42	5,5	10
27817	T20	4	175	42	8,0	10
29467	T25	4	175	42	8,0	10

TORX® for torque screwdriver with long handle

28595

Order-No.	✱	⬣	mm	↔	max. Nm	
30852	T4	4	175	42	0,25	10
26158	T5	4	175	42	0,4	10
26064	T6	4	175	42	0,6	10
26065	T7	4	175	42	0,9	10
26066	T8	4	175	42	1,3	10
26059	T9	4	175	42	2,5	10
26067	T10	4	175	42	3,8	10
26068	T15	4	175	42	5,5	10
26069	T20	4	175	42	8,0	10
26070	T25	4	175	42	8,0	10

TORX PLUS® MagicSpring® for torque screwdriver with long handle

28596R

Order-No.	✱	⬣	mm	↔	max. Nm	
29553	6IP	4	175	42	0,8	10
29554	7IP	4	175	42	1,3	10
29555	8IP	4	175	42	2,0	10
29556	9IP	4	175	42	3,0	10
29557	10IP	4	175	42	4,5	10
29558	15IP	4	175	42	6,6	10
29559	20IP	4	175	42	8,0	10
29560	25IP	4	175	42	8,0	10

TORX PLUS® for torque screwdriver with long handle

28596

Order-No.	✱	⬣	mm	↔	max. Nm	
26159	5IP	4	175	42	0,5	10
26071	6IP	4	175	42	0,8	10
26152	7IP	4	175	42	1,3	10
26072	8IP	4	175	42	2,0	10
26154	9IP	4	175	42	3,0	10
26155	10IP	4	175	42	4,5	10
26073	15IP	4	175	42	6,6	10
26156	20IP	4	175	42	8,0	10
26157	25IP	4	175	42	8,0	10

Which product is available with which drive? Page 304

Hexagonal ball end for torque screwdriver with long handle

28597

Order-No.	◉	⬣	mm	⟷	max. Nm	
26221	1,5	4	175	42	0,4	10
26222	2,0	4	175	42	0,9	10
26223	2,5	4	175	42	2,0	10
26224	3,0	4	175	42	3,8	10
26225	4,0	4	175	42	8,0	10

Hexagon for torque screwdriver with long handle

28593

Order-No.	◉	⬣	mm	⟷	max. Nm	
26544	1,3	4	175	42	0,4	10
26200	1,5	4	175	42	0,9	10
26060	2,0	4	175	42	1,8	10
26061	2,5	4	175	42	3,8	10
26062	3,0	4	175	42	5,5	10
26063	4,0	4	175	42	8,0	10

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX:
MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

Cable key for circular plug connector

Hexagon head for torque screwdriver with long handle

28594

Order-No.	∩	⬣	⟷	mm	max. Nm	
36414	8	4	78	218	1	10
36415	9	4	78	218	1	10
36417	13	4	78	218	1,5	10
36418	14	4	78	218	1,5	10
36421	18	4	78	218	1,5	5

Adapter blade

internal square for torque screwdriver with long handle

285992

Order-No.	▣	⬣	mm	
26229	1/4	4	155	10

Bit holder clamping with ball

for torque screwdriver with long handle

285994

Order-No.	○	⬣	mm		
27526	1/4	4	162	11	10

Adjusting tool

for torque screwdriver with long handle

2859

Order-No.	mm	⟷	
26864	146	90	1

Torque screwdriver with T-handle set TorqueVario®-S T

assorted, variably adjustable torque limit, 11-pcs. in box

2893 S01

Order-No.		
29234		1
○	Torque screwdriver with T-handle TorqueVario®-S T Variable torque limit settings / 5 - 14 Nm	
	Adjusting tool for torque screwdriver with T-handle	
▣	Adapter blade for torque screwdriver with T-handle 1/4" / Adapter blade for torque screwdriver with T-handle 3/8"	
○	Bit holder for torque screwdriver with T-handle	
✱	T25 x 25 / T30 x 25 / T40 x 25	
●	4,0 x 25 / 5,0 x 25 / 6,0 x 25	

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueVario®-S T

○ Variable torque limit settings

2893

Order-No.	Nm	±%	○			
29233	5-14	6%	6	56	120	1

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueFix® T

○ permanently pre-set torque limit

2891

Order-No.	Nm	±%	○			
29228	6	6%	6	56	120	1
29229	8	6%	6	56	120	1
29230	10	6%	6	56	120	1
29231	12	6%	6	56	120	1
29236	12,5	6%	6	56	120	1
29232	14	6%	6	56	120	1

DIN EN ISO 6789.

Which product is available with which drive? Page 304

Interchangeable blade

TORX® for torque screwdriver with T-handle

28995

Order-No.			mm		max. Nm	max. in.lbs.	
28734	T15	6	130	53	5,5	49	10
28735	T20	6	130	53	10	88	10
28736	T25	6	130	53	15	132	10
28737	T27	6	130	53	15	132	10
28738	T30	6	130	53	15	132	10
28739	T40	6	130	53	15	132	10

TORX PLUS® for torque screwdriver with T-handle

28996

Order-No.			mm		max. Nm	max. in.lbs.	
28740	15IP	6	130	53	6,6	59	10
28741	20IP	6	130	53	13	115	10
28742	25IP	6	130	53	15	132	10
28743	27IP	6	130	53	15	132	10
28744	30IP	6	130	53	15	132	10
28745	40IP	6	130	53	15	132	10

Hex for torque screwdriver with T-handle

28993

Order-No.			mm		max. Nm	max. in.lbs.	
28746	3	6	130	53	5,5	49	10
28747	4	6	130	53	15	132	10
28748	5	6	130	53	15	132	10
28749	6	6	130	53	15	132	10

Adapter blade

for torque screwdriver with T-handle

28999

Order-No.			mm			
28756	1/4	6	120	53		10
28757	3/8	6	120	53		10

Bit holder

for torque screwdriver with T-handle

28999

Order-No.			mm			
28758	1/4	6	125	11		10

Adjusting tool

for torque screwdriver with T-handle

2899

Order-No.		mm		
28691	90	146		1

Torque screwdriver with key handle TorqueFix® Key

permanently pre-set torque limit

28360

Order-No.	Nm	±%				
38616	0,5	6%	4	68	50	1
38617	0,6	6%	4	68	50	1
38618	0,9	6%	4	68	50	1
38556	1,1	6%	4	68	50	1
38800	1,2	6%	4	68	50	1
38619	1,4	6%	4	68	50	1
38557	2,0	6%	4	68	50	1
38620	2,5	6%	4	68	50	1
38621	3,0	6%	4	68	50	1
38558	3,8	6%	4	68	50	1
38622	4,0	6%	4	68	50	1

DIN EN ISO 6789.

Interchangeable blade

Hexagon for torque screwdriver with key handle

283693

Order-No.			mm		max. Nm	
38801	1,5	4	75	20	0,9	10
38802	2,0	4	75	20	1,8	10
38803	2,5	4	75	20	3,8	10
38804	3,0	4	75	20	5,5	10
38805	4,0	4	75	20	8,0	10

Interchangeable blade

TORX® for torque screwdriver with key handle

283695

Order-No.			mm		max. Nm	SB	
38806	T6	4	75	20	0,6		10
38807	T7	4	75	20	0,9		10
38808	T8	4	75	20	1,3		10
38809	T9	4	75	20	2,5		10
38810	T10	4	75	20	3,8		10
38811	T15	4	75	20	5,5		10
38812	T20	4	75	20	8,0		10
38813	T25	4	75	20	8,0		10

Interchangeable blade

TORX PLUS® for torque screwdriver with key handle

283696

Order-No.			mm		max. Nm	
38814	6IP	4	75	20	0,8	10
38815	7IP	4	75	20	1,3	10
38816	8IP	4	75	20	2,0	10
38817	9IP	4	75	20	3,0	10
38818	10IP	4	75	20	4,5	10
38819	15IP	4	75	20	6,6	10
38820	20IP	4	75	20	8,0	10

Which product is available with which drive? Page 304

Torque screwdriver set TorqueVario®-S ESD

assorted, variably adjustable torque limit, 13-pcs. in box

Order-No.		2882 S10
27687		1
○	Torque screwdriver TorqueVario®-S ESD Variable torque limit settings ,0,5 - 2,0 Nm	
○	Bit holder clamping with ball for torque screwdriver with long handle	
	Adjusting tool for torque screwdriver with long handle	
⊖	4,5 x 25 / 5,5 x 25	
⊕	PH0 x 25 / PH1 x 25	
⊕	PZ0 x 25 / PZ1 x 25	
✱	T7 x 25 / T8 x 25 / T9 x 25 / T10 x 25	

IEC 61340-5-1. DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S ESD

○ Variable torque limit settings

Order-No.	Nm	±%	○			2882
36851	0,04-0,46•	10%	4	127	23	1
26865	0,1-0,6	10%	4	127	23	1
36852	0,1-0,6	6%	4	127	23	1
26629	0,4-1,0	6%	4	127	23	1
26866	0,5-2,0	6%	4	131	30	1
30495	0,8-5,0	6%	4	138	36	1

• Precision in range of 0.1-0.46 Nm. IEC 61340-5-1. DIN EN ISO 6789.

INFOBOX:

Electrostatic conductive ESD tools



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Overview of torque tools

Tools	Precision	Setting	Special feature	Nm range	Torque range 0,01 Nm 0,1 Nm 1 Nm 10 Nm
iTorque	± 6 %	variable	Écran digital Click control Calibration alarm Can be recalibrated	0,4 – 1,5 0,8 – 3,0 1,0 – 5,0	
TorqueVario®-S	± 10 % ± 6 %/± 10 % ± 6 %	variable	Numeric scale	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0 2,0 – 7,0	
TorqueVario®-S ESD	± 10 % ± 6 %/± 10 % ± 6 %	variable	ESD-compliant, numeric scale	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0	
TorqueFix®	± 6 %	fixed	Permanently preset in factory	16 Versions 0,4 – 7,2	
easyTorque	± 10%	fixed	Permanently preset in factory	13 Versions 0,5 – 5,0	
TorqueFix® Key	± 6 %	fixed	Permanently preset in factory	0,5 – 4,0	
easyTorque adapter	± 10%	fixed	VDE certification, Permanently preset in factory	5 Versions 0,8 – 4,0	
TorqueVario®-S VDE	± 6 %	variable	VDE certification, numeric scale	0,5 – 2,0 0,8 – 5,0 2,0 – 7,0	
TorqueVario®-S T electric		variable	VDE certification, numeric scale	5 – 14	
TorqueVario®-S T	± 6 %	variable	Numeric scale	5,0 – 14	
TorqueFix®-T	± 6 %	fixed	Permanently preset in factory	6 Versions 6,0 – 14	

Which product is available with which drive? Page 304

Interchangeable blades

Series 2859

Series 28369

slimBits
Series 2831



Series 28379

Series 2899

All prices not including statutory VAT.

Multitools
Many talents in the minimum space.

Fewer tools mean less load, better handling and efficient work. The more a tool can do, the better: Wiha multitools are compact, versatile tools which save space and and reduce overall weight, making them the perfect portable companion.

In the Wiha LiftUp magazine bit holder, the most commonly used bits are neatly stored in the handle, ensuring they are always ready for use and easy to handle. The Wiha reversible blade system offers a variety of interchangeable blades, the lengths of which can be adjusted as required. The small, compact Wiha PocketStars contain the most commonly used L-keys - indispensable helpers for all equipment. The Wiha Stubby magazine combines six drive formats in one, allowing completely unrestricted access to all confined spaces thanks to its extremely short screwdriver handle.

All-in-one tools

Screwdriver with bit magazine LiftUp electric
Page 180

Screwdriver with bit magazine LiftUp 26one® assorted with 13 double bits in blister pack, 1/4"
Page 181

Screwdriver with bit magazine magnetic Slotted, Phillips with 6 bits, Stubby, 1/4"
Page 182

Multitool PocketStar assorted 9-pcs.
Page 183

Multitool PocketStar TORX® 8-pcs.
Page 183

Multitool PocketStar Hexagonal ball end MagicRing® 7-pcs.
Page 185

Switch cabinet key pen shape
Page 186

Nut driver insert gripper
Page 186

Interchangeable blade sets

Screwdriver with interchangeable blade set SYSTEM 6 assorted 11-pcs.
Page 187

Screwdriver with interchangeable blade set SYSTEM 6 assorted 11-pcs.
Page 187

Screwdriver with interchangeable blade set SYSTEM 6 ESD assorted 6-pcs.
Page 189

Screwdriver with interchangeable blade set SYSTEM 4 assorted 11-pcs.
Page 191

Screwdriver with interchangeable blade set SYSTEM 4 ESD assorted 11-pcs.
Page 193

Slotted, Phillips with 6 slimBits

2831 09 020

Order-No.	SB	
38610		5
38612	x	1
⊖ 1 x 2,5 / 1 x 3,0 / 1 x 4,0 / 1 x 5,5		
⊕ 1 x PH1 / 1 x PH2		

Manufactured acc. to IEC 60900.

Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits

2831 09 021

Order-No.	SB	
38611		5
38613	x	1
⊖ 1 x 3,0 / 1 x 4,0 / 1 x 5,5		
⊕ 1 x PH1 / 1 x PH2		
✳ 1 x SL/PZ2		

Manufactured acc. to IEC 60900.

Pozidriv, PlusMinus/Pozidriv, slotted with 6 slimBits

2831 09 023

Order-No.	SB	
41234		5
41235	x	1
⊖ 1 x 2,5 / 1 x 3,5 / 1 x 5,5		
✳ 1 x PZ1 / 1 x PZ2		
✳ 1 x SL/PZ2		

Manufactured acc. to IEC 60900.

TORX® with 6 slimBits

2831 09 022

Order-No.	SB	
41157		5
41158	x	1
✳ 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25		

Manufactured acc. to IEC 60900.



INFOBOX:
slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Which drives are used for each individual product? Page 304

Screwdriver with bit magazine LiftUp 26one®

assorted with 13 double bits in blister pack, 1/4" SB 3803 04 02001

Order-No.	
40907	1
4,0 - 6,0	
PH0 - PH3 / PH1 - PH2	
T10 - T15 / T20 - T25 / T27 - T30	
PZ1 - PZ2	
#1 - #2	
3 - 4 / 5 - 6 / 3/32 - 7/64 / 1/8 - 9/64 / 5/32 - 3/16	

LiftUp 26one® bit set refill pack 1

Mixed, 13-pcs. in blister pack 3803 04 013

Order-No.	
41385	1
T10 - T15 / T20 - T25 / T27 - T30	
PH1 - PH2 / PH0 - PH3	
PZ1 - PZ2	
#1 - #2	
4,0 - 6,0	
3 - 4 / 5 - 6 / 3/32 - 7/64 / 1/8 - 9/64 / 5/32 - 3/16	

LiftUp 26one® bit set refill pack 2

Mixed, 13-pcs. in blister pack 3803 04 007

Order-No.	
41384	1
2x 4,0 - 6,0	
2x PZ1 - PZ2	
2x PH1 - PH2 / 2x PH0 - PH3	
2x T10 - T15 / 1x T20 - T25 / 2x T27 - T30	

INFOBOX:
LiftUp 26one®

Most of the world's common drives in one tool!

- The LiftUp 26one® has 13 double bits; 12 in the magazine and 1 double bit in the bit holder.
- The bit magazine opens out at the press of a button, enabling the removal of the bits.
- Unlimited access to low-lying screws thanks to the automatically locking SuperSlim bit holder.
- Powerful screw fastening or loosening thanks to the large screwdriver handle.

Screwdriver with LiftUp 25 magnetic bit magazine

Mixed with 12 bits, 1/4"

3803 02 020

Order-No.	SB	
38600		5
38605	x	5
⊖	1 x 4,5 / 1 x 6,5	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	
✱	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
✱	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	

Mixed with 12 bits, 1/4"

3803 02 021

Order-No.	SB	
38601		5
38606	x	5
⊖	1 x 5,5	
⊕	1 x PH2	
✱	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
✱	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	
●	1 x 3,0 / 1 x 4,0 / 1 x 5,0	

Screwdriver with bit magazine magnetic

assorted with 8 bits, 1/4"

3809 01 01

Order-No.	SB	
32901		5
33007	x	5
⊖	1 x 6,5	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	
✱	1 x PZ2	
✱	1 x T15 / 1 x T20 / 1 x T25	

TORX® with 8 bits, 1/4"

3809 01 02

Order-No.	SB	
32902		5
33008	x	5
✱	1 x T6 / 1 x T8 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	

Slotted, Phillips with 8 bits, 1/4"

3809 01 03

Order-No.	SB	
32903		5
33009	x	5
⊖	1 x 5,5 / 1 x 6,5	
⊕	1 x PH1 / 3 x PH2 / 2 x PH3	

Screwdriver with bit magazine magnetic

Slotted, Phillips with 6 bits, Stubby, 1/4"

3801 01

Order-No.	SB	
33736		10
33738	x	5
⊖	1 x 4,5 / 1 x 6,5 / 1 x 8,0	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	

Phillips, Pozidriv with 6 bits, Stubby, 1/4"

3801 02

Order-No.	SB	
33740		10
33741	x	5
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	
✱	1 x PZ1 / 1 x PZ2 / 1 x PZ3	

TORX® with 6 bits, Stubby, 1/4"

3801 03

Order-No.	SB	
33743		10
33744	x	5
✱	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	

Slotted, Pozidriv with 6 bits, Stubby, 1/4"

3801 04

Order-No.	SB	
33764		10
33746	x	5
⊖	1 x 4,5 / 1 x 6,5 / 1 x 8,0	
✱	1 x PZ1 / 1 x PZ2 / 1 x PZ3	

Multitool PocketStar

assorted 9-pcs. **351 PG9X**

Order-No.	SB	
25293		5
25295	x	5

⊖	4,5
⊕	PH2
✱	T10 / T15 / T20
●	3 / 4 / 5 / 6

Multitool PocketStar

TORX® 8-pcs. **363 P8**

Order-No.	SB	
23047		5
23049	x	5

✱	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

Multitool Mini PocketStar

Phillips, internal hexagon, slotted 8-pcs. blister packed with hanging hole **SB 351 PM8X**

Order-No.	
27936	5

●	0,7 / 0,9 / 1,3 / 1,5 / 2,0
⊖	1,5 / 2,0
⊕	PH00

INFOBOX:
PocketStar

The Multitool that fits in your pocket

- Simple and easy selection of the desired key size at the touch of a button.
- Can be used as a screwdriver long handle and T-handle.
- 270° limit for safe work prevents trapped fingers.
- Covered ends on both pivot axes prevent clothing from being caught.

Multitool PocketStar

TORX® 7-pcs. **363 P7**

Order-No.	SB	
23051		5
23053	x	5
T7 / T8 / T9 / T10 / T15 / T20 / T25		

Multitool PocketStar

TORX® Tamper Resistant (with hole) 7-pcs. **363TR P7**

Order-No.	SB	
25128		5
25164	x	5
T7H / T8H / T9H / T10H / T15H / T20H / T25H		

Multitool PocketStar

TORX® Tamper Resistant (with hole) 8-pcs. **363TR P8**

Order-No.	SB	
25130		5
25166	x	5
T9H / T10H / T15H / T20H / T25H / T27H / T30H / T40H		

INFOBOX:

TORX® tamper-resistant safety profile

- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

Which drives are used for each individual product? Page 304

Multitool PocketStar

Hexagonal ball end MagicRing® 7-pcs. 369R P7

Order-No.	SB	
23031		5
23033	x	5
● 2 / 2,5 / 3 / 4 / 5 / 6 / 8		

Multitool PocketStar

Hexagon 7-pcs. 351 PK7

Order-No.	SB	
23035		5
23037	x	5
● 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6		

Multitool PocketStar

Hexagon 7-pcs. 351 PG7

Order-No.	SB	
23040		5
23041	x	5
● 2 / 2,5 / 3 / 4 / 5 / 6 / 8		

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX:
MagicRing®



Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

Switch cabinet key pen shape

1/4" in blister pack

SB 246 81

Order-No.							SB	
39076	5-8	9	3-5	7,0	PH2	T20 / T25	x	1

Nut driver insert set gripper

Hexagon with ratchet 3/8" and adapter for screwdriver in blister pack 3-pcs.

SB 246 02

Order-No.	SB	
20783	x	1
	Nut driver insert gripper 3/8"	
	Ratchet 3/8"	
	Adapter 3/8"	

Switch cabinet key cross shape



246 67

Order-No.						
36114	5-8	9	3-5	7,0	PH2	1

Nut driver insert gripper

3/8" in blister pack

SB 246 01

Order-No.				mm	SB	
20554	7-19	3/8	25,4	53,5	x	1

Which drives are used for each individual product? Page 304

Screwdriver with interchangeable blade set SYSTEM 6

assorted 11-pcs. **281 B11**

Order-No.	
00623	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
⊖ ⊖	4,0 - 6,0 / 5,5 - 6,5
⊕ ⊕	PH1 - PH2
✣ ✣	PZ1 - PZ2
✱ ✱	T10 - T15 / T20 - T25 / T30 - T40
● ●	4 - 4 • / 5 - 5 • / 6 - 6 •

• With ball end

INFOBOX:
SYSTEM 6

Screwdriver with interchangeable blades

- Flexible, versatile interchangeable blade system in industrial quality.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Desired blade length can be set (42 – 114 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 6

assorted 11-pcs. **281 T11**

Order-No.	
03591	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
⊖ ⊖	4,0 - 6,0 / 5,5 - 6,5
⊕ ⊕	PH1 - PH2
✣ ✣	PZ1 - PZ2
✱ ✱	T10 - T15 / T20 - T25 / T30 - T40
● ●	4 - 4 • / 5 - 5 • / 6 - 6 •

• With ball end

Screwdriver with interchangeable blade set SYSTEM 6

assorted 6-pcs.

281 T6

Order-No.	
27715	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
⊖ ⊖	3,5 - 4,5 / 4,0 - 6,0 / 5,5 - 6,5
⊕ ⊕	PH1 - PH2
● ●	5 - 5 •

• With ball end

assorted 6-pcs.

281 T6 01

Order-No.	
32298	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
⊖ ⊖	4,0 - 6,0
⊕ ⊕	PH1 - PH2
✱ ✱	PZ1 - PZ2
★ ★	T10 - T15 / T20 - T25

Screwdriver with interchangeable blade set SYSTEM 6

Hexagon nut driver 12-pcs.

U106 T12

Order-No.	
27713	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
○	4,0 - 150 / 4,5 - 150 / 5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 9,0 - 150 / 10,0 - 150 / 11,0 - 150 / 13,0 - 150

Screwdriver with interchangeable blade set SYSTEM 6

Hexagon nut driver 8-pcs.

U106 T8

Order-No.	
27712	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
○	5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 10,0 - 150 / 13,0 - 150

Which drives are used for each individual product? Page 304

Screwdriver with interchangeable blade set SYSTEM 6 ESD

assorted 6-pcs. **284ESD T6 01**

Order-No.	
31497	1
○	Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 6 interchangeable blade
⊖ ⊖	3,5 - 4,5 / 4,0 - 6,0 / 5,5 - 6,5
⊕ ⊕	PH1 - PH2
● ●	5 - 5 •

• With ball end

INFOBOX:

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Screwdriver with interchangeable blade set SYSTEM 6

○ for SYSTEM 6 interchangeable blade **284**

Order-No.	○	⇄	⇕	SB	
30372	6,0	120	36		5
30404	6,0	120	36	x	5

Screwdriver handle SoftFinish®-telescopic ESD

○ for SYSTEM 6 interchangeable blade **284ESD**

Order-No.	○	⇄	⇕	
31496	6,0	120	36	5

IEC 61340-5-1.

Interchangeable blade SYSTEM 6

Slotted

284

Order-No.	⊖	⊖	⊖↕	⊖↕	mm	⬢↕	
27627	3,5	4,5	0,6	0.8	150	6,0	5
00629	4,0	6,0	0,8	1.0	150	6,0	5
00630	5,5	6,5	1,0	1.2	150	6,0	5

Slotted, Phillips

284

Order-No.	⊖	⊕	⊖↕	mm	⬢↕	
00665	4,0	PH1	0,8	150	6,0	5
00666	6,0	PH2	1,0	150	6,0	5
00667	6,5	PH3	1,2	150	6,0	5

Phillips

284

Order-No.	⊕	⊕	mm	⬢↕	
00631	PH1	PH2	150	6.0	5
27628	PH2	PH3	150	6.0	5

Pozidriv

284

Order-No.	⊕	⊕	mm	⬢↕	
00632	PZ1	PZ2	150	6.0	5
27629	PZ2	PZ3	150	6.0	5

TORX®

284

Order-No.	✱	✱	mm	⬢↕	
00654	T6	T8	150	6.0	5
00655	T7	T9	150	6.0	5
00656	T10	T15	150	6.0	5
00657	T20	T25	150	6.0	5
00658	T30	T40	150	6.0	5

TORX® Tamper Resistant (with hole)

284

Order-No.	✱	✱	mm	⬢↕	
27630	T6H	T8H	150	6.0	5
27631	T7H	T9H	150	6.0	5
27632	T10H	T15H	150	6.0	5
27633	T20H	T25H	150	6.0	5
27634	T30H	T40H	150	6.0	5

Ball end hex

284

Order-No.	◉	◉	mm	⬢↕	
00635	2,5	2,5	150	6.0	5
00636	3	3	150	6.0	5
00637	4•	4	150	6.0	5
00638	5•	5	150	6.0	5
00639	6•	6	150	6.0	5

• With ball end

Torq-Set®

284

Order-No.	✣	✣	mm	⬢↕	
27635	TS2	TS4	150	6.0	5
27636	TS6	TS8	150	6.0	5

Tri-Wing® 1/4"

284

Order-No.	✇	✇	mm	⬢↕	
27637	TW0	TW1	150	6.0	5
27638	TW2	TW3	150	6.0	5
27639	TW4	TW5	150	6.0	5

Interchangeable blade SYSTEM 6

1/4" square adapter for nut driver inserts

7803

Order-No.	▣	mm	⬢↕	
03883	1/4	150	6,0	5

Interchangeable blade SYSTEM 6

Hex nut driver

U 106

Order-No.	○	mm	⬢↕	
08900	4,0	150	6,0	1
08901	4,5	150	6,0	1
08902	5,0	150	6,0	1
08903	5,5	150	6,0	1
08904	6,0	150	6,0	1
08905	7,0	150	6,0	1
08906	8,0	150	6,0	1
08907	9,0	150	6,0	1
08908	10,0	150	6,0	1
08909	11,0	150	6,0	1
08911	13,0	150	6,0	1

Bit holder SYSTEM 6 clamping with ball

○

7802

Order-No.	○	mm	⬢↕		
03882	1/4	150	6,0	10	5

Which drives are used for each individual product? Page 304

Screwdriver with interchangeable blade set SYSTEM 4

assorted 11-pcs. **269 T11**

Order-No.	
00610	5
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
⊖ ⊖	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
⊕ ⊕	PH000 - PH00 / PH0 - PH1
● ●	1,3 - 1,3 / 1,5 - 1,5 / 2 - 2 • / 2,5 - 2,5 • / 3 - 3 •

• With ball end

assorted 11-pcs. **269 T11 01**

Order-No.	
27820	1
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
⊖ ⊖	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
⊕ ⊕	PH000 - PH00 / PH0 - PH1
✱ ✱	T6 - T8 / T7 - T9
● ●	1,5 - 1,5 / 2 - 2 • / 2,5 - 2,5 •

• With ball end

INFOBOX:
SYSTEM 4

Screwdriver with interchangeable blades

- Flexible, versatile precision interchangeable blade system for delicate fastening tasks.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Press and hold sleeve: Desired blade length can be set (18 – 90 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 4

slotted, Phillips, hexagon head, 4-pcs. **269 T4**

Order-No.	
00613	5
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
⊖ ⊕	2,0 - PH00 / 3,0 - PH0 / 4,0 - PH1

Slotted, Phillips, hex 6-pcs. **269 T6**

Order-No.	
00616	5
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
⊖ ⊖	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
⊕ ⊕	PH000 - PH00 / PH0 - PH1

Phillips, TORX® 6-pcs. **269 T6 01**

Order-No.	
26121	5
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
⊕ ⊕	PH000 - PH00 / PH0 - PH1
✱ ✱	T3 - T4 / T5 - T6 / T8 - T10

Bit set SYSTEM 4 ESD

assorted 26-pcs. **7000 EB26 ESD**

Order-No.	
33848	1
	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
	1 x Bit holder SYSTEM 4 clamping with ball
	1 x 1,5 / 1 x 2,0 / 1 x 3,0 / 1 x 4,0
	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10
	1 x 0,7 / 1 x 0,9 / 1 x 1,3 / 1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 4,0

IEC 61340-5-1.

Bit set SYSTEM 4 ESD

assorted 16-pcs. **7000 EB16 ESD**

Order-No.	
33503	1
	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
	1 x Bit holder SYSTEM 4 clamping with ball
	1 x 2,0 / 1 x 3,0
	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T8
	1 x 0,9 / 1 x 1,3 / 1 x 1,5

DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.

Which drives are used for each individual product? Page 304

Screwdriver with interchangeable blade set SYSTEM 4 ESD

assorted 11-pcs. **2691 T11 ESD**

Order-No.		
31499		5
○	Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade	
⊖ ⊖	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0	
⊕ ⊕	PH000 - PH00 / PH0 - PH1	
✱ ✱	T6 - T8 / T7 - T9	
● ●	1,5 - 1,5• / 2 - 2• / 2,5 - 2,5•	

• With ball end

Screwdriver handle SoftFinish®-telescopic

○ for SYSTEM 4 interchangeable blade **2691**

Order-No.	◉	⟷	↕	
30373	4,0	105	23	10

Screwdriver handle SoftFinish®-telescopic ESD

○ for SYSTEM 4 interchangeable blade **2691ESD**

Order-No.	○	⟷	↕	
31498	4,0	105	23	10

IEC 61340-5-1.

Interchangeable blade SYSTEM 4

⊖ Slotted **269**

Order-No.	⊖	⊖	↕	↕	mm	⬢	
00576	1,5	3,0	0,25	0.5	120	4,0	5
00577	2,0	3,5	0,4	0.6	120	4,0	5
00578	2,5	4,0	0,4	0.8	120	4,0	5

⊖ Slotted/ Phillips **269**

Order-No.	⊖	⊕	↕	mm	⬢	
00601	2,0	PH00	0,4	120	4,0	5
00602	3,0	PH0	0,5	120	4,0	5
00603	4,0	PH1	0,8	120	4,0	5

⊕ Phillips **269**

Order-No.	⊕	⊕	mm	⬢	
00579	PH000	PH00	120	4.0	5
00580	PH0	PH1	120	4.0	5

✱ Pozidriv **269**

Order-No.	✱	✱	mm	⬢	
03186	PZ0	PZ1	120	4.0	5

✱ TORX® **269**

Order-No.	✱	✱	mm	⬢	
26122	T1	T2	120	4.0	5
26123	T3	T4	120	4.0	5
26124	T5	T6	120	4.0	5
00597	T6	T8	120	4.0	5
00598	T7	T9	120	4.0	5
00599	T10	T15	120	4.0	5
00600	T15	T20	120	4.0	5

● Ball end hex **269**

Order-No.	◉	◉	mm	⬢	
00582	1,3•	1,3	120	4.0	5
00583	1,5•	1,5	120	4.0	5
00584	2•	2	120	4.0	5
00585	2,5•	2,5	120	4.0	5
00586	3•	3	120	4.0	5
00587	4•	4	120	4.0	5

• With ball end

L-keys
Difficult to access - easily solved.

Wiha L-keys are essential for all users who are faced with a screw fastening task in difficult work conditions. For difficult-to-access screws Wiha L-keys with a shortened L-key arm prove themselves to be ideal . The risk of injury is significantly reduced as the hand-working space is increased by over 30%.

Wiha ball-end tools enable fastening at angles of up to 25° per side. The risk of an accident is reduced since the tool does not slip out of the screw. Screws made of steel and non-magnetic materials are securely held in any position with the Wiha MagicRing and MagicSpring.

L-key holders

L-key set in ErgoStar holder hexagonal ball Magicring® 9-pcs. in flourescent colour
Page 196

L-key set in ErgoStar holder Hexagonal ball end MagicRing® matt chrome-plated 9-pcs.
Page 197

L-key set in ProStar holder Matt chrome-plated hexagonal ball end with short shaft, 9-pcs.
Page 198

L-key set in ProStar holder Hexagonal ball end matt chrome-plated 9-pcs.
Page 198

L-key set in Compact holder Hexagonal ball end, 9-pcs., short, matt chrome-plated
Page 199

L-key set in ErgoStar holder TORX® ball end, 13-pcs., black oxidised
Page 202

L-key set in ProStar holder TORX® titanium silver 13-pcs.
Page 203

L-key set in ProStar holder TORX®, 13-pcs., black oxidised
Page 203

L-key set in Classic holder TORX PLUS® MagicSpring®, 8-pcs., medium-length, black oxidised
Page 204

L-key with T-handle ComfortGrip Hexagonal ball end with side drive, matt chrome-plated
Page 204

L-key with key handle TORX®, black oxidised
Page 206

L-key with flag handle TORX®, black oxidised
Page 206

L-key set in ErgoStar holder

hexagonal ball Magicring® 9-pcs. in flourescent colour **369RF**

Order-No.	SB	
41979		5
41980	x	5
⬢ 1,5 / 2 / 2,5		
⬢ 3 / 4 / 5 / 6 / 8 / 10		

MagicRing® from size 3 mm. Based on ISO 2936L.

L-key set in ErgoStar holder

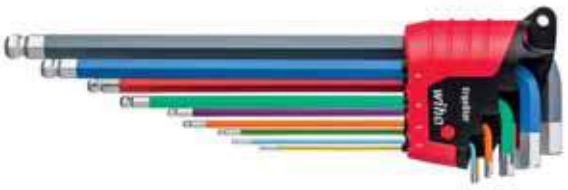

hexagonal ball end, 9-pcs. in fluorescent colour **369F**

Order-No.	SB	
41483		5
41484	x	5
⬢ 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

INFOBOX:
Tools in fluorescent colour

- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.

INFOBOX:
ErgoStar

The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.
- Wall bracket for practical storage of the ErgoStar holder in the workshop.

L-key set in ErgoStar holder

Hexagonal ball end MagicRing® matt chrome-plated 9-pcs. 369R

Order-No.	SB	
37351		5
37352	x	5
● 1,5 / 2 / 2,5		
● 3 / 4 / 5 / 6 / 8 / 10		

MagicRing® from size 3 mm. Based on ISO 2936L.

L-key set in ErgoStar holder

Hexagonal ball end MagicRing® matt chrome-plated, inch design 13-pcs. 369RZ

Order-No.	SB	
36521		5
36522	x	5
● 0.05 / 1/16 / 5/64 / 3/32 / 7/64		
● 1/8 / 9/64 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16 / 3/8		

MagicRing® from 1/8" Based on ASME B18.3.

Wall bracket

for L-key in ErgoStar holder 369

Order-No.	
39205	5

INFOBOX:
MagicRing®

Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

L-key set in ProStar holder

Matt chrome-plated hexagonal ball end with short shaft, 9-pcs.

369T

Order-No.	SB	
35480		5
35481	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in ProStar holder

Hexagonal ball end in inch design, 13-pcs., black oxidised

369ZB

Order-No.	SB	
24189		5
24851	x	5

0.05 / 1/16 / 5/64 / 3/32 / 7/64 / 1/8 / 9/64 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16 / 3/8

Based on ASME B18.3.

L-key set in ProStar holder

Hexagonal ball end matt chrome-plated 9-pcs.

369

Order-No.	SB	
07185		5
07192	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in Compact holder

Hexagonal ball end matt chrome-plated 11-pcs.

369

Order-No.	SB	
36453		5
36454	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10

Including 7 mm and 9 mm special sizes. Based on ISO 2936L.

INFOBOX:

L-key with short shaft

Especially for hard-to-reach screws and confined spaces

Improved accessibility thanks to a 60% reduction in length of the short L-key side.

- Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.
- Ball end geometry enables fastening at an angle of up to 25°.

Which drives are used for each individual product? Page 304

L-key set in Compact holder

Hexagonal ball end matt chrome-plated 9-pcs. 369

Order-No.	SB	
01418		5
02292	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in Classic holder

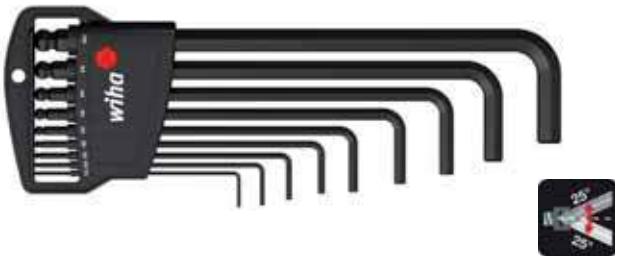

Hexagonal ball end, 9-pcs., black oxidised 369B

Order-No.	SB	
03879		5
03992	x	10

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in Compact holder

Hexagonal ball end, 9-pcs., short, matt chrome-plated 369K

Order-No.	SB	
40410		10
40411	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in Classic holder

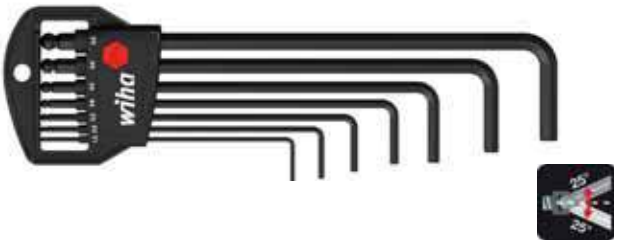

Hexagonal ball end, 7-pcs., black oxidised 369B

Order-No.	SB	
03878		5
03991	x	10

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6

Based on ISO 2936L.

L-key set in Classic holder

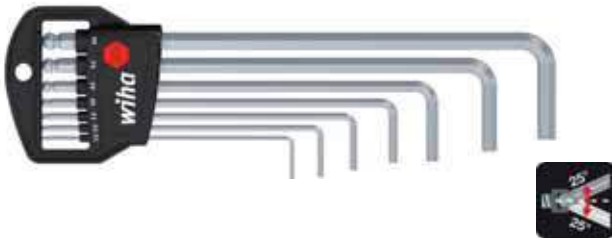

Hexagonal ball end matt chrome-plated 7-pcs. 369

Order-No.	SB	
01416		5
03723	x	10

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6

Based on ISO 2936L.

L-key set in Classic holder

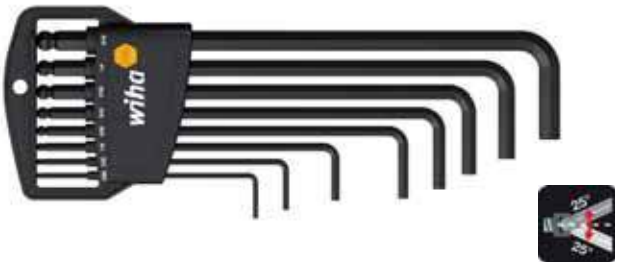

Hexagonal ball end, 8-pcs. in inch design, black oxidised 369ZB

Order-No.	SB	
01420		5
02939	x	10

5/64 / 3/32 / 1/8 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16

Based on ASME B18.3.

L-key set in Classic holder

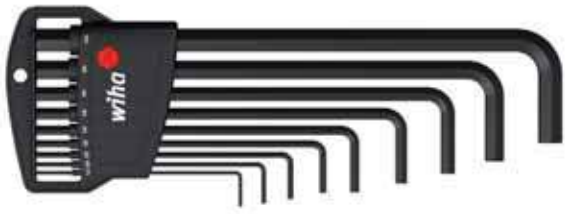

Hex, 9-pcs., black oxidised **352 H9B**

Order-No.	SB	
06386		5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in Classic holder

Hex, 9-pcs., black oxidised **350 H9**

Order-No.	SB	
06379		10

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

ISO 2936K.

L-key set in Classic holder

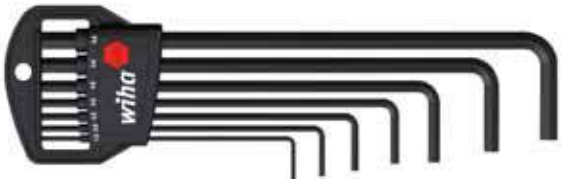

Hex, 7-pcs., black oxidised **352 H7B**

Order-No.	SB	
06384		5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6

Based on ISO 2936L.

L-key set in Classic holder

Hex, 7-pcs., black oxidised **350 H7**

Order-No.	SB	
06378		10

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6

ISO 2936K.

L-key set in Classic holder

Hex, 5-pcs., black oxidised **352 HM5B**

Order-No.	SB	
06382		10

0,7 / 0,9 / 1,3 / 1,5 / 2

Based on ISO 2936L.

L-key set in ErgoStar holder

TORX® MagicSpring®, 13-pcs., black oxidised **366R**

Order-No.	SB	
36503		5
36504	x	5
T5		
T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45		

MagicSpring® from size T6

L-key set in Classic holder

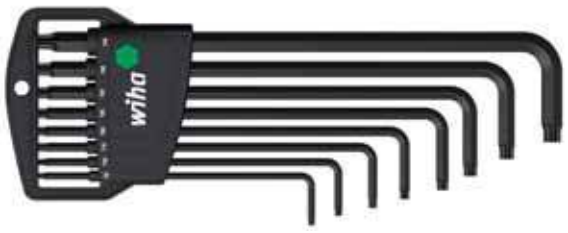

TORX® MagicSpring®, 8-pcs., black oxidised **366R**

Order-No.	SB	
34740		5
34741	x	10
T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40		

L-key set in Classic holder

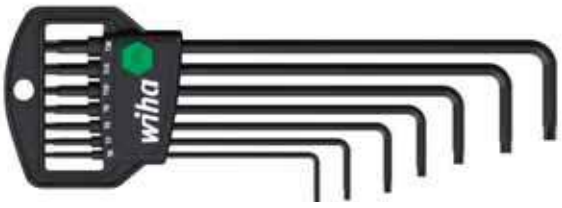

TORX® MagicSpring®, 7-pcs., black oxidised **366R**

Order-No.	SB	
33753		5
33754	x	5
T6 / T7 / T8 / T9 / T10 / T15 / T20		

INFOBOX:
MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

L-key set in ErgoStar holder

TORX® ball end, 13-pcs., black oxidised **366BE**

Order-No.	SB	
36487		5
36486	x	5
	T5 / T6 / T7 / T8	
	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	

TORX® ball end from size T9

L-key set in Classic holder

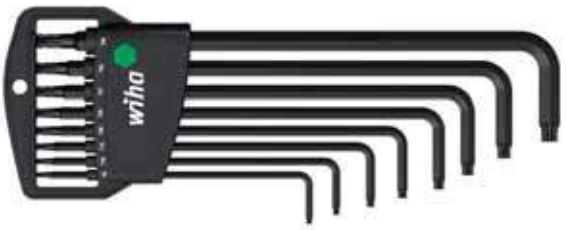

TORX® ball end, 8-pcs., black oxidised **366BE**

Order-No.	SB	
32394		5
32395	x	10
	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40	

L-key set in ProStar holder

Stubby TORX® ball end, 13-pcs. in titanium silver **366BET**

Order-No.	SB	
40979		5
40980	x	1
	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	

TORX® ball end from size T9

INFOBOX:
TORX® ball end



Wiha TORX® ball end

With optimised TORX® ball end geometry

- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

Which drives are used for each individual product? Page 304

L-key set in ProStar holder

TORX® titanium silver 13-pcs. 366TS

Order-No.	SB	
39104		5
39105	x	5

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45

L-key set in ProStar holder

TORX®, 13-pcs., black oxidised 366

Order-No.	SB	
24312		5
24852	x	5

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T50

L-key set in Classic holder

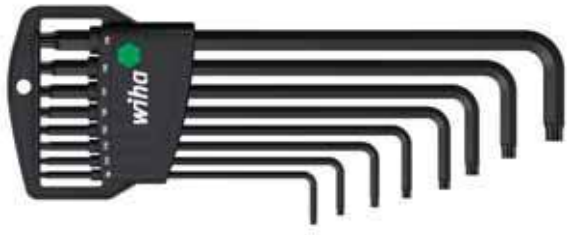

TORX®, 8-pcs., black oxidised 366

Order-No.	SB	
34736		5
34737	x	10

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

L-key set in Classic holder

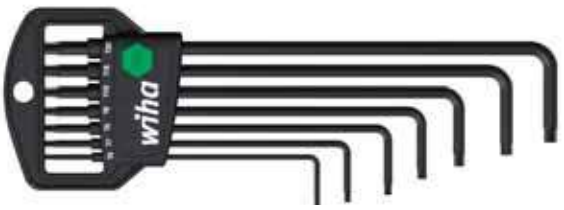

TORX®, 7-pcs., black oxidised 366 H7

Order-No.	SB	
34738		5

T6 / T7 / T8 / T9 / T10 / T15 / T20

L-key set in Classic holder

TORX®, 8-pcs., short, black oxidised 363

Order-No.	SB	
36461		5
36457	x	10

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

L-key set in Classic holder

TORX®, 7-pcs., short, black oxidised 363 H7

Order-No.	SB	
36460		5

T6 / T7 / T8 / T9 / T10 / T15 / T20

L-key set in Classic holder

TORX PLUS® MagicSpring®, 8-pcs., medium-length, black oxidised

371RIP H8

Order-No.	SB	
34742		5
9IP / 10IP / 15IP / 20IP / 25IP / 27IP / 30IP / 40IP		

TORX PLUS® keys cannot be used with TORX® screws.

L-key set in Classic holder

TORX PLUS® MagicSpring®, 7 pcs., medium-length, black oxidised

371RIP HM7

Order-No.	SB	
29208		5
6IP / 7IP / 8IP / 9IP / 10IP / 15IP / 20IP		

TORX PLUS® keys cannot be used with TORX® screws.

L-key set in Classic holder

TORX PLUS®, 8-pcs. in black oxidised

361IP

Order-No.	SB	
36459		5
36456	x	10
9IP / 10IP / 15IP / 20IP / 25IP / 27IP / 30IP / 40IP		

TORX PLUS® keys cannot be used with TORX® screws.

L-key set in Classic holder

TORX® Tamper Resistant (with hole), 8-pcs., black oxidised

363TR

Order-No.	SB	
36462		5
36458	x	10
T9H / T10H / T15H / T20H / T25H / T27H / T30H / T40H		

L-key with T-handle set ComfortGrip

Hexagon with side drive, matt chrome-plated 6-pcs.

334DS K6

Order-No.	SB	
26247		1
2,5 / 3 / 4 / 5 / 6 / 8		

L-key with T-handle set ComfortGrip

TORX®, with side drive, matt chrome-plated 6-pcs.

364DS K6

Order-No.	SB	
26248		1
T10 / T15 / T20 / T25 / T30 / T40		

L-key set

Short TORX® in work bench stand, 9-pcs., black oxidised

363 VB

Order-No.	SB	
01326		1
T10 / T15 / T20 / T25 / T30 / T40 / T50 / T55 / T60		

L-key with T-handle set

Hex in work bench stand, 7-pcs., brilliant nickel-plated

334 VB

Order-No.	
00953	1
2 x 100 / 2,5 x 100 / 3 x 100 / 4 x 150 / 5 x 150 / 6 x 200 / 8 x 200	

L-key with T-handle set

Hexagon MagicRing® brilliant nickel-plated in work bench stand 6-pcs.

334R VB

Order-No.	
22096	1
3 x 100 / 4 x 150 / 5 x 150 / 6 x 150 / 8 x 200 / 10 x 200	

L-key with T-handle set

Short TORX® in work bench stand, 7-pcs., matt chrome-plated

364 VB

Order-No.	
01348	1
T10 x 100 / T15 x 100 / T20 x 100 / T25 x 100 / T30 x 100 / T40 x 200 / T50 x 250	

L-key with key handle set

TORX® in work bench stand, 7 pcs., black oxidised **365 VB**

Order-No.	
25624	1
T6 x 35 / T7 x 35 / T8 x 40 / T9 x 40 / T10 x 40 / T15 x 45 / T20 x 45	

L-key with flag handle set

TORX® in work bench stand, 7 pcs., black oxidised **370 VB**

Order-No.	
25625	1
T6 x 35 / T7 x 35 / T8 x 40 / T9 x 40 / T10 x 40 / T15 x 45 / T20 x 45	

L-key with key handle set

TORX PLUS® in work bench stand, 7-pcs., black oxidised **365IP VB**

Order-No.	
26261	1
6IP x 35 / 7IP x 35 / 8IP x 40 / 9IP x 40 / 10IP x 40 / 15IP x 45 / 20IP x 45	

Which drives are used for each individual product? Page 304

L-keys

Hexagonal ball end MagicRing® matt chrome-plated

369R

Order-No.	◉	⟷	↕	
20549	3	128	23	10
20550	4	142	29	10
20570	5	163	33	10
20551	6	184	38	10
20552	8	206	44	10
20553	10	231	50	5

Based on ISO 2936L.

L-keys

Hexagonal ball end MagicRing®, inch design matt chrome-plated

369R Zoll

Order-No.	◉	⟷	↕	mm	
24302	1/8	121	23	3,17	10
24304	9/64	136	27	3,57	10
24303	5/32	148	29	3,96	10
24305	3/16	163	33	4,76	10
24306	7/32	176	36	5,55	10
24307	1/4	191	38	6,35	10
24308	5/16	210	43	7,93	10
24341	3/8	232	49	9,52	10

Based on ASME B18.3.

L-keys

hexagonal ball MagicRing® in fluorescent colour

369RF

Order-No.	◉	⟷	↕		
41973	3	128	23	Orange	10
41974	4	142	29	Purple	10
41975	5	163	33	Dark green	10
41976	6	184	38	Red	10
41977	8	206	44	Dark blue	10
41978	10	231	50	Anthracite	10

Based on ISO 2936L.

L-keys

hexagonal ball in flourescent colour

369F

Order-No.	◉	⟷	↕		
41894	1,5	91	15	Yellow	10
41895	2	101	18	Light blue	10
41896	2,5	113	20	Light green	10
41897	3	128	23	Orange	10
41898	4	142	29	Purple	10
41899	5	163	33	Dark green	10
41900	6	184	38	Red	10
41901	8	206	44	Dark blue	10
41902	10	231	50	Anthracite	5

L-keys

Hexagonal ball end with short side, matt chrome-plated

369T

Order-No.	◉	⟷	↕	
35482	1,5	91	5,5	10
35483	2	101	9	10
35484	2,5	113	9,5	10
35485	3	128	11	10
35486	4	142	13	10
35487	5	163	15	10
35488	6	184	18	10
35489	8	206	22	10
35490	10	231	28	5

Based on ISO 2936L.

L-keys

Hexagonal ball end, short

369K

Order-No.	◉	⟷	↕	
40401	1,5	46	15	10
40402	2	51	18	10
40403	2,5	57	20	10
40404	3	64	23	10
40405	4	72	29	10
40406	5	83	33	10
40407	6	94	38	10
40408	8	105	44	10
40409	10	119	50	10

As per ISO 2936K.

L-keys

Hexagonal ball end matt chrome-plated

369

Order-No.	◉	⟷	↕	
01392	1,5	91	15	10
01393	2	101	18	10
01395	2,5	113	20	10
01396	3	128	23	10
01398	4	142	29	10
01400	5	163	33	10
01402	6	184	38	10
07922	7	195	39	5
01404	8	206	44	10
36452	9	217	47	5
01406	10	231	50	5
01408	12	259	57	5

Based on ISO 2936L.

L-keys

Matt chrome-plated hexagonal ball end in inch design

369Z

Order-No.	◉	⟷	↕	mm	
29471	0.05	72	13	1,27	10
29472	1/16	80	15	1,59	10
29474	5/64	88	18	1,98	10
29473	3/32	101	20	2,38	10
29475	7/64	111	21	2,78	10

Based on ASME B18.3.

Which drives are used for each individual product? Page 304

hexagonal ball end, black oxidised

369B

Order-No.	◉	⟷	↕	
01391	1,3	74	14	10
05638	1,5	91	15	10
03868	2	101	18	10
03869	2,5	113	20	10
03870	3	128	23	10
03871	4	142	29	10
03872	5	163	33	10
03873	6	184	38	10
03874	8	206	44	10
03875	10	231	50	10
03876	12	259	57	10

Based on ISO 2936L.

Hexagonal ball end in inch design, black oxidised

369 Zoll B

Order-No.	◉	⟷	↕	mm	
01422	0.05	72	13	1,27	10
01423	1/16	80	15	1,59	10
01431	5/64	88	18	1,98	10
01427	3/32	101	20	2,38	10
01433	7/64	111	21	2,78	10
01425	1/8	121	23	3,18	10
01434	9/64	136	27	3,57	10
01430	5/32	148	29	3,97	10
01426	3/16	163	33	4,76	10
01432	7/32	176	36	5,56	10
01424	1/4	191	38	6,35	10
01429	5/16	210	43	7,94	10
01428	3/8	232	49	9,53	5

Based on ASME B18.3.

Hex , black oxidised

352B

Order-No.	◉	⟷	↕	
06358	0,7	67	6	5
06359	0,9	70	9	5
06360	1,3	80	13	5
06059	1,5	91	15	10
06361	2	101	18	10
06362	2,5	113	20	10
06363	3	128	23	10
06364	4	142	29	10
06365	5	163	33	10
06366	6	184	38	10
06367	7	194	41	10
06368	8	206	44	10
06369	10	231	50	5
06370	12	259	57	5
06371	14	291	70	5

Based on ISO 2936L.

L-keys

Hex, short, black oxidised

350

Order-No.	◉	⟷	↕	
06218	1,3	41	13	10
01121	1,5	46	15	10
01122	2	51	18	10
01123	2,5	57	20	10
01124	3	64	23	10
01126	4	72	29	10
01128	5	83	33	10
01130	6	94	38	10
01131	7	99	41	10
01132	8	105	44	10
01133	9	112	47	5
01134	10	119	50	5
01135	11	126	53	5
01136	12	134	57	5
01137	14	151	70	5
01138	17	173	80	5
01139	19	195	89	5
01140	22	217	102	1
01141	24	241	114	1
01142	27	271	127	1
01143	32	339	157	1

ISO 2936K.

L-keys

TORX® MagicSpring®, black oxidised

366R

Order-No.	✱	⟷	↕	⬢	
31233	T6	80	15	1/16	10
31234	T7	88	18	5/64	10
31235	T8	101	20	3/32	10
31236	T9	111	21	7/64	10
31237	T10	121	23	1/8	10
31238	T15	136	27	9/64	10
31239	T20	148	29	5/32	10
31240	T25	163	33	3/16	10
31241	T27	176	36	7/32	10
31242	T30	191	38	1/4	10
31243	T40	210	43	5/16	10
31244	T45	232	49	3/8	10

L-keys

TORX® ball end, black oxidised

366BE

Order-No.	✱	⟷	↕	⬢	
32386	T9	111	21	7/64	10
32387	T10	121	23	1/8	10
32388	T15	136	27	9/64	10
32389	T20	148	29	5/32	10
32390	T25	163	33	3/16	10
32391	T27	176	36	7/32	10
32392	T30	191	38	1/4	10
32393	T40	210	43	5/16	10
33749	T45	232	49	3/8	10
33750	T50	232	49	3/8	10

TORX® ball end with short handle, titanium silver

366BET

Order-No.					
40966	T5	72	6,5	0,05	10
40967	T6	80	6,9	1/16	10
40968	T7	89	8,9	5/64	10
40969	T8	101	10,4	3/32	10
40970	T9	111	11,8	7/64	10
40971	T10	122	12,0	1/8	10
40972	T15	136	12,5	9/64	10
40973	T20	149	13,3	5/32	10
40974	T25	164,5	16,2	3/16	10
40975	T27	176	18,0	7/32	10
40976	T30	191	19,2	1/4	10
40977	T40	210	24,1	5/16	10
40978	T45	232	29,5	3/8	10

TORX® ball end from size T9

TORX®, black oxidised

366

Order-No.					
24313	T5	72	13	0,05	10
24314	T6	80	15	1/16	10
24315	T7	88	18	5/64	10
24316	T8	101	20	3/32	10
24317	T9	111	21	7/64	10
24318	T10	121	23	1/8	10
24319	T15	136	27	9/64	10
24320	T20	148	29	5/32	10
24321	T25	163	33	3/16	10
24322	T27	176	36	7/32	10
24323	T30	191	38	1/4	10
24324	T40	210	43	5/16	10
24325	T50	232	49	3/8	10

TORX® titanium silver

366 TS

Order-No.					
39106	T5	72	13	0,05	10
39107	T6	80	15	1/16	10
39108	T7	88	18	5/64	10
39109	T8	101	20	3/32	10
39110	T9	111	21	7/64	10
39111	T10	121	23	1/8	10
39112	T15	136	27	9/64	10
39113	T20	148	29	5/32	10
39114	T25	163	33	3/16	10
39115	T27	176	36	7/32	10
39116	T30	191	38	1/4	10
39117	T40	210	43	5/16	10
39118	T45	232	49	3/8	10

TORX®, short, black oxidised

363

Order-No.					
03764	T5	39	18	2,5	10
01310	T6	41	18	2,5	10
01311	T7	44	18	2,5	10
01312	T8	47	18	2,5	10
01313	T9	51	19	3,0	10
01314	T10	54	20	3,0	10
01315	T15	57	22	3,5	10
01316	T20	62	23	4,0	10
01317	T25	67	25	4,5	10
01318	T27	72	27	5,5	10
01319	T30	79	30	6,0	10
01320	T40	86	33	7,0	10
01321	T45	90	36	8,0	10
01322	T50	104	41	9,0	10
01323	T55	120	47	12,0	10
01324	T60	134	52	14,0	10

L-keys

TORX PLUS® MagicSpring®, medium-length, black oxidised

371RIP

Order-No.					
29197	6IP	65	16	1/16	10
29198	7IP	71	18	5/64	10
29199	8IP	77	20	3/32	10
29200	9IP	83	22	7/64	10
29201	10IP	90	24	1/8	10
29202	15IP	97	26	9/64	10
29203	20IP	104	29	5/32	10
29204	25IP	112	33	3/16	10
29205	27IP	122	36	7/32	10
29206	30IP	132	40	1/4	10
29207	40IP	143	44	5/16	10

L-keys

TORX PLUS®, short, black oxidised

361IP

Order-No.					
24513	6IP	41	18	2,5	10
24515	7IP	44	18	2,5	10
24517	8IP	47	18	2,5	10
24519	9IP	51	19	3,0	10
24521	10IP	54	20	3,0	10
24523	15IP	58	22	3,5	10
24525	20IP	62	23	4,0	10
24527	25IP	67	25	4,5	10
24529	27IP	73	27	5,5	10
24531	30IP	79	30	6,0	10
24533	40IP	88	33	7,0	10

L-keys

TORX® Tamper Resistant (with hole), short, black oxidised

363TR

Order-No.					
24107	T8H	47	18	2,5	10
24109	T9H	51	19	3,0	10
24111	T10H	54	20	3,0	10
24113	T15H	57	22	3,5	10
24115	T20H	62	23	4,0	10
24117	T25H	67	25	4,5	10
24119	T27H	72	27	5,5	10
24121	T30H	79	30	6,0	10
24123	T40H	86	33	7,0	10

Which drives are used for each individual product? Page 304

L-key with T-handle ComfortGrip

Hexagon MagicRing® with side drive, matt chrome-plated

334DSR

Order-No.	◉	⟷	⟷	⟷	⟷	📦
26135	3	100	13	80	26	10
26136	4	150	13	80	26	10
26137	5	150	17	100	32	10
26138	6	150	17	100	32	10
26139	8	200	17	100	32	10
26140	10	200	22	120	38	5

L-key with T-handle ComfortGrip

Hex with side drive, matt chrome-plated

334DS

Order-No.	◉	⟷	⟷	⟷	⟷	📦
26164	2	100	13	80	26	10
26165	2,5	100	13	80	26	10
26166	3	100	13	80	26	10
26167	4	150	13	80	26	10
26168	5	150	17	100	32	10
26169	6	150	17	100	32	10
26170	8	200	17	100	32	10
26171	10	200	22	120	38	5

L-key with T-handle ComfortGrip

Hexagonal ball end with side drive, matt chrome-plated

540DS

Order-No.	◉	⟷	⟷	⟷	⟷	📦
28372	3	150	13	80	26	10
28373	4	150	13	80	26	10
28374	5	150	17	100	32	10
28375	6	150	17	100	32	10
28376	8	200	17	100	32	10
28377	10	200	22	120	38	5

L-key with T-handle ComfortGrip

TORX® with side drive, matt chrome-plated

364DS

Order-No.	✱	⟷	⟷	⟷	⟷	📦
26172	T10	100	13	80	26	10
26173	T15	100	13	80	26	10
26174	T20	100	17	100	32	10
26175	T25	150	17	100	32	10
26176	T27	150	17	100	32	10
26177	T30	150	17	100	32	10
26178	T40	150	17	100	32	10

L-key with T-handle

Hexagon MagicRing® brilliant nickel-plated

334R

Order-No.	◉	⟷	⟷	↕	↳	📦
22168	3	100	126	80	26	10
22170	4	150	176	80	26	10
22172	5	150	182	100	32	10
22174	6	150	182	100	32	10
21960	8	200	232	100	32	10
21962	10	200	238	120	38	10

L-key with T-handle

Hexagonal ball end brilliant nickel-plated

540

Order-No.	◉	⟷	⟷	↕	↳	📦
04111	4	150	176	80	26	10
04108	5	150	182	100	32	10
04105	6	150	182	100	32	10
04099	8	200	238	100	32	10
04096	10	200	238	120	38	10

L-key with T-handle

Hexagon brilliant nickel-plated

334

Order-No.	◉	⟷	⬡↕	⟷	↕	↳	📦
00904	2	100	-	126	80	26	10
00905	2	200	-	226	80	26	10
00906	2,5	100	-	126	80	26	10
00907	2,5	200	-	226	80	26	10
00908	3	100	-	126	80	26	10
00909	3	150	-	176	80	26	10
00910	3	200	-	226	80	26	10
00911	3•	350	5+	382	100	32	10
00912	4	100	-	126	80	26	10
00913	4	150	-	176	80	26	10
00914	4	200	-	226	80	26	10
00915	4•	350	5+	382	100	32	10
00916	5	100	-	132	100	32	10
00917	5	150	-	182	100	32	10
00918	5	200	-	232	100	32	10
00919	5	350	-	382	100	32	10
00921	6	100	-	132	100	32	10
00922	6	150	-	182	100	32	10
00923	6	200	-	232	100	32	10
00924	6	350	-	382	100	32	10
00926	7	200	-	232	100	32	10
00928	8	100	-	132	100	32	10
00929	8	150	-	182	100	32	10
00930	8	200	-	232	100	32	10
00931	8	350	-	382	100	32	10
00933	10	100	-	138	120	38	10
00934	10	200	-	238	120	38	10
00937	12	200	-	238	120	38	5

• Overlength with reinforced blade.

Which drives are used for each individual product? Page 304

Nut driver with T-handle

Hexagon brilliant nickel-plated

336

Order-No.	⌀					
00965	5,5	125	157	100	32	10
00966	6	125	157	100	32	10
00967	6	200	232	100	32	10
00968	7	125	157	100	32	10
00969	7	200	232	100	32	10
00970	7	350	382	100	32	10
00971	8	125	157	100	32	10
00972	8	200	232	100	32	10
00973	8	350	382	100	32	10
00974	9	125	157	100	32	10
00975	9	200	232	100	32	10
00977	10	125	157	100	32	10
00978	10	200	232	100	32	10
00979	10	230	262	100	32	10
00980	10	350	382	100	32	10
00982	11	125	157	100	32	10
00983	11	230	262	100	32	5
00985	12	125	157	100	32	10
00986	12	230	262	100	32	5
00988	13	125	157	100	32	10
00989	13	230	262	100	32	10
00990	13	350	382	100	32	10
00991	14	125	157	100	32	5
00993	15	125	157	100	32	5
00994	16	125	157	100	32	5
00995	17	125	157	100	32	5

Nut driver with T-handle

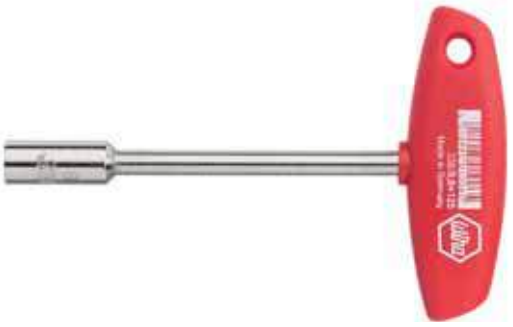

Square nickel-plated

338

Order-No.	⌀					
01005	6	125	157	100	32	10
01006	8	125	157	100	32	10
01007	10	125	157	100	32	10
01008	12	125	157	100	32	10

L-key with T-handle

Hex, inch design brilliant nickel-plated

334 Zoll

Order-No.	◉					mm	
02802	3/32	150	176	80	26	2,38	10
02803	7/64	150	176	80	26	2,78	10
02804	1/8	150	176	80	26	3,18	10
02805	9/64	150	176	80	26	3,57	10
02806	5/32	150	176	80	26	3,97	10
02807	3/16	150	182	100	32	4,76	10
02808	7/32	150	182	100	32	5,56	10
02809	1/4	150	182	100	32	6,35	10
02810	5/16	150	182	100	32	7,94	10
02811	3/8	150	188	120	38	9,53	10

L-key with T-handle electric

1000 V IEC 60900

Hex

334N

Order-No.	◉					
27928	4	150	176	80	26	10
27929	5	150	182	100	32	10
27930	6	150	182	100	32	10
27931	8	150	182	100	32	10

Manufactured acc. to IEC 60900.

Nut driver with T-handle

Hex, inch design brilliant nickel-plated

336 Zoll

Order-No.	O					mm	
02819	3/16	150	182	100	32	4,76	10
02820	1/4	150	182	100	32	6,35	10
02821	5/16	150	182	100	32	7,94	10
02822	3/8	150	182	100	32	9,53	10
02823	7/16	150	182	100	32	11,11	10
02824	1/2	150	182	100	32	12,70	10

Nut driver with T-handle electric

1000 V IEC 60900

Hex

336N

Order-No.	O					
27932	8	200	232	100	32	10
27933	10	230	262	100	32	10
27934	13	230	262	100	32	10
27935	17	230	268	120	38	10

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 304

L-key with T-handle

TORX® matt chrome-plated

364

Order-No.							
01328	T9	100	4,0	126	80	26	10
01329	T10	100	4,0	126	80	26	10
01330	T15	100	4,0	126	80	26	10
01331	T15	200	5,5	226	80	26	10
01332	T20	100	4,0	132	100	32	10
01333	T20	200	5,5	232	100	32	10
01334	T25	100	4,5	132	100	32	10
01335	T25	200	5,5	232	100	32	10
01336	T27	100	5,5	132	100	32	10
01337	T27	200	5,5	232	100	32	5
01338	T30	100	6,0	132	100	32	10
01339	T30	200	6,0	232	100	32	5
01340	T40	100	7,0	132	100	32	10
01341	T40	200	7,0	232	100	32	5
01343	T45	250	8,0	288	120	38	5
01345	T50	250	9,0	288	120	38	5

L-key with T-handle

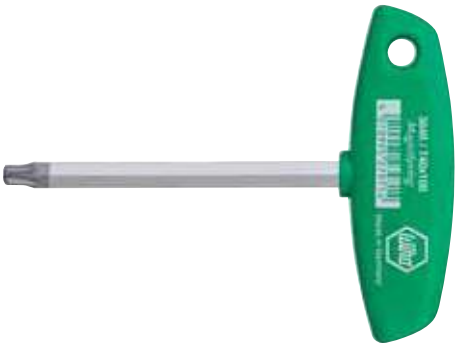

TORX® MagicSpring® matt chrome-plated

364R

Order-No.							
27964	T9	100	4,0	126	80	26	10
27965	T10	100	4,0	126	80	26	10
27966	T15	100	4,0	126	80	26	10
27967	T20	100	4,0	132	100	32	10
27968	T25	100	5,0	132	100	32	10
27969	T27	100	6,0	132	100	32	10
27970	T30	100	6,0	132	100	32	10
27971	T40	100	8,0	132	100	32	10

L-key with T-handle

TORX PLUS® matt chrome-plated

364IP

Order-No.							
26953	9IP	100	4,0	126	80	26	10
26954	10IP	100	4,0	126	80	26	10
26955	15IP	100	4,0	126	80	26	10
26956	20IP	100	4,0	132	100	32	10
26957	25IP	150	4,5	182	100	32	10
26958	27IP	150	5,5	182	100	32	10
26959	30IP	150	6,0	182	100	32	10
26960	40IP	150	7,0	182	100	32	10

L-key with key handle

Hex , black oxidised

331

Order-No.					
00894	1,5	60	95	40	10
00895	2	60	95	40	10
00896	2,5	60	95	40	10
00897	3	60	95	40	10

L-key with key handle

TORX®, black oxidised

365

Order-No.						
04918	T5	35	2,0	70	40	10
01350	T6	35	2,0	70	40	10
01351	T7	35	2,5	70	40	10
01352	T8	40	2,5	75	40	10
01353	T9	40	3,0	75	40	10
01354	T10	40	3,0	75	40	10
01355	T15	45	3,5	80	40	10
01356	T20	45	4,0	80	40	10

L-key with key handle

TORX PLUS®, black oxidised

365IP

Order-No.						
26181	5IP	35	2,0	70	40	10
26182	6IP	35	2,0	70	40	10
26183	7IP	35	2,5	70	40	10
26184	8IP	40	2,5	75	40	10
26185	9IP	40	3,0	75	40	10
26186	10IP	40	3,0	75	40	10
26187	15IP	45	3,5	80	40	10
26188	20IP	45	4,0	80	40	10

L-key with flag handle

TORX®, black oxidised

370

Order-No.						
03724	T5	35	2,0	62	15	10
03725	T6	35	2,0	62	15	10
03726	T7	35	2,5	67	19	10
03727	T8	40	2,5	72	19	10
03728	T9	40	3,0	74	24	10
03729	T10	40	3,0	74	24	10
03730	T15	45	3,5	80	28	10
03731	T20	45	4,0	80	28	10

L-key with flag handle

TORX PLUS®, black oxidised

370IP

Order-No.						
27614	5IP	35	2,0	67	15	10
27615	6IP	35	2,0	67	15	10
27616	7IP	35	2,5	67	19	10
27617	8IP	40	2,5	72	19	10
27618	9IP	40	3,0	74	24	10
27619	10IP	40	3,0	74	24	10
27620	15IP	45	3,5	80	28	10
27621	20IP	45	4,0	80	28	10

Which drives are used for each individual product? Page 304

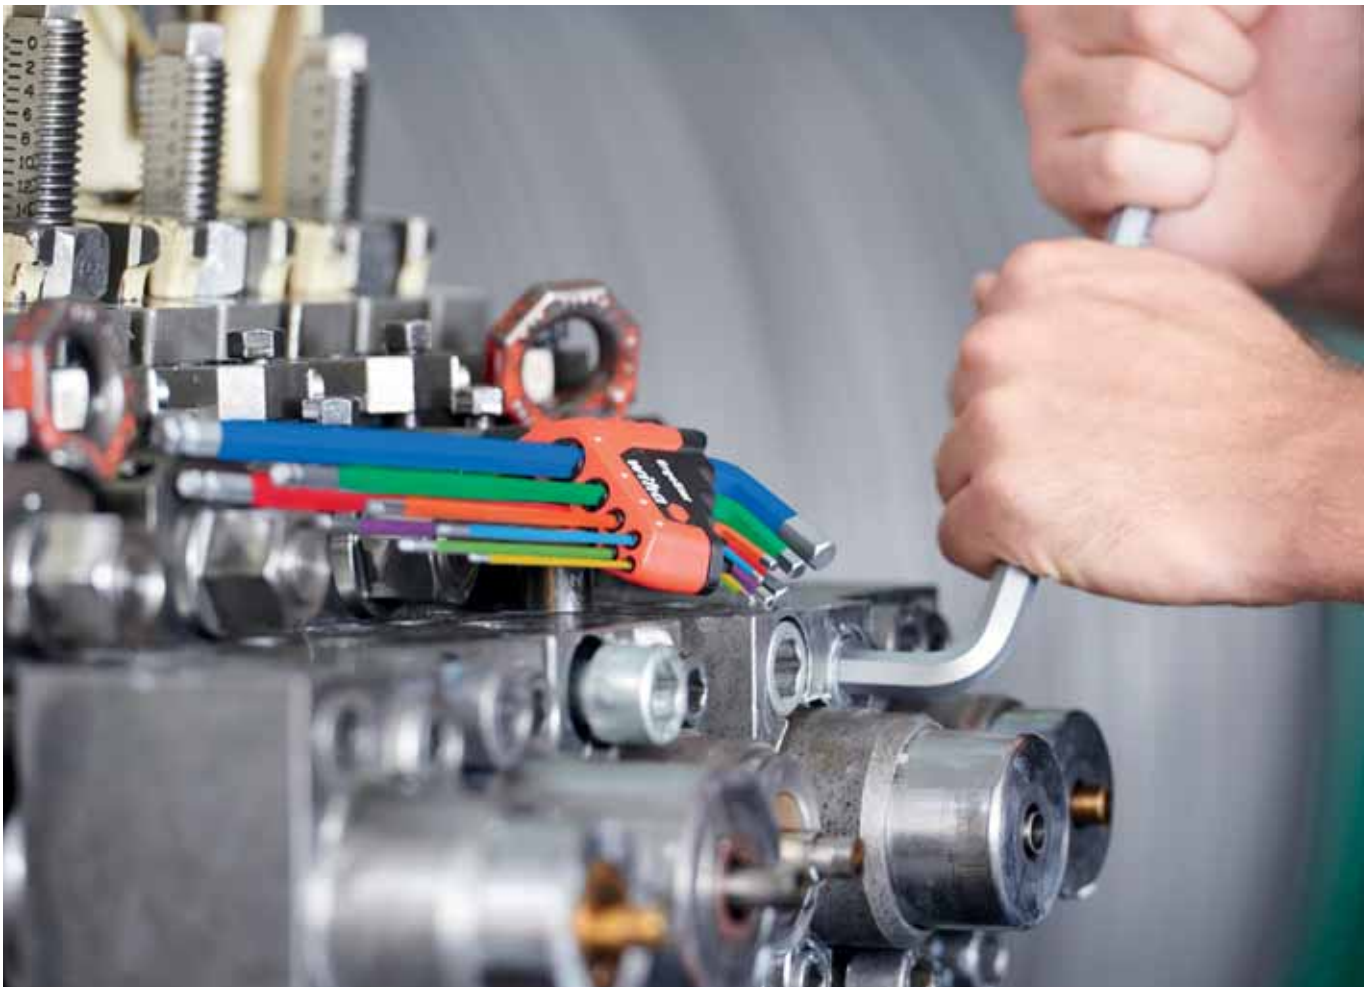

Bits
The indispensable three.

Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use.

Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening Y-shaped screws with an angle no greater than 90° between the thread and screw head. The T bit is used for T-shaped screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

A selection of different bit holders and bit boxes such as the BitBuddy® and XLSelector ensures optimum usage of bits.

Application	Bits			
For all screw types	**BitBuddy® TY bit set, 49 mm** Page 222 	**BitBuddy® TY bit set, 29 mm** Page 223 	**TY bit set 49 mm** Page 222 	**TY bit set 29 mm** Page 224
For T-shaped screws	**XLSelector T bit set, 50 mm** Page 224 	**FlipSelector T bit set, 25 mm** Page 225 	**T bit set, 50 mm** Page 225 	**T bit set, 25 mm** Page 225
For Y-shaped screws	**XLSelector Y bit set, 50 mm** Page 226 	**FlipSelector Y bit set, 25 mm** Page 227 	**Y bit set, 50 mm** Page 226 	**Y bit set, 25 mm** Page 226
For universal focus	**Bit set XLSelector Standard 25 mm assorted 1/4" 31-pcs.** Page 227 	**Bit set FlipSelector Standard 25 mm assorted 1/4" 13-pcs.** Page 228 	**Bit Standard 25 mm 1/4"** Page 231 	**Bit Professional 1/4"** Page 236
MicroBits	**Micro-bit set ESD assorted 65-pcs.** Page 241 	**Micro-bit 28 mm Slotted drive 4 mm** Page 241 		
Bit holder	**Bit holder CentroFix Force mechanically lockable 1/4", magnetic** Page 246 	**Bit holder CentroFix Super Slim mechanically lockable 1/4", magnetic** Page 246 	**Bit holder MagicFlip Force magnetic with ring magnet, 1/4"** Page 246 	**Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable 1/4"** Page 248
Special solutions	**High-performance offset screwdriver with quick release holder 1/4"** Page 249 	**Wood drill bit 1/4"** Page 243 	**Countersink bit 1/4"** Page 244 	

BitBuddy® TY bit set, 49 mm

Pozidriv 1/4" 7-pcs. — SB 7946-TY202

Order-No.		
42099		6

1 x PZ1 / 5 x PZ2 / 1 x PZ3

•compared to Wiha standard bit

TORX® 1/4" 7-pcs. — SB 7946-TY505

Order-No.		
42115		6

1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40

•compared to Wiha standard bit

Hexagon 1/4" 7-pcs. — SB 7946-TY303

Order-No.		
42114		6

2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 7-pcs., 1/4" — SB 7946-TY903

Order-No.		
42116		6

1 x PH2

1 x PZ3 / 1 x PZ1 / 1 x PZ2

1 x T15 / 1 x T20 / 1 x T25

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 7-pcs., 1/4" — SB 7946-TY904

Order-No.		
42117		6

1 x PH2

1 x PZ1 / 1 x PZ2

1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

•compared to Wiha standard bit

Pozidriv, TORX® 7-pcs. 1/4" in box — SB 7946-TY905

Order-No.		
42118		6

1 x PZ2 / 1 x PZ3

1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40

•compared to Wiha standard bit

TY bit set 49 mm

Order-No.		
42097	5 x PH1	6
42119	5 x PH2	6
42120	5 x PH3	6
42121	5 x PZ1	6
42122	5 x PZ2	6
42123	5 x PZ3	6
42124	5 x SW3	6
42125	5 x SW4	6
42126	5 x SW5	6
42127	5 x SW6	6
42128	5 x T10	6
42129	5 x T15	6
42130	5 x T20	6
42131	5 x T25	6
42132	5 x T27	6
42133	5 x T30	6
42134	5 x T40	6

•compared to Wiha standard bit

INFOBOX:
BitBuddy 29

Easy, single-hand operation.

Attaching:

- Bits are directly picked up with the machine from the BitBuddy.

Work:

- Gets your fastenings done.

Storing

- Bits are easily returned to the BitBuddy, by pressing on the red bit strip.
- With magnetic bit holder for a rapid bit change.
- BitBuddy is always at hand - easily fits into trouser pockets or onto the belt clip.

Which drives are used for each individual product? Page 304

BitBuddy® TY bit set, 29 mm

Pozidriv 1/4" 8-pcs.

SB 7945-TY202

Order-No.	
42098	6
1 x PZ1 / 5 x PZ2 / 1 x PZ3	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

TORX® 1/4" 8-pcs.

SB 7945-TY505

Order-No.	
42136	6
1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Hexagon 8-pcs. 1/4"

SB 7945-TY303

Order-No.	
42135	6
2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY903

Order-No.	
42137	6
1 x PH2	
1 x PZ1 / 1 x PZ2 / 1 x PZ3	
1 x T15 / 1 x T20 / 1 x T25	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY904

Order-No.	
42138	6
1 x PH2	
1 x PZ1 / 1 x PZ2	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY905

Order-No.	
42139	6
1 x PZ2 / 1 x PZ3	
1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

INFOBOX:

Wiha TY bit concept

- Bits quickly and easily selected thanks to the screw head shape.
- The T bit is ideal for fastening T-shaped screws with an angle of 90°.
- The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.
- Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

Wiha Bitfinder

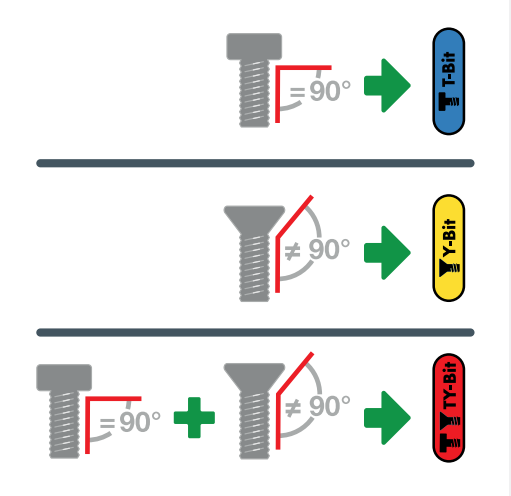

TY bit set 29 mm

Order-No.		
42096	5 x PH1	6
42100	5 x PH2	6
42101	5 x PH3	6
42149	5 x PZ1	6
42102	5 x PZ2	6
42103	5 x PZ3	6
42104	5 x SW3	6
42105	5 x SW4	6
42106	5 x SW5	6
42107	5 x SW6	6
42108	5 x T10	6
42109	5 x T15	6
42110	5 x T20	6
42111	5 x T25	6
42112	5 x T27	6
42113	5 x T30	6
42150	5 x T40	6

•compared to Wiha standard bit

XLSelector T bit set, 50 mm

Phillips, TORX®, hex 13-pcs. 1/4" **SB 7948-T950**

Order-No.	
41831	6
	1 x PH1 / 1 x PH2 / 1 x PH3
	1 x SW3 / 1 x SW4 / 1 x SW5 / 1 x SW6
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic extra strong magnet, 1/4"

•compared to Wiha standard bit

XLSelector T bit set, 25 mm

Phillips, TORX®, hex 31-pcs. 1/4" **SB 7948-T999**

Order-No.	
41830	6
	2 x PH1 / 4 x PH2 / 2 x PH3
	2 x SW3 / 2 x SW4 / 2 x SW5 / 2 x SW6
	2 x T10 / 2 x T15 / 4 x T20 / 2 x T25 / 2 x T30 / 2 x T40
	1 x Bit holder magnetic extra strong magnet, 1/4"

•compared to Wiha standard bit

Which drives are used for each individual product? Page 304

FlipSelector T bit set, 25 mm

Hexagon 16-pcs. 1/4"

SB 7947-T303

Order-No.		
41825		6
	3 x SW3 / 3 x SW4 / 3 x SW5 / 3 x SW6	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

SB 7947-T906

Order-No.		
41824		6
	1 x PH1 / 3 x PH2 / 1 x PH3	
	1 x PZ2	
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

assorted 1/4" 13-pcs.

SB 7947-T999

Order-No.		
41826		6
	1 x PH1 / 1 x PH2 / 1 x PH3	
	1 x PZ2	
	1 x SW4 / 1 x SW5 / 1 x SW6	
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

T bit set, 50 mm

Order-No.		
41637	5 x PH1	6
41638	5 x PH2	6
41639	5 x PH3	6
41640	5 x PZ1	6
41641	5 x PZ2	6
41642	5 x PZ3	6
41650	5 x SW3	6
41651	5 x SW4	6
41652	5 x SW5	6
41653	5 x SW6	6
41643	5 x T10	6
41644	5 x T15	6
41645	5 x T20	6
41646	5 x T25	6
41647	5 x T27	6
41648	5 x T30	6
41649	5 x T40	6
41660	5 x #1	6
41662	5 x #2	6
41663	5 x #3	6

•compared to Wiha standard bit

T bit set, 25 mm

Order-No.		
41598	5 x PH1	6
41599	5 x PH2	6
41600	5 x PH3	6
41601	5 x PZ1	6
41602	5 x PZ2	6
41603	5 x PZ3	6
41611	5 x SW3	6
41612	5 x SW4	6
41613	5 x SW5	6
41614	5 x SW6	6
41604	5 x T10	6
41605	5 x T15	6
41606	5 x T20	6
41607	5 x T25	6
41608	5 x T27	6
41609	5 x T30	6
41610	5 x T40	6
41621	5 x #1	6
41622	5 x #2	6
41623	5 x #3	6

•compared to Wiha standard bit

XLSelector Y bit set, 50 mm

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" SB 7948-Y950

Order-No.		
41834		6
⊕	2 x PH2	
✳	1 x PZ1 / 2 x PZ2 / 1 x PZ3	
✱	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
○	1 x Bit holder magnetic extra strong magnet, 1/4"	

•compared to Wiha standard bit

XLSelector Y bit set, 25 mm

TORX® 31-pcs. 1/4" SB 7948-Y505

Order-No.		
41833		6
✱	3 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 6 x T30 / 3 x T40	
○	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 31-pcs., 1/4" SB 7948-Y904

Order-No.		
41832		6
⊕	1 x PH1 / 1 x PH3 / 4 x PH2	
✳	2 x PZ1 / 4 x PZ2 / 2 x PZ3	
✱	2 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T30 / 2 x T40	
○	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Y bit set, 50 mm

Order-No.		
41624	⊕ 5 x PH1	6
41625	⊕ 5 x PH2	6
41626	⊕ 5 x PH3	6
41627	✳ 5 x PZ1	6
41628	✳ 5 x PZ2	6
41629	✳ 5 x PZ3	6
41630	✱ 5 x T10	6
41631	✱ 5 x T15	6
41632	✱ 5 x T20	6
41633	✱ 5 x T25	6
41634	✱ 5 x T27	6
41635	✱ 5 x T30	6
41636	✱ 5 x T40	6

•compared to Wiha standard bit

Y bit set, 25 mm

Order-No.		
41585	⊕ 5 x PH1	6
41586	⊕ 5 x PH2	6
41587	⊕ 5 x PH3	6
41588	✳ 5 x PZ1	6
41589	✳ 5 x PZ2	6
41590	✳ 5 x PZ3	6
41591	✱ 5 x T10	6
41592	✱ 5 x T15	6
41593	✱ 5 x T20	6
41594	✱ 5 x T25	6
41595	✱ 5 x T27	6
41596	✱ 5 x T30	6
41597	✱ 5 x T40	6

•compared to Wiha standard bit

Which drives are used for each individual product? Page 304

FlipSelector Y bit set, 25 mm

Pozidriv 1/4" 13-pcs.

SB 7947-Y202

Order-No.	
41829	6
2 x PZ1 / 8 x PZ2 / 2 x PZ3	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

TORX® 1/4" 13-pcs.

SB 7947-Y505

Order-No.	
41828	6
2 x T10 / 2 x T15 / 3 x T20 / 2 x T25 / 2 x T30 / 1 x T40	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

SB 7947-Y904

Order-No.	
41827	6
2 x PH2	
1 x PZ1 / 2 x PZ2 / 1 x PZ3	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Belt clip

for bit set BitBuddy® and FlipSelector

7945

Order-No.	
36990	10

Bit set XLSelector Standard 25 mm

assorted with bit ratchet form C 6.3 (1/4"), 17-pcs.

7948-043

Order-No.	
36951	5
1 x PH1 / 1 x PH2	
1 x PZ1 / 1 x PZ2 / 1 x PZ3	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x 3,0 / 1 x 4,0 / 1 x 5,0 / 1 x 6,0	
1 x Bit holder magnetic, 58 mm 1/4"	
1 x Bit ratchet 90 mm with thumb wheel Hexagon head, 1/4" in blister pack	

Bit set XLSelector Standard 25 mm

assorted 1/4" 31-pcs.

7948-005

Order-No.	
29417	5
1 x 4,5 / 1 x 5,5 / 1 x 6,5	
2 x PH1 / 4 x PH2 / 1 x PH3	
2 x PZ1 / 5 x PZ2 / 1 x PZ3	
2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40	
1 x Bit holder magnetic, 58 mm 1/4"	

assorted 1/4" 31-pcs.

7948-927

Order-No.	
29416	5
1 x 0 / 1 x 1 / 1 x 2 / 1 x 3 / 1 x 4	
1 x 4 / 1 x 6 / 1 x 8 / 1 x 10	
1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x TR4,0 / 1 x TR5,0 / 1 x TR6,0	
1 x 6 / 1 x 8 / 1 x 10	
1 x T8H / 1 x T9H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H	
1 x #1 / 1 x #2 / 1 x #3	
1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetisch	

Bit set FlipSelector Standard 25 mm

assorted 1/4" 13-pcs. — 7947-999

Order-No.	
39078	10
	1 x 5,5
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
	1 x 3,0 / 1 x 4,0 / 1 x 5,0
	1 x Bit holder magnetic, 58 mm 1/4"

Slotted, Phillips, Pozidriv 1/4" 13-pcs. — 7947-005

Order-No.	
39029	10
	1 x 5,5
	1 x PH1 / 3 x PH2 / 1 x PH3
	1 x PZ1 / 4 x PZ2 / 1 x PZ3
	1 x Bit holder magnetic, 58 mm 1/4"

Pozidriv, TORX® 1/4" 13-pcs. — 7947-904

Order-No.	
39040	10
	2 x PH2
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

Pozidriv, TORX® 1/4" 13-pcs. — 7947-905

Order-No.	
39041	10
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

TORX® 1/4" 13-pcs. — 7947-505

Order-No.	
39124	10
	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

TORX® Tamper Resistant (with hole) 1/4" 13-pcs. — 7947-505TR

Order-No.	
39037	10
	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H
	1 x Bit holder magnetic, 58 mm 1/4"

Hexagon 1/4" 11-pcs. — 7947-902

Order-No.	
39039	10
	1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 2 x 3,0 / 2 x 4,0 / 1 x 5,0 / 1 x 6,0 / 1 x 8,0
	1 x Bit holder magnetic, 58 mm 1/4"

SIT (for Assy® and Pias screws), 13-pcs., 1/4" — 7947-995

Order-No.	
39045	10
	2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40
	1 x Bit holder magnetic, 58 mm 1/4"

Bit set FlipSelector Standard 25 mm

Slotted, Phillips, Pozidriv, 13-pcs., 1/4" with belt clip, in blister pack — SB 7947-005

Order-No.	
39049	5
	1 x 5,5
	1 x PH1 / 3 x PH2 / 1 x PH3
	1 x PZ1 / 4 x PZ2 / 1 x PZ3
	1 x Bit holder magnetic, 58 mm 1/4"

TORX®, 13-pcs., 1/4" with belt clip, in blister pack — SB 7947-505

Order-No.	
39056	5
	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

TORX® Tamper Resistant (with drill hole), 13-pcs., 1/4" with belt clip, in blister pack — SB 7947-505TR

Order-No.	
39057	5
	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H
	1 x Bit holder magnetic, 58 mm 1/4"

Which drives are used for each individual product? Page 304

Hex, 11-pcs., 1/4" with belt clip in blister pack SB 7947-902

Order-No.	
39059	5
	1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 2 x 3,0 / 2 x 4,0 / 1 x 5,0 / 1 x 6,0 / 1 x 8,0
	1 x Bit holder magnetic, 58 mm 1/4"

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" with belt clip, in blister pack SB 7947-904

Order-No.	
39060	5
	2 x PH2
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

Phillips, Pozidriv, TORX®, 14-pcs., 1/4" with belt clip, in blister pack SB 7947-905

Order-No.	
39061	5
	1 x PH2
	2 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

SIT (for Assy® and Pias screws), 1/4",13-pcs. with belt clip in blister pack SB 7947-995

Order-No.	
39082	5
	2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40
	1 x Bit holder magnetic, 58 mm 1/4"

Mixed, 1/4", 13-pcs. with belt clip in blister pack SB 7947-999

Order-No.	
39083	5
	1 x 5,5
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
	1 x 3,0 / 1 x 4,0 / 1 x 5,0
	1 x Bit holder magnetic, 58 mm 1/4"

Bit set Collector Standard 25 mm

assorted 1/4" 32-pcs. 7928-913

Order-No.	
34686	5
	1 x 4,5 / 1 x 5,5 / 1 x 6,5
	2 x PH1 / 5 x PH2 / 2 x PH3
	2 x PZ1 / 5 x PZ2 / 2 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic
	1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"

Bit set Collector Standard 25 mm

assorted 1/4" 61-pcs. 7928-923

Order-No.	
07943	5
	1 x 4,5 / 1 x 5,5 / 1 x 6,5 / 1 x 8,0
	7 x PH1 / 13 x PH2 / 3 x PH3
	7 x PZ1 / 13 x PZ2 / 3 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 3,0 / 1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic

Bit set Collector Security Standard 25 mm and torsion bits

assorted 1/4" 27-pcs. **7928-928**

Order-No.	
09393	5
	1 x T8H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H
	1 x 6 / 1 x 8 / 1 x 10
	1 x 1 / 1 x 2 / 1 x 3 / 1 x 4
	1 x 4 / 1 x 6 / 1 x 8 / 1 x 10
	1 x TR5/64 / 1 x TR3/32 / 1 x TR7/64 / 1 x TR1/8 / 1 x TR9/64 / 1 x TR5/32
	1 x Bit holder magnetic extra strong magnet, 1/4"
	1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"

Bit set Standard 25 mm

assorted, 31-pcs. in box, 1/4" **7979-01**

Order-No.	
26252	1
	1 x 4,5 / 1 x 5,5 / 1 x 6,5
	2 x PH1 / 6 x PH2 / 1 x PH3
	2 x PZ1 / 6 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder magnetic extra strong magnet 1/4"

TORX®, Pozidriv 1/4" 31-pcs. **7979-02**

Order-No.	
26253	1
	5 x PZ1 / 10 x PZ2 / 3 x PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30 / 2 x T40
	1 x Bit holder magnetic extra strong magnet 1/4"

TORX®, Pozidriv 1/4" 31-pcs. **7979-03**

Order-No.	
36310	1
	2 x PZ1 / 3 x PZ2 / 1 x PZ3
	2 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 2 x T30 / 2 x T40
	1 x Bit holder magnetic extra strong magnet 1/4"

Which drives are used for each individual product? Page 304

Slotted 1/4"

7010 Z

Order-No.	⊖	mm	⊖	
01623	4,5	25	0,6	10
01624	5,5	25	0,8	10
01626	6,5	25	1,2	10
01627	8,0	25	1,6	10

Phillips 1/4"

7011 Z

Order-No.	⊕	mm	
05298	PH0	25	10
01657	PH1	25	10
01658	PH2	25	10
01659	PH3	25	10
01649	PH4	32	10

Pozidriv 1/4"

7012 Z

Order-No.	⊕	mm	
05300	PZ0	25	10
01688	PZ1	25	10
01689	PZ2	25	10
01690	PZ3	25	10
01681	PZ4	32	10

TORX® 1/4"

7015 Z

Order-No.	✱	mm	
26250	T3	25	10
25097	T4	25	10
01711	T5	25	10
01712	T6	25	10
01713	T7	25	10
01714	T8	25	10
01715	T9	25	10
01716	T10	25	10
01717	T15	25	10
01718	T20	25	10
01719	T25	25	10
01720	T27	25	10
01721	T30	25	10
01722	T40	25	10
01723	T45	35	10
01724	T50	35	10

TORX® conical 1/4"

7015K Z

Order-No.	✱	mm	
04925	T10	25	10
04926	T15	25	10
04927	T20	25	10
04928	T25	25	10
04929	T27	25	10
04930	T30	25	10
04931	T40	25	10

TORX PLUS® 1/4"

7016 Z

Order-No.	✱	mm	
25994	3IP	25	10
25996	4IP	25	10
25998	5IP	25	10
23173	6IP	25	10
23175	7IP	25	10
23177	8IP	25	10
23179	9IP	25	10
23181	10IP	25	10
23183	15IP	25	10
23185	20IP	25	10
23187	25IP	25	10
23189	27IP	25	10
23191	30IP	25	10
23193	40IP	25	10

TORX® Tamper Resistant (with hole) 1/4"

7015 Z TR

Order-No.	✱	mm	
03115	T7H	25	10
03117	T8H	25	10
01726	T9H	25	10
01727	T10H	25	10
01728	T15H	25	10
01729	T20H	25	10
01730	T25H	25	10
01731	T27H	25	10
01732	T30H	25	10
01733	T40H	25	10

TORX PLUS® Security, 1/4"

7016 Z IPR

Order-No.		mm	
27530	8IPR	25	10
26346	10IPR	25	10
26347	15IPR	25	10
26348	20IPR	25	10
26349	25IPR	25	10
26350	30IPR	25	10
26351	40IPR	35	10

MagicRing® hexagonal ball end, 1/4"

7017R Z

Order-No.		mm	
22959	3,0	38	10
22960	4,0	38	10
22961	5,0	38	10
22962	6,0	38	10

Hexagonal ball end 1/4"

7017 Z

Order-No.		mm	
01734	1,5	38	10
01735	2,0	38	10
01736	2,5	38	10
01737	3,0	38	10
01738	4,0	38	10
01739	5,0	38	10
01740	6,0	38	10

MagicRing® hex 1/4"

7013R Z

Order-No.		mm	
22955	3,0	25	10
22956	4,0	25	10
22957	5,0	25	10
22958	6,0	25	10

Hexagon 1/4"

7013 Z

Order-No.		mm	
04011	1,5	25	10
01703	2,0	25	10
01704	2,5	25	10
01705	3,0	25	10
01706	4,0	25	10
01707	5,0	25	10
39875	5,5	25	10
01708	6,0	25	10
01709	8,0	25	10
01710	10,0	25	10

Internal square 1/4"

7018 Z

Order-No.			mm	
06634	#1	2,3	25	5
06635	#2	2,8	25	5
06636	#3	3,3	25	5

Hexagon with hole 1/4"

7013 Z TR

Order-No.		mm	
25560	TR2,0	25	10
25561	TR2,5	25	10
25562	TR3,0	25	10
25563	TR4,0	25	10
25564	TR5,0	25	10
26309	TR6,0	25	10
20558	TR5/64	25	10
20556	TR3/32	25	10
20559	TR7/64	25	10
20555	TR1/8	25	10
20560	TR9/64	25	10
20557	TR5/32	25	10
30050	TR3/16	25	10

Spanner 1/4"

7019 Z SP

Order-No.		mm	
27064	4	25	10
27065	6	25	10
27066	8	25	10
27067	10	25	10

Triple square 1/4"

7019 Z XZN

Order-No.		mm	
26352	M3	25	10
26353	M4	25	10
26354	M5	25	10
26355	M6	25	10
26356	M8	35	10

SIT 1/4"

7019 Z SIT

Order-No.		mm		
27256	SIT 10	25	pink	10
27257	SIT 20	25	orange	10
27258	SIT 25	25	grün	10
27259	SIT 30	25	gelb	10
27260	SIT 40	25	rosa	10

Torq-Set® 1/4"

7019 Z TS

Order-No.		mm	
27030	0	25	10
27028	1	25	10
26249	2	25	10
26045	3	25	10
22591	4	25	10
22592	5	25	10
22593	6	25	10
22594	8	25	10
22595	10	25	10
25572	1/4	32	10

Which drives are used for each individual product? Page 304

Tri-Wing® 1/4" — 7019 Z TW

Order-No.		mm	
22603	0	25	10
22604	1	25	10
22605	2	25	10
22606	3	25	10
22607	4	25	10
22608	5	25	10

Bit DryWall Stop Standard 25 mm

Phillips 1/4" — 7011 DWS

Order-No.		mm	
39382	PH2	25	10

INFOBOX: Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX: MagicRing®

Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

INFOBOX: TORX® tamper-resistant safety profile

- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

Bit set Standard 25 mm

Order-No.		
32055	10 x PH1	10
07855	3 x PH1	10
36275	20 x PH2	10
24733	10 x PH2	10
07856	3 x PH2	10
36280	10 x PH3	10
07857	3 x PH3	10
07858	1 x PH1 1 x PH2 1 x PH3	10
35709	20 x PZ1	10
32070	10 x PZ1	10
07859	3 x PZ1	10
36282	20 x PZ2	10
24742	10 x PZ2	10
07860	3 x PZ2	10
32071	10 x PZ3	10
07861	3 x PZ3	10
20542	1 x PZ4	10
07862	1 x PZ1 1 x PZ2 1 x PZ3	10
35832	10 x T10	10
08421	2 x T10	10
34746	10 x T15	10
08422	2 x T15	10
24746	10 x T20	10
08423	2 x T20	10
08424	2 x T25	10
24748	10 x T25	10
26451	2 x T27	10
08425	2 x T30	10
08426	2 x T40	10
36288	10 x T40	10
38649	2 x T10H	10
38650	2 x T15H	10
38651	2 x T20H	10
38652	2 x T25H	10
38653	2 x T30H	10
38654	2 x T40H	10
22651	1 x 2,0 1 x 2,5 1 x 3,0	10
22653	1 x 3,0 1 x 4,0 1 x 5,0	10
22655	1 x 4,0 1 x 5,0 1 x 6,0	10
07865	1 x 2,0 1 x 2,5 1 x 3,0	10
07866	1 x 4,0 1 x 5,0 1 x 6,0	10
38656	2 x 3,0	10
25681	2 x 4,0	10
25679	2 x 5,0	10
38657	2 x 6,0	10
38658	2 x #1 x 2,3	10
38659	2 x #2 x 2,8	10
38660	2 x #3 x 3,3	10
38661	1 x #1 x 2,3 2 x #2 x 2,8 3 x #3 x 3,3	10

Standard bit reduced diameter: 25 mm

Order-No.		
35834	10 x PH2	10
36285	10 x PZ2	10

Which drives are used for each individual product? Page 304

Bit set DryWall Stop 25 mm

Phillips, 2-pcs. in box, 1/4"

7011 DWS

Order-No.	
27077	1
PH2 x 25	

Bit set Standard 25 mm

Phillips (PH1), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08047	1
PH1 x 25	

Phillips (PH2), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08048	1
PH2 x 25	

Phillips (PH3), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08049	1
PH3 x 25	

Pozidriv (PZ1), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08056	1
PZ1 x 25	

Pozidriv (PZ2), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08057	1
PZ2 x 25	

Pozidriv (PZ3), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08058	1
PZ3 x 25	

TORX® (T10), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08065	1
T10 x 25	

TORX® (T15), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08066	1
T15 x 25	

TORX® (T20), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08067	1
T20 x 25	

TORX® (T25), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08068	1
T25 x 25	

TORX® (T27), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
29544	1
T27 x 25	

TORX® (T30), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08069	1
T30 x 25	

TORX® (T40), 50-pcs. in bulk pack, 1/4"

7929 Z

Order-No.	
08070	1
T40 x 25	

Bit set Standard 25 mm

Phillips (PH2), 100-pcs. in bulk pack, 1/4" — 7930 Z

Order-No.	
40461	1
PH2 x 25	

Pozidriv (PZ2), 100-pcs. in bulk pack, 1/4" — 7930 Z

Order-No.	
40462	1
PZ2 x 25	

TORX® (T20), 100-pcs. in bulk pack, 1/4" — 7930 Z

Order-No.	
40463	1
T20 x 25	

TORX® (T25), 100-pcs. in bulk pack, 1/4" — 7930 Z

Order-No.	
40464	1
T25 x 25	

TORX® (T30), 100-pcs. in bulk pack, 1/4" — 7930 Z

Order-No.	
40465	1
T30 x 25	

Bit Professional

Slotted 1/4" — 7040 Z

Order-No.	⊖	mm	⊖	
33961	2,5	70	0,4	5
01790	3,0	50	0,5	5
33962	3,0	70	0,5	5
01792	3,5	50	0,6	5
33963	3,5	70	0,6	5
01791	4,0	50	0,5	5
01794	4,0	50	0,8	5
33964	4,0	70	0,8	5
01793	4,5	50	0,6	5
01795	5,5	50	0,8	5
01796	5,5	50	1,0	5
33965	5,5	70	1,0	5
01798	6,5	50	1,2	5
33966	6,5	70	1,2	5
01799	8,0	50	1,2	5
01800	8,0	50	1,6	5

Phillips 1/4" — 7041 Z

Order-No.	⊕	mm	
31960	PH00	50	5
31961	PH00	70	5
31962	PH00	90	5
32105	PH0	50	5
35456	PH0	70	5
35457	PH0	90	5
33703	PH1	50	5
01803	PH1	70	5
04126	PH1	90	5
23213	PH1	110	5
23219	PH1	127	5
22509	PH1	150	5
33704	PH2	50	5
01805	PH2	70	5
04009	PH2	90	5
05800	PH2	110	5
06888	PH2	127	5
22510	PH2	150	5
33705	PH3	50	5
04010	PH3	70	5
04127	PH3	90	5
23215	PH3	110	5
23217	PH3	127	5
22511	PH3	150	5

Which drives are used for each individual product? Page 304

Pozidriv 1/4"

7042 Z

Order-No.		mm	
31957	PZ0	50	5
31958	PZ0	70	5
31959	PZ0	90	5
33706	PZ1	50	5
01808	PZ1	70	5
01809	PZ1	90	5
23221	PZ1	110	5
23225	PZ1	127	5
23227	PZ1	150	5
33707	PZ2	50	5
01811	PZ2	70	5
01812	PZ2	90	5
05799	PZ2	110	5
06889	PZ2	127	5
23228	PZ2	150	5
33708	PZ3	50	5
04059	PZ3	70	5
04176	PZ3	90	5
23223	PZ3	110	5
23226	PZ3	127	5
22512	PZ3	150	5

PlusMinus/Phillips 1/4"

7049XH

Order-No.		mm	
32490	SL/PH1	50	5
32491	SL/PH1	70	5
32686	SL/PH1	90	5
32492	SL/PH2	50	5
32493	SL/PH2	70	5
32687	SL/PH2	90	5

PlusMinus/Pozidriv 1/4"

7049XZ

Order-No.		mm	
32494	SL/PZ1	50	5
32495	SL/PZ1	70	5
32688	SL/PZ1	90	5
32496	SL/PZ2	50	5
32497	SL/PZ2	70	5
32689	SL/PZ2	90	5

TORX® ball end 1/4"

7045BE

Order-No.		mm	
32409	T9	50	5
32410	T10	50	5
32416	T10	70	5
32417	T15	50	5
32418	T15	70	5
32411	T20	50	5
32419	T20	70	5
32412	T25	50	5
32421	T25	70	5
32413	T27	50	5
32414	T30	50	5
32423	T30	70	5
32415	T40	50	5

TORX® MagicSpring® 1/4"

7045R

Order-No.		mm	
34452	T10	50	5
34453	T15	50	5
34454	T20	50	5
34455	T25	50	5
34456	T30	50	5
34457	T40	50	5

TORX® 1/4"

7045 Z

Order-No.		mm	
39184	T1	50	5
39185	T2	50	5
39186	T3	50	5
39187	T4	50	5
32299	T5	50	5
32302	T6	50	5
33709	T6	70	5
33717	T6	90	5
38370	T6	150	5
32303	T7	50	5
33710	T7	70	5
33718	T7	90	5
38371	T7	150	5
32304	T8	50	5
33711	T8	70	5
33719	T8	90	5
36327	T8	150	5
32305	T9	50	5
33712	T9	70	5
33720	T9	90	5
38372	T9	150	5
32306	T10	50	5
33713	T10	70	5
33721	T10	90	5
33725	T10	110	5
33726	T10	150	5
32307	T15	50	5
33714	T15	70	5
33722	T15	90	5
33727	T15	110	5
33728	T15	150	5
32308	T20	50	5
33715	T20	70	5

33723	T20	90	5
33729	T20	110	5
33730	T20	150	5
32309	T25	50	5
33716	T25	70	5
33724	T25	90	5
33731	T25	110	5
33732	T25	150	5
33920	T27	50	5
33921	T27	70	5
33922	T27	90	5
33923	T30	50	5
33924	T30	70	5
33925	T30	90	5
33926	T30	110	5
33927	T30	150	5
33928	T40	50	5
33929	T40	70	5
33930	T40	90	5
33931	T40	110	5
33932	T40	150	5

TORX® Tamper Resistant (with hole) 1/4"

7045 Z TR

Order-No.		mm	
21045	T7H	50	5
21047	T8H	50	5
20218	T9H	50	5
20219	T10H	50	5
39188	T10H	90	5
24867	T15H	50	5
39189	T15H	90	5
20220	T20H	50	5
39190	T20H	90	5
20221	T25H	50	5
39191	T25H	90	5
20222	T27H	50	5
39192	T27H	90	5
20223	T30H	50	5
39193	T30H	90	5
20224	T40H	50	5
39194	T40H	90	5

TORX PLUS® 1/4"

7046 Z

Order-No.		mm	
39195	1IP	50	5
39196	2IP	50	5
32486	3IP	50	5
39197	4IP	50	5
39198	4IP	90	5
28481	5IP	50	5
39199	5IP	90	5
31973	6IP	90	5
26000	6IP	50	5
26002	7IP	50	5
23195	8IP	50	5
31975	8IP	90	2
23197	9IP	50	5
23199	10IP	50	5
31977	10IP	90	5
23201	15IP	50	5
25553	15IP	90	5
23203	20IP	50	5
39200	20IP	90	5
23205	25IP	50	5
39201	25IP	90	5
23207	27IP	50	5
39202	27IP	90	5
23209	30IP	50	5
39203	30IP	90	5
23211	40IP	50	5
39204	40IP	90	5

Hexagonal ball end 1/4"

7047R Z

Order-No.		mm	
25739	3,0	50	5
25740	4,0	50	5
25741	5,0	50	5
25742	6,0	50	5

MagicRing® hex 1/4"

7043R Z

Order-No.		mm	
23145	3,0	50	5
23147	4,0	50	5
23149	5,0	50	5
23151	6,0	50	5

Which drives are used for each individual product? Page 304

Hexagon 1/4"

7043 Z

Order-No.		mm	
05301	1,5	50	5
05302	2,0	50	5
34554	2,0	70	5
39178	2,0	90	5
05303	2,5	50	5
34555	2,5	70	5
39179	2,5	90	5
04194	3,0	50	5
34556	3,0	70	5
39180	3,0	90	5
04195	4,0	50	5
34557	4,0	70	5
39181	4,0	90	5
04196	5,0	50	5
34558	5,0	70	5
39182	5,0	90	5
04197	6,0	50	5
34559	6,0	70	5
39183	6,0	90	5
04198	8,0	50	5
34560	8,0	70	5

Square 1/4"

7048 Z

Order-No.			mm	
06637	#1	2,3	50	5
39206	#1	2,3	90	5
06638	#2	2,8	50	5
39207	#2	2,8	90	5
06639	#3	3,3	50	5
39208	#3	3,3	90	5

Torq-Set® 1/4"

7049 TS

Order-No.		mm	
22596	4	50	5
33699	4	90	5
22597	5	50	5
33700	5	90	5
22598	6	50	5
33701	6	90	5
22599	8	50	5
33702	8	90	5
22600	10	50	5

Bit Professional

Order-No.		
08419	1 x 3,0 1 x 3,5 1 x 4,0	10
08420	1 x 5,5 1 x 6,5 1 x 8,0	10
38676	2 x PH1	10
38706	2 x PH1	10
36193	2 x PH2	10
38707	2 x PH2	10
38677	2 x PH3	10
38708	2 x PH3	10
38679	2 x PZ1	10
38709	2 x PZ1	10
38680	2 x PZ2	10
38710	2 x PZ2	10
38681	2 x PZ3	10
38711	2 x PZ3	10
36086	2 x SL/PZ1	10
36082	2 x SL/PZ1	10
32805	1 x T20	10
32806	1 x T25	10
38684	2 x T10	10
38712	2 x T10	10
38685	2 x T15	10
38713	2 x T15	10
38686	2 x T20	10
32808	1 x T20	10
38714	2 x T20	10
38687	2 x T25	10
32809	1 x T25	10
38715	2 x T25	10
38688	2 x T27	10
38716	2 x T27	10
38689	2 x T30	10
38717	2 x T30	10
38690	2 x T40	10
38718	2 x T40	10
07874	1 x T10 1 x T15 1 x T20	10
32807	1 x T20 1 x T25 1 x T30	10
07875	1 x T25 1 x T30 1 x T40	10

Bit set Professional 70 mm

TORX® ball end 1/4" in bit band 10-pcs. **7045BE 9570**

Order-No.	
32804	1
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30

INFOBOX:
TORX® ball end

Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

Which drives are used for each individual product? Page 304

Micro-bit set ESD

assorted 65-pcs. **7000 SK65 ESD**

Order-No.	
39971	1
⊖	1 x 0,8 / 1 x 1,2 / 1 x 1,5 / 1 x 1,8 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 3,5 / 1 x 4,0
✺	1 x 0,7 / 1 x 0,9 / 2 x 1,3 / (0,050") / 1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 2 x 4,0 / (5/32")
✺	1 x 3/32 / 1 x 1/16 / 1 x 5/64 / 1 x 7/64 / 1 x 1/8 / 1 x 9/64
✺	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20
✺	1 x PL1 / 1 x PL2 / 1 x PL3 / 1 x PL4 / 1 x PL5 / 1 x PL6
⊕	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
○	1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 3,5 / 1 x 4,0 / 1 x 4,5 / 1 x 5,0 / 1 x 5,5
○	1 x 5/64 / 1 x 3/32 / 1 x 7/64 / 1 x 1/8 / 1 x 9/64 / 1 x 5/32 / 1 x 3/16 / 1 x 7/32
○	1 x Adapter 1/4" for micro-bits 4 mm drive
○	1 x Bit ratchet 90 mm with thumb wheel Hexagon head, 1/4" in blister pack
○	1 x Screwdriver handle ESD for micro-bits 4 mm drive
○	1 x Extension 100 mm for ESD screwdriver handle and micro-bits

Micro-bit 28 mm

⊖ Slotted drive 4 mm

7000 4 Z

Order-No.	⊖	mm	⊖	
40600	0,8	28	0,20	10
40601	1,2	28	0,25	10
40602	1,5	28	0,25	10
40603	1,8	28	0,30	10
40604	2,0	28	0,40	10
40605	2,5	28	0,40	10
40606	3,0	28	0,50	10
40607	3,5	28	0,60	10
40608	4,0	28	0,80	10

⊕ Phillips drive 4 mm

7001 4 Z

Order-No.	⊕	mm	
40609	PH000	28	10
40610	PH00	28	10
40611	PH0	28	10
40612	PH1	28	10
40613	PH2	28	10

✺ Hexagon drive 4 mm

7003 4 Z

Order-No.	✺	mm	
40614	0,7	28	10
40615	0,9	28	10
40616	1,3 / (0,050")	28	10
40617	1,5	28	10
40618	2,0	28	10
40619	2,5	28	10
40620	3,0	28	10
40621	4,0 / (5/32")	28	10
40622	1/16	28	10
40623	5/64	28	10
40624	3/32	28	10
40625	7/64	28	10
40626	1/8	28	10
40627	9/64	28	10

TORX® drive 4 mm

7005 4 Z

Order-No.		mm	
40628	T1	28	10
40629	T2	28	10
40630	T3	28	10
40631	T4	28	10
40632	T5	28	10
40633	T6	28	10
40634	T7	28	10
40635	T8	28	10
40636	T9	28	10
40637	T10	28	10
40638	T15	28	10
40639	T20	28	10

Pentalobe drive 4 mm

7009 4 Z

Order-No.		mm	
40640	PL1	28	10
40641	PL2	28	10
40642	PL3	28	10
40643	PL4	28	10
40644	PL5	28	10
40645	PL6	28	10

INFOBOX:
Pentalobe

The security profile for Apple devices.

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

Micro nut driver 30 mm

Hexagon socket drive 4 mm

7044 4 Z

Order-No.		mm	
40654	2,0	30	10
40655	2,5	30	10
40656	3,0	30	10
40657	3,5	30	10
40658	4,0	30	10
40659	4,5	30	10
40660	5,0	30	10
40661	5,5	30	10
40646	5/64	30	10
40647	3/32	30	10
40648	7/64	30	10
40649	1/8	30	10
40650	9/64	30	10
40651	5/32	30	10
40652	3/16	30	10
40653	7/32	30	10

Extension 100 mm

for ESD screwdriver handle and micro-bits

710100

Order-No.			mm	
40663	4	4	100	10

Adapter 1/4"

for micro-bits 4 mm drive

7103

Order-No.			
39964	4	1/4	10

Bit holder magnetic

for micro-bits 4 mm drive

7110M

Order-No.			mm	
32505	4	1/4	60	10

Which drives are used for each individual product? Page 304

Bit with thread

Phillips M4

7311 Z

Order-No.	⊕	mm	●	—	→ ←	
01937	PH1	33	5,5	M4	8,00	10
01938	PH2	33	6,0	M4	8,00	10

Pozidriv M4

7312 Z

Order-No.	⊕	mm	●	—	→ ←	
01939	PZ1	33	5,5	M4	8,00	10
01940	PZ2	33	6,0	M4	8,00	10

Phillips M5

7321 Z

Order-No.	⊕	mm	●	—	→ ←	
01942	PH2	33	7,0	M5	8,00	10
01943	PH2	45	6,0	M5	8,00	10

Pozidriv M5

7322 Z

Order-No.	⊕	mm	●	—	→ ←	
01945	PZ2	33	7,0	M5	8,00	10
01946	PZ2	45	6,0	M5	8,00	10

TORX® M5

7325 Z

Order-No.	✱	mm	●	—	→ ←	
35400	T10	45	6,0	M5	8,00	10
35401	T15	45	6,0	M5	8,00	10
35402	T20	45	6,0	M5	8,00	10
35403	T25	45	6,0	M5	8,00	10

Phillips M6

7331 Z

Order-No.	⊕	mm	●	—	→ ←	
04678	PH2	33	8,0	M6	8,00	10
04677	PH2	45	8,0	M6	8,00	10

Pozidriv M6

7332 Z

Order-No.	⊕	mm	●	—	→ ←	
04671	PZ2	33	8,0	M6	8,00	10
04670	PZ2	45	8,0	M6	8,00	10

Phillips UNF 10/32"

7341 Z

Order-No.	⊕	mm	●	—	→ ←	
01947	PH2	45	6,0	10/32 UNF	8,00	10

Pozidriv UNF 10/32"

7342 Z

Order-No.	⊕	mm	●	—	→ ←	
01948	PZ2	45	6,0	10/32 UNF	8,00	10

Wood drill bit

1/4"

7804

Order-No.	✱	mm		◉	
27873	3,0	70	36	1/4	10
27876	4,0	75	43	1/4	10
27877	5,0	85	56	1/4	10
27879	6,0	95	66	1/4	10
27880	8,0	110	81	1/4	10

Spiral drill bit

1/4"

7805

Order-No.	✱	mm		◉	
27882	3,0	38	16	1/4	10
28055	3,1	38	16	1/4	10
27883	3,3	40	18	1/4	10
27884	4,0	43	22	1/4	10
28056	4,1	43	22	1/4	10
27885	4,2	43	22	1/4	10
27886	5,0	48	26	1/4	10
28057	5,1	48	26	1/4	10
27887	6,0	48	26	1/4	10
27888	6,8	48	30	1/4	10
27889	8,0	50	32	1/4	10
27890	8,5	51	34	1/4	10
27891	10,0	54	37	1/4	10

Combination drill bit set

1/4" 5-pcs.

79187 B5

Order-No.	
28026	1
◎	M3 x 36 / M4 x 39 / M5 x 41 / M6 x 44 / M8 x 51

Combination drill bit

1/4" 7807

Order-No.	◎	mm	◉↕	
27897	M3	36	1/4	10
27898	M4	39	1/4	10
27899	M5	41	1/4	10
27900	M6	44	1/4	10
27901	M8	51	1/4	10
27963	M10	65	1/4	10

Countersink bit set

1/4" 5-pcs. 79186 B5

Order-No.		
28027		1
	6,3 x 35 / 8,3 x 35 / 10,4 x 35 / 12,4 x 35 / 16,5 x 35	

Countersink bit

1/4" 7806

Order-No.		mm	◉↕		Ø min.	
27892	6,3	35	1/4	M3	1,5	10
27893	8,3	35	1/4	M4	2,0	10
27894	10,4	35	1/4	M5	2,5	10
27895	12,4	35	1/4	M6	2,8	10
27896	16,5	35	1/4	M8	3,2	10
28058	20,5	35	1/4	M10	3,5	10

Nut driver insert

Hexagon head 1/4" 7044

Order-No.	○	mm	
04514	5,0	55	5
04513	5,5	55	5
04512	6,0	55	5
04511	7,0	55	5
04510	8,0	55	5
04509	10,0	55	5
04508	13,0	55	5
04515	1/4	55	5
04516	5/16	55	5
04517	3/8	55	5

Nut driver insert, magnetic

Hexagon head 1/4" 7044 M

Order-No.	○	mm	
04637	5,0	55	5
04636	5,5	55	5
04635	6,0	55	5
04634	7,0	55	5
04633	8,0	55	5
04632	10,0	55	5
04631	13,0	55	5
04638	1/4	55	5
04639	5/16	55	5
04640	3/8	55	5

Tool shaft

Square, Internal hexagon C6,3 7210

Order-No.	▣	◉		
01933	1/4	1/4	25	5
04204	3/8	1/4	30	5

Which drives are used for each individual product? Page 304

Tool shaft

Square, Internal hexagon C6,3 — 7240

Order-No.	▣	◉		
04685	1/4	1/4	100	5
01935	1/4	1/4	50	5
04684	3/8	1/4	100	5
04362	3/8	1/4	50	5

Adapter DIN 7428.

Hand impact screwdriver set

assorted 1/2" 6-pcs. — 24636 B5

Order-No.		
32573		1
▣	Hand impact screwdriver Internal square 1/2"	
⊖	9 x 1,6 / 11 x 1,6	
⊕	PH2 x 5/16 / PH3 x 5/16	
○	Heavy-duty bit holder clamping with ball Hexagon head, internal square form C 8 (5/16"), 1/2"	

Connector with retaining ring

Hexagon head, Square head form G 6.3 + G 10 + G 12.5 — 7201

Order-No.	○	○			
01924	1/4	1/4	25	D 6,3	2
01926	1/4	3/8	30	D 6,3	2
01922	1/4	1/2	35	D 6,3	2
01927	5/16	3/8	30	D 8	2
01923	5/16	1/2	35	D 8	2

Hand impact screwdriver

Internal square 1/2" — 24636

Order-No.	▣	mm	
32556	1/2	163	1

Connector with quick release holder

Hexagon head, Square head form G 12.5 — 7203

Order-No.	○	▣		
01930	1/4	1/2	50	2

Heavy-duty bit holder clamping with ball

Hexagon head, internal square form C 8 (5/16"), 1/2" — 7204Z-516

Order-No.	○	○	mm	
32547	5/16	1/2	38	5

Bit holder CentroFix Force mechanically lockable

1/4", magnetic — 7148 CF

Order-No.	○	◉	mm	
39133	1/4	1/4	60	1

Bit holder CentroFix mechanically lockable

1/4" — 7148C

Order-No.	○	◉	mm	
32477	1/4	1/4	60	10

Bit holder CentroFix Super Slim mechanically lockable

1/4", magnetic — 7148 CS

Order-No.	○	◉	mm	
39134	1/4	1/4	66	1

Bit holder MagicFlip Force magnetic

with ring magnet, 1/4" — 7123

Order-No.	○	◉	mm	
36800	1/4	1/4	62	10

INFOBOX:
CentroFix Force

- CentroFix Force
- Suitable for all bits with 1/4" hex drive style C6.3 and E6.3.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

INFOBOX:
CentroFix SuperSlim

- Up to 30% reduced outer diameter compared to "conventional" quick release holders.
- Improved screw accessibility in confined holes.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

INFOBOX:
MagicFlip Force

- Facilitates the fastening of long wood screws.
- Optimal holding force thanks to extremely powerful Neodym ring magnet.
- FlipBack: The actuating sleeve automatically springs back during recessing.
- Magnet On/Off: The ring magnet can be "deactivated" by pushing the actuating sleeve back.

Which drives are used for each individual product? Page 304

Bit holder CentroFix mechanically lockable

with stainless-steel shaft, 1/4" — 7148ST

Order-No.	○	◉	mm	
33765	1/4	1/4	60	5

Bit holder clamping with retaining ring

1/4" — 7140

Order-No.	○	◉	mm	
01910	1/4	1/4	57	5

Bit holder magnetic, clamping with retaining ring

1/4" — 7143

Order-No.	○	◉	mm	
01913	1/4	1/4	72	2
36092	1/4	1/4	100	5
34306	1/4	1/4	150	5
36093	1/4	1/4	200	5
36094	1/4	1/4	250	5

Bit holder magnetic, 74 mm

1/4" — 7113

Order-No.	○	◉	mm	
01894	1/4	1/4	74	10

Bit holder magnetic, clamping with retaining ring

Copper beryllium 1/4" — 7142

Order-No.	○	◉	mm	
01912	1/4	1/4	73	2

Bit holder magnetic

extra strong magnet, 1/4" — 7113 P

Order-No.	○	◉	mm	
41922	1/4	1/4	60	10

Bit holder magnetic, 58 mm

1/4" — 7113 S

Order-No.	○	◉	mm	
01895	1/4	1/4	58	10

1/4" in blister pack — 7113 S

Order-No.	○	◉	mm	
07869	1/4	1/4	58	10

INFOBOX:

Drive systems and matching bits

Bit holder	suitable for
CentroFix Force	C 6.3, E 6.3 und 1/4" drives
CentroFix SuperSlim	C 6.3
MagicFlip Force	C 6,3

Universal holder, magnetic/ retaining ring, style G 7.

7183

Order-No.			mm	
01919	1/4	G7	72	2

Industrial bit holder, with magnet, Halfmoon 4 mm.

7110 HM

Order-No.		mm	
36112	4	50	1

Screwdriver with bit holder SoftFinish® magnetic

1/4" — 384

Order-No.			mm		
01475	1/4	125	225	36	10
01476	1/4	300	400	36	5

Screwdriver with bit holder SoftFinish® clamping with retaining ring

flexible shaft, 1/4" — 386

Order-No.			mm		
01479	1/4	150	268	36	10

Screwdriver with bitholder, Quick-release holder

1/4" — 387 01

Order-No.			mm		
25874	1/4	35	146	30	10

Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable

1/4" — 387 02

Order-No.			mm		
40331	1/4	38	149	36	10

Screwdriver with bit holder SoftFinish® magnetic

1/4" — 281 02

Order-No.				
32160	1/4	125	36	10

Screwdriver with bit holder SoftFinish® magnetic

Stubby, 1/4" — 281 01

Order-No.				
29463	1/4	57	34	10

Which drives are used for each individual product? Page 304

Screwdriver with bit holder SoftFinish® ESD, mechanically lockable

1/4" — 387ESD

Order-No.			mm		
32161	1/4	38	148	30	5

Handle: IEC 61340-5-1.

Screwdriver with bit holder SoftFinish® ESD

Stubby, 1/4" — 281-01ESD

Order-No.				
32484	1/4	57	34	10

Handle: IEC 61340-5-1.

Screwdriver handle ESD

for micro-bits 4 mm drive — 2804

Order-No.				
40662	4,0	110	14	10

Screwdriver with T-handle and bit holder magnetic

1/4" — 388

Order-No.				
01481	1/4	150	80	10

Screwdriver with T-handle and two bit holders ComfortGrip magnetic

1/4" — 388DS

Order-No.				
26179	1/4	150	100	10

High-performance offset screwdriver with quick release holder 1/4"

1/4" in blister pack — SB24628

Order-No.				max. Nm	
32310	1/4	1/4	165	57	1

Offset screwdriver with bit holder 1/4", magnetic

1/4" in blister pack — SB24629

Order-No.				max. Nm	
32311	1/4	1/4	130	14	1

Pliers

A cut above the rest for your health.

Wiha pliers combine high-quality materials with ergonomic comfort. Precise interaction between the joints and the exact workmanship of the blades and gripping surfaces ensure optimum functionality. Ergonomically designed and crafted to a high quality standard, they are comfortable to use, causing less body fatigue and thus making work more efficient.

The “OptiGrip” triple-point support design for combination and high-leverage combination pliers ensure an optimum, secure hold when handled. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel provide added safety and stability. With its angled plier shape, the Wiha Inomic® VDE product line is kind to the user's joints, muscles and tendons. Wiha also supplies suitable tools for stripping, skinning and crimping.

For applications in electrics

Installation pliers TriCut Professional electric
Page 253

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®, Switchable
Page 254

Diagonal cutters Professional electric with DynamicJoint®
Page 254

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 256

Needle nose pliers Inomic® VDE with cutting edge and stripping points
Page 257

Needle nose pliers Professional electric with cutting edge straight shape
Page 258

Cable cutter Professional electric
Page 259

Water pump pliers Professional electric with push button adjustment
Page 260

Hacksaw electric
Page 262

Stripping tool automatic up to 16 mm² in blister pack
Page 262

Stripping tool with self-rotating trailing blade
Page 273

Automatic crimp tool for wire-end sleeves hex crimping
Page 265

For applications in mechanics

Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable
Page 268

Diagonal cutters Professional with DynamicJoint®
Page 268

Combination pliers Professional with DynamicJoint® and OptiGrip
Page 270

Needle-nose pliers Professional with cutting edge straight shape
Page 271



Plastic diagonal cutters Classic with opening spring without bevelled edge
Page 273

Pliers wrench Classic
Page 275

Water pump pliers QuickFix Professional automatic automatic
Page 276

Circlip pliers Classic with MagicTips® for inner rings (holes), straight
Page 278

For applications in electronics

Pliers set Professional ESD, Diagonal cutters, oblique end cutting nippers, needle nose pliers 4-pcs.
Page 282

Needle nose pliers Professional ESD straight
Page 285

Needle nose pliers Electronic narrow, short head straight form
Page 287

Universal tweezers Professional ESD
Page 288

Pliers set Professional electric

+20 % Power | Perfect Grip | 1000 V IEC 60900

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.	Z 99 0 001 06
Order-No.	
26852	1

Trimming / cutting

- Diagonal cutters Professional electric with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741)

Supplying / holding

- Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708)
- Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Manufactured acc. to IEC 60900.

Pliers set Industrial electric

+20 % Power | Perfect Grip | 1000 V IEC 60900

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.	Z 99 0 001 09
Order-No.	
38637	1

Trimming / cutting

- Industrial electric diagonal cutters with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (33177)

Supplying / holding

- Industrial electric combination pliers with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (33186)
- Industrial electric needle nose pliers with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (33178)

Manufactured acc. to IEC 60900.

INFOBOX:

Professional pliers Industrial pliers

Professional

Industrial

- Professional: pliers, chrome-plated
- Industrial: pliers, polished/black oxidised

Installation pliers TriCut Professional electric

Z 14 1 06

Order-No.	mm			Ø mm	SB	
38552	170	7	13	1.6		5
38853	170	7	13	1.6	x	5

Manufactured acc. to IEC 60900.

Installation pliers TriCut Classic

Z 14 1 01

Order-No.	mm			Ø mm	SB	
38627	170	7	13	1.6		5
38854	170	7	13	1.6	x	5

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Stripping diagonal cutters Professional electric with DynamicJoint®

Z 14 0 06

Order-No.	mm			Ø mm	SB	
26745	160	6 ½	13	1.6		5
27431	160	6 ½	13	1.6	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

Diagonal cutters Professional electric with DynamicJoint®

Z 12 0 06

Order-No.	mm			Ø mm	SB	
26737	140	5 ½	16	1.4		5
27428	140	5 ½	16	1.4	x	5
26741	160	6 ½	16	1.6		5
27429	160	6 ½	16	1.6	x	5
26744	180	7	17	1.8		5
27430	180	7	17	1.8	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®

Switchable

Z 18 0 06

Order-No.	mm			Ø mm	SB	
38191	200	8	21	3		5
38984	200	8	21	3	x	5

Manufactured acc. to IEC 60900.

Industrial electric diagonal cutters with DynamicJoint®

Z 12 0 09

Order-No.	mm			Ø mm	SB	
38633	140	5 ½	16	1.4		5
38860	140	5 ½	16	1.4	x	5
33177	160	6 ½	16	1.6		5
38861	160	6 ½	16	1.6	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

INFOBOX:
DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

Heavy-duty diagonal cutters Professional electric with DynamicJoint®

+40% Power

1000 V IEC 60900

with switchable opening spring **Z 16 3 06**

Order-No.	mm			Ø mm	SB	
40921	160	6,5	17	2		5
41309	160	6,5	17	2	x	5
41274	180	7	18	2,3		5
41319	180	7	18	2,3	x	5
41279	200	8	19	2,5		5
41329	200	8	19	2,5	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

Industrial electric heavy-duty diagonal cutters with DynamicJoint®

+40% Power

1000 V IEC 60900

with switchable opening spring **Z 16 3 09**

Order-No.	mm			Ø mm	SB	
40922	160	6,5	17	2		5
41310	160	6,5	17	2	x	5
41275	180	7	18	2,3		5
41320	180	7	18	2,3	x	5
41280	200	8	19	2,5		5
41330	200	8	19	2,5	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

INFOBOX:

Heavy-duty diagonal cutters with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional electric with DynamicJoint® and OptiGrip

+20 % Power | Perfect Grip | VDE GS | 1000 V IEC 60900

with extra long cutting edge **Z 01 0 06**

Order-No.	mm			Ø mm	SB	
26705	160	6 ½	16	1.6		5
27328	160	6 ½	16	1.6	x	5
26708	180	7	16	1.8		5
27418	180	7	16	1.8	x	5
26711	200	8	17	2		5
27419	200	8	17	2	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip

+40% Power | Perfect Grip | VDE GS | 1000 V IEC 60900

with extra long cutting edge **Z 02 0 06**

Order-No.	mm			Ø mm	SB	
26714	200	8	18	2.3		5
27420	200	8	18	2.3	x	5
26717	225	9	19	2.5		5
27421	225	9	19	2.5	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

Industrial electric combination pliers with DynamicJoint® and OptiGrip

+20 % Power | Perfect Grip | VDE GS | 1000 V IEC 60900

with extra long cutting edge **Z 01 0 09**

Order-No.	mm			Ø mm	SB	
33186	180	7	16	1.8		5
38855	180	7	16	1.8	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

High-leverage industrial electric combination pliers with DynamicJoint® and OptiGrip

Perfect Grip | +40% Power | VDE GS | 1000 V IEC 60900

Z 02 0 09

Order-No.	mm			Ø mm	SB	
35465	225	9	19	2.5		5
38856	225	9	19	2.5	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

INFOBOX:

OptiGrip

Perfect Grip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Industrial lineman's pliers with DynamicJoint®

with extra long cutting edge **Z 02 2 02**

Order-No.	mm			Ø mm	SB	
40927	250	10	20	2.5		5
41219	250	10	20	2.5	x	5

Classic lineman's pliers with DynamicJoint®

with extra long cutting edge **Z 02 2 01**

Order-No.	mm			Ø mm	SB	
40709	250	10	20	2.5		5
41218	250	10	20	2.5	x	5

Inomic® electric combination pliers

Z 01 0 16

Order-No.	Typ		Ø mm	
33261	180	12	1.6	5

Manufactured acc. to IEC 60900.

Needle nose pliers Inomic® VDE

with cutting edge and stripping points **Z 06 0 16**

Order-No.	Typ		Ø	
33259	160	12	1,6	5

Manufactured acc. to IEC 60900.

INFOBOX:
Wiha Inomic®

Innovative and ergonomic.

- The angled shape of the Inomic® pliers enables work which is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.
- Improved grip control due to highly sensitive opening spring.
- Like an extension of your own hand: gripping is simple, firm and safe.
- Pliers can be transported and stored in a closed position, thanks to a locking mechanism.

Needle nose pliers Professional electric

with cutting edge straight shape

Z 05 0 06

Order-No.	mm			Ø mm	SB	
26720	160	6 ½	16	1.2		5
27422	160	6 ½	16	1.2	x	5
26727	200	8	17	1.6		5
27423	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Needle nose pliers Professional electric

with cutting edge curved shape, approx. 40°

Z 05 1 06

Order-No.	mm			Ø mm	SB	
26728	160	6 ½	16	1.2		5
27424	160	6 ½	16	1.2	x	5
26729	200	8	17	1.6		5
27425	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Industrial electric needle nose pliers

with cutting edge straight shape

Z 05 0 09

Order-No.	mm			Ø mm	SB	
35477	160	6 1/2	16	1.2		5
38857	160	6 1/2	16	1.2	x	5
33178	200	8	17	1.6		5
38858	200	8	17	1.6	x	1

DIN ISO 5745. Manufactured acc. to IEC 60900.

Industrial electric needle nose pliers

with cutting edge curved shape, approx. 40°

Z 05 1 09

Order-No.	mm			Ø mm	SB	
35462	200	8	17	1.6		5
38859	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Long flat-nose pliers Professional electric

1000 V IEC 60900

Z 07 0 06

Order-No.	mm		SB	
26732	160	6 ½		5
27426	160	6 ½	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Cable cutter Professional electric

1000 V IEC 60900

Z 50 1 06

Order-No.	mm			mm²	SB	
34743	160	6 ½	16	50		5
35704	160	6 ½	16	50	x	5
34744	200	8	20	60		5
35705	200	8	20	60	x	5

Manufactured acc. to IEC 60900.

Long round-nose pliers Professional electric

1000 V IEC 60900

Z 09 0 06

Order-No.	mm		SB	
26735	160	6 ½		5
27427	160	6 ½	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Industrial electric cable cutter

1000 V IEC 60900

Z 50 1 09

Order-No.	mm			mm²	SB	
38636	160	6 ½	16	50		5
38865	160	6 ½	16	50	x	5
35479	200	8	20	60		5
38866	200	8	20	60	x	5

Manufactured acc. to IEC 60900.

Cable cutter Classic

Z 50 1 01

Order-No.	mm			mm²	SB	
34729	160	6 ½	16	50		5
36217	160	6 ½	16	50	x	5
34730	200	8	20	60		5
36981	200	8	20	60	x	5

Stripping pliers Professional electric

1000 V IEC 60900

Z 55 0 06

Order-No.	mm		Ø	mm²	SB	
26847	160	6 ½	5	10		5
27437	160	6 ½	5	10	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Water pump pliers Professional electric

1000 V IEC 60900

box type

Z 21 0 06

Order-No.	mm				SB	
33520	250	10	2	50		5
38631	250	10	2	50	x	5

DIN ISO 8976. Manufactured acc. to IEC 60900.

Industrial electric stripping pliers

1000 V IEC 60900

Z 55 0 09

Order-No.	mm		Ø	mm²	SB	
36711	160	6 1/2	5	10		5
38867	160	6 1/2	5	10	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Water pump pliers Professional electric

1000 V IEC 60900

with push button adjustment

Z 22 0 06

Order-No.	mm				SB	
37450	250	10	2	50		5
38632	250	10	2	50	x	5

DIN ISO 8976. Manufactured acc. to IEC 60900.

Stripping pliers Professional

Z 55 0 05

Order-No.	mm		Ø	mm²	SB	
26846	160	6 ½	5	10		5
27417	160	6 ½	5	10	x	5

DIN ISO 5743.

Stripping pliers Classic

Z 55 0 01

Order-No.	mm		Ø	mm²	SB	
26845	160	6 ½	5	10		5
27368	160	6 ½	5	10	x	5

DIN ISO 5743.

Stripping pliers Industrial

Z 55 0 02

Order-No.	mm		Ø	mm²	SB	
32345	160	6 ½	5	10		5
34313	160	6 ½	5	10	x	5

DIN ISO 5743.

Stripping tool automatic

up to 16 mm² in blister pack — **Z 57 0 06 SB**

Order-No.	mm		mm²	AWG	SB	
42062	200	8	0,03 - 16	32-5	x	1

Stripping tool automatic

up to 6 mm² in blister pack — **246 75 SB**

Order-No.	mm		mm²	AWG	SB	
36050	190	7 ½	0,2-6,0	24-10	x	1

Spare blade and gripping jaw set

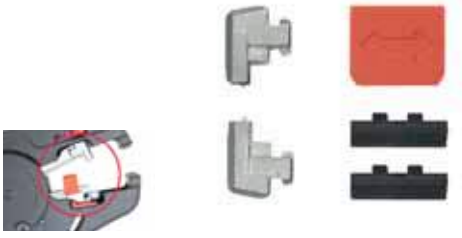

for automatic stripping tool — **Z 57 0 001 06K**

Order-No.	
42162	1

Hacksaw electric

insulated with three saw blades 150 mm — **SB246176**

Order-No.		mm	SB	
43125	150	280	x	1

INFOBOX:

Stripping tool, automatic up to 16mm²

- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.

Stripping tool

with self-rotating trailing blade **246 22 02**

Order-No.	mm		Ø mm	SB	
35969	165	6½	4,0-28		1
35538	165	6½	4,0-28	x	1

Stripping tool

for round cable, in blister pack **246 77 SB**

Order-No.	mm		mm²	SB	
36052	125	5	8-13	x	1

Cable stripping knife

1000 V IEC 60900

straight cutting edge for round cables in blister pack **246 80 SB**

Order-No.	mm		SB	
38798	200	8	x	1

Manufactured acc. to IEC 60900.

Stripping tool

for coaxial cable, in blister pack **246 76 SB**

Order-No.	mm		mm²	SB	
36051	110	4¼	4,8-7,5	x	1

Cable stripping knife

1000 V IEC 60900

hooked blade with sliding shoe for round cable, in blister pack **246 78 SB**

Order-No.	mm		SB	
36053	200	8	x	1

Manufactured acc. to IEC 60900.

Crimping pliers Classic

Z 60 0 01

Order-No.	mm		mm²	
28330	145	5 ¾	0,25-2,5	5

DIN ISO 5743.

Crimping pliers Professional electric

Z 60 0 06

Order-No.	mm		mm²	SB	
35861	145	5 ¾	0,25-2,5		5
38985	145	5 ¾	0,25-2,5	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Crimping pliers Classic

Z 60 0 01

Order-No.	mm		mm²	
30066	180	7	0,25-16	5

DIN ISO 5743.

Crimping pliers Professional electric

Z 60 0 06

Order-No.	mm		mm²	SB	
35862	180	7	0,25-16		5
38986	180	7	0,25-16	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Automatic crimp tool

for wire-end sleeves hex crimping

Z 62 0 005 06 SB

Order-No.	mm	mm²	AWG	
41246	210	0,08-16	28-5	1

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027

Crimp tool

for insulated cable eyes and contacts

Z 62 0 002 06

Order-No.	mm	mm²	AWG	
33841	220	0,5-6	20-10	1

For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234.

Crimp tool

for wire-end sleeves

Z 62 0 001 06

Order-No.	mm	mm²	AWG	SB	
33844	220	0,14-16	26-5		1
40342	220	0,14-16	26-5	x	1

For processing of wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.

Crimp tool

for non-insulated cable eye with closed sleeve

Z 62 0 004 06

Order-No.	mm	mm²	AWG	
33843	220	0,1-16	26-6	1

For processing of non-isolated cable eyes, pin-end cable connectors, batch connectors and mini cable eyes according to DIN 46234/ DIN 46230/ DIN 46341.

INFOBOX:

Automatic crimp tool

- Process-safe hexagonal crimping prevents smaller wire-end sleeves from snagging.
- These crimping pliers can handle all standard applications with a crimping range between 0.08 and 16 mm².
- Suitable for both single wire-end sleeves and twin wire-end sleeves thanks to automatic crimping.

Crimp tool

for non-insulated male blade connectors

Z 62 0 003 06

Order-No.	mm	mm²	AWG	
33842	220	0,25-6	24-10	1

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

Shear for electricians

with crimp function in blister pack **Z 71 7 160 06 SB**

Order-No.	mm	mm²	
41923	160	50	5

Pliers set Classic

Combination pliers, needle nose pliers, diagonal cutters 3-pcs. **Z 99 0 001 01**

Order-No.	
26850	1
	Combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (26706)
	Diagonal cutters Classic 160mm, 6 ½" (26739)
	Classic needle nose pliers with cutting edge straight shape 160mm, 6 ½" (26718)

Craftsman's cutters

Standard model made of stainless steel **Z 71 5 06**

Order-No.	mm	"	
29420	145	5 ¾	5

Pliers set Classic

High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs. **Z 99 0 002 01**

Order-No.	
26853	1
	High-leverage combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26712)
	Heavy-duty diagonal cutters Classic with DynamicJoint® 180mm, 7" (41261)
	Water pump pliers QuickFix Classic automatic 250mm, 10" (39091)

Pliers set Professional

+40% Power | Perfect Grip

High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs. **Z 99 0 002 05**

Order-No.	
26854	1
	High-leverage combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26713)
	Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180mm, 7" (41273)
	Water pump pliers QuickFix Professional automatic automatic 250mm, 10" (39093)

Pliers set Classic with MagicTips®

Safety Hold

Circlip pliers 4-pcs. **Z 99 0 007 01**

Order-No.	
34708	1

Supplying / holding

	Circlip pliers Classic with MagicTips® for inner rings (holes), straight J 1, 140mm (34689) / J 2, 180mm (34690)
	Circlip pliers Classic with MagicTips® for outer rings (shafts), straight A 1, 140mm (34699) / A 2, 185mm (34700)

• with safety latching function

Pliers set Classic

Circlip pliers 4-pcs. **Z 99 0 004 01**

Order-No.	
26793	1
	Classic circlip pliers for inner rings (holes), straight J 1, 140mm (26782) / J 2, 180mm (26783)
	Classic circlip pliers for outer rings (shafts), straight A 1, 140mm (26790) / A 2, 180mm (26791)

INFOBOX:
MagicTips®

Safety Hold

Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Professional BiCut® high-performance diagonal cutters with DynamicJoint®

Switchable

Z 18 0 05

Order-No.	mm			Ø mm	SB	
38190	200	8	21	3		5
38983	200	8	21	3	x	1

Based on DIN ISO 5749.

High-performance diagonal cutters BiCut® Industrial with DynamicJoint®

Switchable

Z 18 0 02

Order-No.	mm			Ø mm	SB	
38189	200	8	21	3		5
38982	200	8	21	3	x	5

Based on DIN ISO 5749.

BiCut® Classic high-performance diagonal cutters with DynamicJoint®

Switchable

Z 18 0 01

Order-No.	mm			Ø mm	SB	
38060	200	8	21	3		5
38981	200	8	21	3	x	5

Based on DIN ISO 5749.

Diagonal cutters Professional with DynamicJoint®

Z 12 0 05

Order-No.	mm			Ø mm	SB	
26736	140	5 ½	16	1.4		5
27409	140	5 ½	16	1.4	x	5
26740	160	6 ½	16	1.6		5
27507	160	6 ½	16	1.6	x	5
26743	180	7	17	1.8		5
27410	180	7	17	1.8	x	5

DIN ISO 5749.

Diagonal cutters Industrial with DynamicJoint®

Z 12 0 02

Order-No.	mm			Ø mm	SB	
30975	140	5 ½	16	1.4		5
34311	140	5 ½	16	1.4	x	5
30827	160	6 ½	16	1.6		5
34516	160	6 ½	16	1.6	x	5
30976	180	7	17	1.8		5
34571	180	7	17	1.8	x	5

DIN ISO 5749.

Diagonal cutters Classic

Z 12 0 01

Order-No.	mm			Ø mm	SB	
26738	140	5 ½	16	1.4		5
27346	140	5 ½	16	1.4	x	5
26739	160	6 ½	16	1.6		5
27347	160	6 ½	16	1.6	x	5
26742	180	7	17	1.8		5
27348	180	7	17	1.8	x	5

DIN ISO 5749.

Heavy-duty diagonal cutters Industrial with DynamicJoint®

with switchable opening spring

Z 16 3 02

Order-No.	mm			Ø mm	SB	
40919	160	6,5	17	2		5
41307	160	6,5	17	2	x	5
41272	180	7	18	2,3		5
41317	180	7	18	2,3	x	5
41277	200	8	19	2,5		5
41327	200	8	19	2,5	x	5

Heavy-duty diagonal cutters Professional with DynamicJoint®

with switchable opening spring

Z 16 3 05

Order-No.	mm			Ø mm	SB	
40920	160	6,5	17	2		5
41308	160	6,5	17	2	x	5
41273	180	7	18	2,3		5
41318	180	7	18	2,3	x	5
41278	200	8	19	2,5		5
41328	200	8	19	2,5	x	5

Heavy-duty diagonal cutters Classic with DynamicJoint®

Z 16 2 01

Order-No.	mm			Ø mm	SB	
40913	160	6,5	17	2		5
41301	160	6,5	17	2	x	5
41261	180	7	18	2,3		5
41311	180	7	18	2,3	x	5
41266	200	8	19	2,5		5
41321	200	8	19	2,5	x	5

INFOBOX:

Heavy-duty diagonal cutters with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional with DynamicJoint® and OptiGrip

with extra long cutting edge

Z 01 0 05

Order-No.	mm			Ø mm	SB	
26704	160	6 ½	16	1.6		5
27327	160	6 ½	16	1.6	x	5
26707	180	7	16	1.8		5
27399	180	7	16	1.8	x	5
26710	200	8	17	2		5
27400	200	8	17	2	x	5

DIN ISO 5746.

Combination pliers Classic with DynamicJoint® and OptiGrip

with extra long cutting edge

Z 01 0 01

Order-No.	mm			Ø mm	SB	
26703	160	6 ½	16	1.6		5
27325	160	6 ½	16	1.6	x	5
26706	180	7	16	1.8		5
27336	180	7	16	1.8	x	5
26709	200	8	17	2		5
27337	200	8	17	2	x	5

DIN ISO 5746.

Combination pliers Industrial with DynamicJoint® and OptiGrip

with extra long cutting edge

Z 01 0 02

Order-No.	mm			Ø mm	SB	
30979	160	6 ½	16	1.6		5
34565	160	6 ½	16	1.6	x	5
30826	180	7	16	1.8		5
34307	180	7	16	1.8	x	5
30978	200	8	17	2		5
34308	200	8	17	2	x	5

DIN ISO 5746.

INFOBOX:
DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

High-leverage combination pliers Professional with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 02 0 05

Order-No.	mm			Ø mm	SB	
26713	200	8	18	2.3		5
27401	200	8	18	2.3	x	5
26716	225	9	19	2.5		5
27402	225	9	19	2.5	x	5

DIN ISO 5746.

High-leverage combination pliers Classic with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 02 0 01

Order-No.	mm			Ø mm	SB	
26712	200	8	18	2.3		5
27338	200	8	18	2.3	x	5
26715	225	9	19	2.5		5
27339	225	9	19	2.5	x	5

DIN ISO 5746.

High-leverage combination pliers Industrial with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 02 0 02

Order-No.	mm			Ø mm	SB	
32319	200	8	18	2.3		5
34566	200	8	18	2.3	x	5
32320	225	9	19	2.5		5
34567	225	9	19	2.5	x	5

DIN ISO 5746.

Needle-nose pliers Professional

with cutting edge straight shape — Z 05 0 05

Order-No.	mm			Ø mm	SB	
26719	160	6 ½	16	1.2		5
27403	160	6 ½	16	1.2	x	5
26722	200	8	17	1.6		5
27404	200	8	17	1.6	x	5

DIN ISO 5745.

INFOBOX:
OptiGrip

Perfect Grip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Industrial needle nose pliers

with cutting edge straight shape

Z 05 0 02

Order-No.	mm			Ø mm	SB	
32322	160	6 ½	16	1.2		5
34309	160	6 ½	16	1.2	x	5
32323	200	8	17	1.6		5
34515	200	8	17	1.6	x	5

DIN ISO 5745.

Needle-nose pliers Professional

with cutting edge curved shape, approx. 40°

Z 05 1 05

Order-No.	mm			Ø mm	SB	
26724	160	6 ½	16	1.2		5
27405	160	6 ½	16	1.2	x	5
26726	200	8	17	1.6		5
27406	200	8	17	1.6	x	5

DIN ISO 5745.

Classic needle nose pliers

with cutting edge straight shape

Z 05 0 01

Order-No.	mm			Ø mm	SB	
26718	160	6 ½	16	1.2		5
27340	160	6 ½	16	1.2	x	5
26721	200	8	17	1.6		5
27341	200	8	17	1.6	x	5

DIN ISO 5745.

Industrial needle nose pliers

with cutting edge curved shape, approx. 40°

Z 05 1 02

Order-No.	mm			Ø mm	SB	
32324	160	6 ½	16	1.2		5
34569	160	6 ½	16	1.2	x	5
32328	200	8	17	1.6		5
34570	200	8	17	1.6	x	5

DIN ISO 5745.

Classic needle nose pliers

with cutting edge curved shape, approx. 40°

Z 05 1 01

Order-No.	mm			Ø mm	SB	
26723	160	6 ½	16	1.2		5
27342	160	6 ½	16	1.2	x	5
26725	200	8	17	1.6		5
27343	200	8	17	1.6	x	5

DIN ISO 5745.

Classic precision mechanic's needle nose pliers

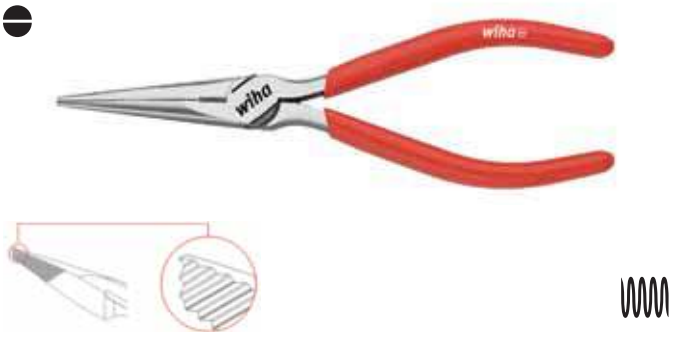

with cutting edge and opening spring in straight shape

Z 36 0 01

Order-No.	mm			Ø mm	
36483	160	6½	10	2	5

DIN ISO 5745.

Plastic diagonal cutters Classic

with opening spring without bevelled edge

Z 15 0 01

Order-No.	mm			
37402	125	5	2	5
37403	160	6 ½	3	5

DIN ISO 5743.

Precision mechanic's diagonal cutters Classic

with opening spring

Z 44 3 01

Order-No.	mm			Ø mm	SB	
36189	125	5	7	0.8		5
43240	125	5	7	0,8	x	5

DIN ISO 5749.

Long flat-nose pliers Professional

Z 07 0 05

Order-No.	mm		SB	
26731	160	6 ½		5
27407	160	6 ½	x	5

DIN ISO 5745.

Long round-nose pliers Professional

Z 09 0 05

Order-No.	mm		SB	
26734	160	6 ½		5
27408	160	6 ½	x	5

DIN ISO 5745.

Long flat-nose pliers Industrial

Z 07 0 02

Order-No.	mm		SB	
32330	160	6 ½		5
34310	160	6 ½	x	5

DIN ISO 5745.

Long round-nose pliers Industrial

Z 09 0 02

Order-No.	mm		SB	
32332	160	6 ½		5
34568	160	6 ½	x	5

DIN ISO 5745.

Long flat-nose pliers Classic

Z 07 0 01

Order-No.	mm		SB	
26730	160	6 ½		5
27344	160	6 ½	x	5

DIN ISO 5745.

Long round-nose pliers Classic

Z 09 0 01

Order-No.	mm		SB	
26733	160	6 ½		5
27345	160	6 ½	x	5

DIN ISO 5745.

Pliers wrench Classic

Z 25 0 01

Order-No.	mm			
40923	250	10	46	6

Water pump pliers Industrial

box type

Z 21 0 02

Order-No.	mm				SB	
36038	180	7	1	30		5
36985	180	7	1	30	x	5
32342	250	10	2	50		5
34312	250	10	2	50	x	5
36039	300	12	2 ½	63		5
36986	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers Professional

box type

Z 21 0 05

Order-No.	mm				SB	
26762	250	10	2	50		5
27414	250	10	2	50	x	5

DIN ISO 8976.

Water pump pliers Classic

box type

Z 21 0 01

Order-No.	mm				SB	
26760	180	7	1	30		5
27350	180	7	1	30	x	5
26761	250	10	2	50		5
27381	250	10	2	50	x	5
26763	300	12	2 ½	63		5
27382	300	12	2 ½	63	x	5

DIN ISO 8976.

INFOBOX:
Plier wrench

- Required width setting directly on the work piece with no need to press any buttons
- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.

Water pump pliers Professional

with push button **Z 22 0 05**

Order-No.	mm				SB	
26766	250	10	2	50		5
27415	250	10	2	50	x	5

DIN ISO 8976.

Water pump pliers Industrial

with push button **Z 22 0 02**

Order-No.	mm				SB	
36040	180	7	1	30		5
36987	180	7	1	30	x	1
32352	250	10	2	50		5
34518	250	10	2	50	x	5
36041	300	12	2 ½	63		5
36988	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers Classic

with push button **Z 22 0 01**

Order-No.	mm				SB	
26764	180	7	1	30		5
27351	180	7	1	30	x	5
26765	250	10	2	50		5
27383	250	10	2	50	x	5
26767	300	12	2 ½	63		5
27384	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers QuickFix Professional automatic

automatic **Z 23 1 05**

Order-No.	mm				SB	
39093	250	10	1 ½	40		1
39095	250	10	1 ½	40	x	5

DIN ISO 8976.

Water pump pliers QuickFix Classic

automatic **Z 23 1 01**

Order-No.	mm				SB	
39091	250	10	1 ½	40		1
39094	250	10	1 ½	40	x	5

DIN ISO 8976.

Heavy-duty end cutting nippers Classic

Z 17 0 01

Order-No.	mm			Ø mm	SB	
26757	160	6 ½	16	1.6		5
27372	160	6 ½	16	1.6	x	5
26758	180	7	17	1.8		5
27373	180	7	17	1.8	x	5
26759	200	8	18	2		5
27374	200	8	18	2	x	5

DIN ISO 5748.

Pincers Classic

Z 30 0 01

Order-No.	mm			Ø mm	SB	
26771	180	7	12	2		5
27375	180	7	12	2	x	5
26772	200	8	13	2.2		5
27376	200	8	13	2.2	x	5

DIN ISO 9243.

Heavy-duty Classic Monier pliers

Z 32 0 01

Order-No.	mm			Ø mm	SB	
40712	300	12	19	2.3		5
41220	300	12	19	2.3	x	5

Monier pliers Classic

Z 31 0 01

Order-No.	mm			Ø mm	SB	
26774	220	8 ¾	16	1.6		5
27377	220	8 ¾	16	1.6	x	5
26776	250	10	17	1.8		5
27378	250	10	17	1.8	x	5
26778	280	11	18	2		5
27379	280	11	18	2	x	5
26780	300	12	18	2		5
27380	300	12	18	2	x	5

DIN ISO 9242.

Heavy-duty Classic Plus Monier pliers

without handle cover

Z 32 0 10

Order-No.	mm			Ø mm	SB	
40713	300	12	19	2.3		5
41221	300	12	19	2.3	x	5

Monier pliers Classic

without handle cover

Z 31 0 00

Order-No.	mm			Ø mm	SB	
26773	220	8 ¾	16	1.6		5
27501	220	8 ¾	16	1.6	x	5
26775	250	10	17	1.8		5
27502	250	10	17	1.8	x	5
26777	280	11	18	2		5
27503	280	11	18	2	x	5
26779	300	12	18	2		5
27504	300	12	18	2	x	5

DIN ISO 9242.

Circlip pliers Classic with MagicTips®

Safety Hold

for inner rings (holes), straight

Z 33 4 01

Order-No.	Typ	mm			SB	
34688	J 0	140	5 ½	8-13		5
36975	J 0	140	5 ½	8-13	x	5
34689	J 1	140	5 ½	12-25		5
36225	J 1	140	5 ½	12-25	x	5
34690	J 2•	180	7	19-60		5
36222	J 2•	180	7	19-60	x	5
34691	J 3•	220	9	40-100		5
36272	J 3•	220	9	40-100	x	5
34692	J 4•	305	12	85-140		5

• with safety latching function DIN ISO 5256.

Circlip pliers Classic with MagicTips®

Safety Hold

for outer rings (shafts), straight

Z 34 4 01

Order-No.	Typ	mm			SB	
34698	A 0	140	5 ½	7-10		5
36977	A 0	140	5 ½	7-10	x	5
34699	A 1	140	5 ½	10-25		5
36978	A 1	140	5 ½	10-25	x	5
34700	A 2•	185	7	19-60		5
36220	A 2•	185	7	19-60	x	5
34701	A 3•	240	9	40-100		5
36219	A 3•	240	9	40-100	x	5
34702	A 4•	300	12	85-140		5

• with safety latching function DIN ISO 5254.

Circlip pliers Classic with MagicTips®

Safety Hold

for inner rings (holes) with angled shape

Z 33 5 01

Order-No.	Typ	mm			SB	
34693	J 01	140	5 ½	8-13		5
36976	J 01	140	5 ½	8-13	x	5
34694	J 11	140	5 ½	12-25		5
36223	J 11	140	5 ½	12-25	x	5
34695	J 21•	180	7	19-60		5
36224	J 21•	180	7	19-60	x	5
34696	J 31•	220	9	40-100		5
36226	J 31•	220	9	40-100	x	5
34697	J 41•	305	12	85-140		5

• with safety latching function DIN ISO 5256.

Circlip pliers Classic with MagicTips®

Safety Hold

for outer rings (shafts), angled

Z 34 5 01

Order-No.	Typ	mm			SB	
34703	A 01	140	5 ½	7-10		5
36979	A 01	140	5 ½	7-10	x	5
34704	A 11	140	5 ½	10-25		5
36980	A 11	140	5 ½	10-25	x	1
34705	A 21•	185	7	19-60		5
36218	A 21•	185	7	19-60	x	1
34706	A 31•	240	9	40-100		5
36221	A 31•	240	9	40-100	x	5
34707	A 41•	300	12	85-140		5

• with safety latching function DIN ISO 5254.

Classic circlip pliers

for inner rings (holes), straight

Z 33 0 01

Order-No.	Typ	mm			SB	
26781	J 0	139	5 ½	8-13		5
27352	J 0	139	5 ½	8-13	x	5
26782	J 1	140	5 ½	12-25		5
27353	J 1	140	5 ½	12-25	x	5
26783	J 2	180	7	19-60		5
27354	J 2	180	7	19-60	x	5
26784	J 3	225	9	40-100		5
27355	J 3	225	9	40-100	x	5
29425	J 4	310	12	85-140		5
39027	J 4	310	12	85-140	x	5

DIN ISO 5256.

Classic circlip pliers

for outer rings (shafts), straight

Z 34 0 01

Order-No.	Typ	mm			SB	
26789	A 0	139	5 ½	3-10		5
27360	A 0	139	5 ½	3-10	x	5
26790	A 1	140	5 ½	10-25		5
27361	A 1	140	5 ½	10-25	x	5
26791	A 2	180	7	19-60		5
27362	A 2	180	7	19-60	x	5
26792	A 3	225	9	40-100		5
27363	A 3	225	9	40-100	x	5
29428	A 4	310	12	85-140		5

DIN ISO 5254.

Classic circlip pliers

for inner rings (holes) with angled shape

Z 33 1 01

Order-No.	Typ	mm			SB	
26785	J 01	139	5 ½	8-13		5
27356	J 01	139	5 ½	8-13	x	5
26786	J 11	140	5 ½	12-25		5
27357	J 11	140	5 ½	12-25	x	5
26787	J 21	180	7	19-60		5
27358	J 21	180	7	19-60	x	5
26788	J 31	225	9	40-100		5
27359	J 31	225	9	40-100	x	5
29427	J 41	310	12	85-140		5
38938	J 41	310	12	85-140	x	5

DIN ISO 5256.

Classic circlip pliers

for outer rings (shafts), angled

Z 34 1 01

Order-No.	Typ	mm			SB	
26794	A 01	139	5 ½	3-10		5
27364	A 01	139	5 ½	3-10	x	5
26795	A 11	140	5 ½	10-25		5
27365	A 11	140	5 ½	10-25	x	5
26796	A 21	180	7	19-60		5
27366	A 21	180	7	19-60	x	5
26797	A 31	225	9	40-100		5
27367	A 31	225	9	40-100	x	5
29429	A 41	310	12	85-140		5
38937	A 41	310	12	85-140	x	5

DIN ISO 5254.

Corner pipe pliers Classic

S-mouth

Z 26 0 00

Order-No.	mm			
29435	320	1	0-40	1
29436	420	1 ½	0-55	1
29437	535	2	0-67	1

DIN 5234.

Professional revolving punch pliers

Z 65 0 05

Order-No.	mm		Ø	
28402	225	9	2,0-4,5	5

Corner pipe pliers Classic

45°

Z 26 1 00

Order-No.	mm			
29438	315	1	0-40	1
29439	420	1 ½	0-55	1
29440	570	2	0-67	1

DIN 5234.

Revolving punch and loop pliers Professional

Z 65 2 05

Order-No.	mm		Ø	
29550	225	9	4,0-5,0	5

Corner pipe pliers Classic

90°

Z 26 2 00

Order-No.	mm			
29441	320	1	0-40	1
29442	415	1 ½	0-55	1
29443	555	2	0-67	1

DIN 5234.

Gripping pliers Classic

with wire cutter

Z 66 0 00

Order-No.	mm			
29485	180	7	8-30	0-20	5
29486	250	10	8-40	0-20	5
29487	300	12	8-65	0-30	5

Bolt cutter Classic

Z 27 0 01

Order-No.	mm	"		Ø mm	
39374	450	18	6	6	1
39376	600	24	7	8	1
39378	750	30	8	9	1
39380	900	36	9	11	1

Replacement cutter head

for bolt cutter Classic

Z 27 0 01K

Order-No.		Ø mm	
39375	6	6	1
39377	7	8	1
39379	8	9	1
39381	9	11	1

Pliers set Professional ESD

Diagonal cutters, oblique end cutting nippers, needle nose pliers 4-pcs.

Z 99 0 001 04

Order-No.	
33507	1
Diagonal cutters Professional ESD wide, pointed head without bevelled edge 115mm, 4 ½" (26821)	
Diagonal cutters Professional ESD wide, semi-rounded head with bevelled edge 115mm, 4 ½" (26831)	
Oblique end cutting nippers Professional ESD narrow head, approx. 40° with small bevelled edge 110mm, 4 ¼" (26838)	
Needle nose pliers Professional ESD straight 120mm, 4 ¾" (26799)	

SMD tweezer set Professional ESD

assorted 4-pcs.

ZP 99 0 140 02

Order-No.	
32349	1
Universal tweezers Professional ESD Type AA 130mm, AA (32318)	
Precision tweezers Professional ESD Type PSF 130mm, PSF (32325)	
SMD tweezers Professional ESD Type 13 120mm, 13 (32340)	
SMD tweezers Professional ESD Type 59 117mm, 59 (32344)	

INFOBOX:

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Diagonal cutters Professional ESD

narrow, pointed head with bevelled edge — **Z 40 1 04**

Order-No.	mm			Ø mm	SB	
26808	115	4 ½	7	0.6		5
27442	115	4 ½	7	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head with bevelled edge — **Z 41 1 04**

Order-No.	mm			Ø mm	SB	
26816	115	4 ½	7	1		5
27444	115	4 ½	7	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, pointed head without bevelled edge — **Z 40 3 04**

Order-No.	mm			Ø mm		
33521	115	4 ½	2	1		5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head without bevelled edge — **Z 41 3 04**

Order-No.	mm			Ø mm	SB	
26821	115	4 ½	2	1		5
27445	115	4 ½	2	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, pointed head with small bevelled edge — **Z 40 4 04**

Order-No.	mm			Ø mm	SB	
26814	115	4 ½	2	1		5
27443	115	4 ½	2	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head and wire trapping spring with small bevelled edge — **Z 41 4 04**

Order-No.	mm			Ø mm	SB	
26822	115	4 ½	2	1.2		5
27446	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, semi-rounded head with small bevelled edge — Z 43 1 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26826	115	4 ½	2	1.2		5
27447	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Oblique end cutting nippers Professional ESD

wide head, approx. 29° with small bevelled edge — Z 46 1 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26835	115	4 ½	2	1.2		5
27450	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, semi-rounded head with bevelled edge — Z 44 1 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26831	115	4 ½	7	1		5
27448	115	4 ½	7	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Oblique end cutting nippers Professional ESD

narrow head, approx. 40° with small bevelled edge — Z 46 4 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26838	110	4 ¼	2	0.6		5
27451	110	4 ¼	2	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, semi-rounded head with small bevelled edge — Z 44 3 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26832	115	4 ½	2	1.2		5
27449	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

End cutting nippers Professional ESD

narrow head with small bevelled edge — Z 47 1 04

Order-No.	mm	⇈	✂	Ø mm	SB	
26839	110	4 ¼	2	0.6		5
27452	110	4 ¼	2	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

End cutting nippers Professional ESD

wide head with small bevelled edge — **Z 47 2 04**

Order-No.	mm		Ø mm	SB	
26840	115	4 ½	2	1.4	5
27453	115	4 ½	2	1.4	x 5

DIN ISO 9654. IEC 61340-5-1.

Round-nose pliers Professional ESD

Short, rounded jaws — **Z 37 0 04**

Order-No.	mm		SB	
26804	120	4 ¾		5
27440	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Needle nose pliers Professional ESD

straight — **Z 36 0 04**

Order-No.	mm		A	B	D	F	
26799	120	4 ¾	9,5	23	6,5	1,4	5
27329	120	4 ¾	9,5	23	6,5	1,4	5
27905	145	5 ¾	12,0	40	7,5	2,0	5

DIN ISO 9655. IEC 61340-5-1.

Flat-nose pliers Professional ESD

Short, flat jaws — **Z 38 0 04**

Order-No.	mm		SB	
26806	120	4 ¾		5
27441	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Needle nose pliers Professional ESD

curved form, approx. 45° — **Z 36 1 04**

Order-No.	mm		SB	
26802	120	4 ¾		5
27439	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Diagonal cutters Electronic

wide, pointed head without bevelled edge

Z 41 1 03

Order-No.	mm			Ø mm	SB	
26818	130	5 1/8	3	1.3		5
27391	130	5 1/8	3	1.3	x	5

Diagonal cutters Electronic

very narrow, pointed head without bevelled edge

Z 40 0 03

Order-No.	mm			Ø mm	SB	
26812	128	5	2	0.8		5
27388	128	5	2	0.8	x	5

Diagonal cutters Electronic

wide, pointed head with small bevelled edge

Z 41 3 03

Order-No.	mm			Ø mm	SB	
26815	135	5 1/4	8	0.8		5
27393	135	5 1/	8	0.8	x	5

DIN ISO 9654.

Diagonal cutters Electronic

narrow, pointed head and wire trapping spring without bevelled edge

Z 40 1 03

Order-No.	mm			Ø mm	SB	
26813	126	5	2	1		5
27390	126	5	2	1	x	5

Diagonal cutters Electronic

wide, pointed head and wire trapping spring without bevelled edge

Z 41 6 03

Order-No.	mm			Ø mm	SB	
26825	130	5 1/8	3	1.3		5
27395	130	5 1/8	3	1.3	x	5

Oblique cutting nippers Electronic

wide, pointed head without bevelled edge

Z 46 0 03

Order-No.	mm			Ø mm	SB	
26833	128	5	3	1.3		5
27398	128	5	3	1.3	x	5

Oblique end cutting nippers Electronic

very narrow, short head without bevelled edge — **Z 46 0 03**

Order-No.	mm	II	✂	Ø mm	SB	
26830	125	5	2	0.6		5
27397	125	5	2	0.6	x	5

Needle nose pliers Electronic

narrow, short head straight form — **Z 36 0 03**

Order-No.	mm	II	SB	
26801	150	6		5
27326	150	6	x	5

Needle nose pliers Electronic

Narrow, long head, curved about 40° — **Z 36 1 03**

Order-No.	mm	II	SB	
41015	142	5 1/2		5
41222	142	5 1/2	x	5

Stripping pliers Electronic

Stripping points 0.8-2.6 mm — **Z 49 2 03**

Order-No.	mm	II	mm²	AWG	SB	
33471	165	6 ½	0,81-2,59	20-10		5
36794	165	6 ½	0,81-2,59	20-10	x	5

Stripping pliers Electronic

Stripping points 0.4-1.3 mm — **Z 49 7 03**

Order-No.	mm	II	mm²	AWG	SB	
33472	165	6 1/2	0,4-1,3	26-16		5
35820	165	6 1/2	0,4-1,3	26-16	x	5

Universal tweezers Professional ESD

Type AA

ZP 01 0 14

Order-No.	mm	Typ	
32318	130	AA	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type GG

ZP 06 0 14

Order-No.	mm	Typ	
32347	130	GG	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type PSF

ZP 07 1 14

Order-No.	mm	Typ	
32325	130	PSF	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type SS

ZP 09 0 14

Order-No.	mm	Typ	
32326	135	SS	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 00

ZP 11 0 14

Order-No.	mm	Typ	
32327	120	00	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 2a

ZP 15 0 14

Order-No.	mm	Typ	
32329	120	2a	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 3c

ZP 16 0 14

Order-No.	mm	Typ	
32346	110	3c	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 5

ZP 18 0 14

Order-No.	mm	Typ	
32334	110	5	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 7a

ZP 20 1 14

Order-No.	mm	Typ	
32335	120	7a	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 13

ZP 25 2 14

Order-No.	mm	Typ	
32340	120	13	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 7abb

ZP 20 2 14

Order-No.	mm	Typ	
32336	120	7abb	10

IEC 61340-5-1.

Universal tweezers Professional ESD

Type 40

ZP 46 0 14

Order-No.	mm	Typ	
32343	145	40	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 12

ZP 24 0 14

Order-No.	mm	Typ	
32338	120	12	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 59

ZP 50 0 14

Order-No.	mm	Typ	
32344	117	59	10

IEC 61340-5-1.

The cutting capacities for our pliers.

Soft wire
Plastic/ copper/ aluminium electrical cable/electrical cable/ silver wire

1 2 3 4 5 6 7 8 9 10

Diagonal cutters for plastic



Diagonal cutters Electronic

Oblique cutting nippers Electronic



Electronic micro oblique end cutting nippers

Electronic micro diagonal cutters

ESD end cutting nippers

ESD oblique end cutting nippers

ESD diagonal cutters

Precision mechanic's needle nose pliers

Precision mechanic's diagonal cutters

Electronic diagonal cutters with bevelled edge

ESD diagonal cutters with bevelled edge

Cutting capacities for pliers are practice-based values for guidance

Hard wire

11 12 13 14 15 16 17 18 19 20 21

TriCut installation pliers



Electrician's diagonal cutters



Pincers

Inomic® combination pliers

Inomic® needle nose pliers

Lineman's pliers



BiCut® Diagonal cutters 100 %/ 200 %



Heavy-duty Monier pliers



High-leverage combination pliers



Combination pliers



Diagonal cutters



Heavy-duty diagonal cutters



End cutting nippers

Monier pliers

Needle nose pliers

Bent needle nose pliers



Values may vary depending on leverage, material thickness and the specific product application.

Striking and measuring tools.
Optimum force transmission

With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Removing nails and nail clamps as well as fixing cables and dowels into position without causing damage become extremely simple tasks. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time without making a mess, unlike power tools.

Wiha measuring tools prove to be further dependable helpers during electrical installation work. The Wiha electrician's spirit level allows users to easily mark spaces for up to four flush boxes. This spirit level stands out due to its effortless dimension measurement and perfectly visible bubbles.

Impact tools

Soft-faced hammer set Safety with assorted hammer faces, 8-pcs. in box
Page 294

Soft-faced hammer Safety soft/medium hard with hickory wooden handle, round hammer face
Page 295

Soft-faced hammer dead-blow, medium hard with hickory wooden handle, round hammer face
Page 296

Soft-faced hammer dead-blow, medium hard With steel tube handle, round hammer face
Page 299

Electrician's hammer with 300 g hammer head, in blister pack
Page 301

SoftFinish® dowel racket set with dowels Phillips with 6 mm round blade in blister pack, 5-pcs.
Page 301

Measurement tools

Electrician's spirit level 40 cm
Page 302



Callipers digiMax digital Reading 0.01 mm
Page 302

Electrician's Longlife® folding ruler, 2 m metric, 10 segments
Page 303

Folding ruler LongLife Plus Composite 2 m metric, 10 segments
Page 303

Soft-faced hammer set Safety

with assorted hammer faces, 8-pcs. in box **832 B8**

Order-No.			
28050		x	1
	1 x Hickory wooden handle for safety soft-faced hammer		
	1 x Hammer face soft Round for soft-faced safety hammer		
	2 x Hammer face medium soft Round for soft-faced safety hammer		
	1 x Hammer face medium hard Round for soft-faced safety hammer		
	1 x Hammer face hard Round for soft-faced safety hammer		
	1 x Hammer face very hard Round for soft-faced safety hammer		
	1 x Hammer face soft Square for safety soft-faced hammer		
	1 x Hammer face medium hard Square for safety soft-faced hammer		
	1 x Hammer housing set with screw and locknut for Safety soft-faced hammer		
◉	1 x L-keys Hexagonal ball end matt chrome-plated		

INFOBOX:

Colour code system for Wiha hammer faces

Safety note:

- Always wear safety glasses and safety gloves when working with soft-faced hammers. Please observe the applicable national standards and regulations.
- Please observe the following tightening torques when replacing heads or handles:

Size 30 = 20 Nm
Size 40 = 40 Nm
Size 50 = 70 Nm
Size 60 = 70 Nm
Size 80 = 80 Nm

Hammer face	Range of uses
soft (blue)	for sensitive materials, such as those in furniture and interior construction, minor assembly. Material: elastomer.
medium soft (black)	for robust work, such as paving, tiling, dry wall installation. Material: rubber.
medium hard (yellow)	universal use, such as for tool and machine manufacture, car repairs, sheet metal and assembly work. Material: polyurethane.
hard (orange)	for high stress mechanical tasks such as assembly and dismantling work, building and construction work, repair work. Material: cellulose acetate.
very hard (white)	for high impact work, heavy industry and construction, mould construction, road construction, horticulture and landscaping. Material: polyamide.

Soft-faced hammer Safety soft/medium soft

with hickory wooden handle, round hammer face **832-13**

Order-No.	●↕	g			
26649	30	289	87	290	5
26650	40	637	110	325	5
26651	50	1117	131	360	2
26652	60	1636	150	400	2

Soft-faced hammer Safety medium soft/medium soft

with hickory wooden handle, round hammer face **832-33**

Order-No.	●↕	g			
26509	30	548	87	290	5
26431	40	640	110	325	5
26432	50	1130	131	360	2
26433	60	1692	150	400	2
26439	80	3136	185	490	2

Soft-faced hammer Safety soft/medium hard

with hickory wooden handle, round hammer face **832-15**

Order-No.	●↕	g			
26653	30	272	87	290	5
26654	40	620	110	325	5
26655	50	1077	131	360	2
26656	60	1555	150	400	2

Soft-faced hammer Safety medium soft/medium hard

with hickory wooden handle, round hammer face **832-35**

Order-No.	●↕	g			
26434	30	295	87	290	5
26435	40	636	110	325	5
26436	50	1041	131	360	2
26437	60	1632	150	400	2

Soft-faced hammer Safety soft/medium hard

With hickory wooden handle, square hammer face **834-15**

Order-No.	■↕	g			
26662	40	611	110	325	5

Soft-faced hammer Safety medium soft/hard

with hickory wooden handle, round hammer face **832-38**

Order-No.	●↕	g			
26611	30	306	87	290	5
26612	40	621	110	325	5
26613	50	1103	131	360	2
26614	60	1264	150	400	2

Soft-faced hammer Safety medium hard/medium hard

with hickory wooden handle, round hammer face **832-55**

Order-No.	●↕	g			
26640	30	296	87	290	5
26641	40	609	110	325	5
26642	50	1200	131	360	2
26643	60	1638	150	400	2

Soft-faced hammer Safety medium soft/very hard

with hickory wooden handle, round hammer face **832-39**

Order-No.	●↕	g			
26657	30	314	87	290	5
26658	40	649	110	325	5
26659	50	1099	131	360	2
26660	60	1682	150	400	2
26582	80	3090	185	490	2
26661	80L•	3324	185	840	2

• Sledgehammer

Soft-faced hammer Safety very hard/very hard

with hickory wooden handle, round hammer face **832-99**

Order-No.	●↕	g			
26644	30	299	87	290	5
26645	40	602	110	325	5
26646	50	1128	131	360	2
26647	60	1637	150	400	2
26648	80	3186	185	490	2
26674	80L•	3284	185	840	2

• Sledgehammer

Hammer face soft

Round for soft-faced safety hammer

831-1

Order-No.	●↕	g	
26663	30	20.5	5
26664	40	44	5
26665	50	83.5	2
26666	60	136	2

Hammer face medium hard

Round for soft-faced safety hammer

831-5

Order-No.	●↕	g	
26427	30	28.2	5
26428	40	58.5	5
26429	50	117	2
26430	60	189	2

Hammer face soft

Square for safety soft-faced hammer

833-1

Order-No.	■↕	g	
26673	40	49.5	5

Hammer face medium hard

Square for safety soft-faced hammer

833-5

Order-No.	■↕	g	
26438	40	67	5

Hammer face medium soft

Round for soft-faced safety hammer

831-3

Order-No.	●↕	g	
26422	30	30.6	5
26423	40	78	5
26424	50	129.5	2
26425	60	229	2
26426	80•	479	2

• Also for sledgehammers

Hammer face hard

Round for soft-faced safety hammer

831-8

Order-No.	●↕	g	
26615	30	25.5	5
26616	40	53.5	5
26618	50	53	2
26620	60	182.5	2

Hammer face very hard

Round for soft-faced safety hammer

831-9

Order-No.	●↕	g	
26510	30	26.8	5
26511	40	57.4	5
26512	50	112	2
26513	60	191	2
26514	80•	395	2

• Also for sledgehammers

Hammer housing set

with screw and locknut for Safety soft-faced hammer

829-0

Order-No.	●↕	g	
26668	30	159	1
26669	40	375	1
26670	50	709	1
26671	60	1017	1
26672	80•	1894	1

• Also for sledgehammers
• You will find detailed instructions on replacing at www.wiha.com

Hickory wooden handle

for safety soft-faced hammer

830-0

Order-No.	●↕	↔	g	
26417	30	260	93	5
26418	40	280	119	5
26419	50	310	190	2
26420	60	340	202	2
26421	80	400	302	2
26667	80L•	800	601	1

• for sledgehammer
• You will find detailed instructions on replacing at www.wiha.com

Soft-faced hammer dead-blow, very hard

with hickory wooden handle, round hammer face — **8001**

Order-No.	●↕	g			
39008	30	444	115	350	5
39010	40	750	125	375	5
39012	50	1040	135	385	2
39014	60	1700	165	420	2

Soft-faced hammer dead-blow, medium hard

with hickory wooden handle, round hammer face — **800**

Order-No.	●↕	g			
02092	25	300	108	320	5
02093	30	436	115	350	5
02094	35	543	118	355	5
02095	40	736	125	375	5
02096	45	848	130	380	2
02097	50	1085	135	385	2
02098	60	1710	165	420	2
02099	70	2256	165	430	2

Sledgehammer no recoil, medium hard

with hickory wooden handle, round hammer face — **800**

Order-No.	●↕	g			
02101	80	4580	205	880	2
02091	100	6880	210	1000	1

Soft-faced hammer dead-blow, very hard

With steel tube handle, round hammer face — **8021**

Order-No.	●↕	g			
39017	30	556	115	290	5
39019	40	792	125	305	5
39021	50	1276	135	365	2
39022	60	1868	165	375	2

Soft-faced hammer dead-blow, medium hard

With steel tube handle, round hammer face — **802**

Order-No.	●↕	g			
02122	25	461	108	288	5
02123	30	558	115	290	5
02124	35	659	118	300	5
02125	40	791	125	305	5
02126	45	935	130	310	2
02127	50	1277	135	365	2
02128	60	1879	165	375	2
02129	70	2571	165	385	2

Hickory wooden handle

for dead-blow soft-faced hammer **800S**

Order-No.	●↕		g	
02113	25	295	63	10
02114	30/35	320	105	10
02115	40/45	335	142	10
02116	50	335	145	10
02117	60/70	360	192	5
28051	80•	800	792	1
28052	100•	900	1017	1

• You will find detailed instructions on replacing at www.wiha.com

Hammer face very hard

Round for soft-faced no-recoil hammer **8001K**

Order-No.	●↕	g	
39149	30	17.4	1
39150	40	69	1
39151	50	67	1
39152	60	115	1

Hammer face medium hard

Round for soft-faced no-recoil hammer **800K**

Order-No.	●↕	g	
02103	25	13.17	10
02104	30	18.4	10
02105	35	26	10
02106	40	37.5	10
02107	45	52.5	5
02108	50	72	5
02109	60	119	5
02110	70	166	5
02111	80	239	2
02102	100	394	2

INFOBOX:

No-recoil soft-faced hammer

- The special metal filling in the hammer head prevents recoil.
- Approx. 25% more hammer head mass provides additional power.
- Preserves delicate surfaces and edges through high-impact effect.

SoftFinish® dowel racket set with dowels

Phillips with 6 mm round blade in blister pack, 5-pcs. **SB 534S5**

Order-No.			
41289		x	1
	1 x PH2		
	2 x 30 mm Dowel / 2 x 40 mm Dowel		

Electrician's hammer

with 300 g hammer head, in blister pack **846**

Order-No.				
42071	23,9	283	500	4

INFOBOX:
SoftFinish® dowel racket set with dowels

- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

INFOBOX:
Electrician's hammer

- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-to-access spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

Electrician's spirit level

40 cm **246**

Order-No.	mm	g	
42074	400	330	10

Callipers digiMax digital

Reading 0.01 mm **411 170 1**

Order-No.			g	
29422	150	6	139	1

CE compliant.

Callipers caliMax®

Reading 0.1 mm **411 320 3**

Order-No.			g	
27083	150	6	74	1

Analogue callipers dialMax

Reading 0.1 mm **411 210 2**

Order-No.			g	
27082	150	6	104	1

Analogue callipers dialMax ESD

Reading 0.1 mm **411 210 8**

Order-No.			g	
31439	150	6	96	1

IEC 61340-5-1.

INFOBOX:

Electrician's spirit level, 40 cm

- Quick, easy marking of positions for up to four flush boxes in just one simple work step thanks to the integrated marking points.
- The continuous housing allows users to mark lines without interruption.
- An additional scale on the upper surface ensure precise measurement even when viewing from above.
- The bubbles are clearly visible, even from a sharp angle.
- The level is perfectly suitable for portable use thanks to its compact design.

Electrician's Longlife® folding ruler, 2 m

UV

metric, 10 segments — 4102008

Order-No.				
42068	15	orange	135	10

Folding ruler LongLife Plus Composite 2 m

metric, 10 segments — 410 2005

Order-No.				
37067	15	red/ black	124	10

Folding ruler Longlife All in One 2 m

metric, 10 segments — 410 2007

Order-No.				
33232	15	white	139	10

INFOBOX:

Longlife® Plus composite folding ruler

- High rigidity minimises risk of breakage.
- Tight 90° and 180° latching of all joints.
- Metal ends which cannot be lost on the first and last segment.
- Scale running backwards (recto and verso) enables reading from both sides.

Folding ruler LongLife Plus 2 m

metric, 10 segments — 410 2001

Order-No.				
27055	15	yellow	136	10
27059	15	white	136	10

Folding ruler Longlife 2 m

metric, 10 segments — 410 2000

Order-No.				
27058	15	yellow	137	10
27057	15	white	136	10

Folding ruler Longlife 1 m



metric, 10 segments — 410 1000

Order-No.				
27061	13	yellow	43	10
27062	13	white	43.5	10

Which drives are used for each individual product?
Screwdrivers, torque tools

Screwdrivers

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Screwdriver SoftFinish®	●	●		●		●	●	●
SoftFinish® screwdriver with fixing function	●	●						
SoftFinish® screwdriver with mm scale	●	●		●				
SoftFinish® Stubby screwdriver	●	●		●				
Screwdriver MicroFinish®	●	●		●		●		
Pocket screwdrivers	●							
PicoFinish® fine screwdriver	●	●		●		●		●
Screwdriver SoftFinish® electric slimFix	●	●	●	●	●	●	●	
Screwdriver SoftFinish® electric	●	●	●	●	●	●		
Bit slimBit electric	●	●	●	●	●	●		
PicoFinish® electric fine screwdriver	●	●						
Voltage tester	●							
Screwdriver SoftFinish® ESD	●	●		●		●		
SoftFinish® ESD Stubby screwdriver	●	●		●				
Screwdriver Precision ESD	●	●		●		●		●

Torque tools

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Variably adjustable torque screwdriver	●	●		●		●		●
Torque screwdriver firmly pre-set	●	●		●		●		●
Electric torque screwdriver	●	●	●	●	●	●		
Bit slimBit electric	●	●	●	●	●	●		
Torque screwdriver with T-handle						●		●
TorqueFix® torque screwdriver with key handle						●		●

internal hexagon	Hex	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
•	•				•							
	•											
•	•										•	•
		•										
•	•	•										
•		•										
•	•											

internal hexagon	Hex	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
•	•											
•	•											
•		•										
•		•										
•												
•												

Which drives are used for each individual product?
Multi-tools, L-keys, bits

Multitools

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Screwdriver with bit magazine LiftUp electric	●	●		●	●	●		
Screwdriver with bit magazine LiftUp 26one®	●	●		●		●		
Screwdriver with LiftUp 25 magnetic bit magazine	●	●		●		●		
Screwdriver with bit magazine	●	●		●		●		
Stubby screwdriver with telescopic bit magazine	●	●		●		●		
Multitool PocketStar L-key	●	●				●	●	
Screwdriver with interchangeable blade SYSTEM 6	●	●		●		●	●	
Screwdriver with interchangeable blade SYSTEM 4	●	●		●		●		

L-keys

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
L-keys						●	●	●
L-key set in ErgoStar holder						●		
L-key set in ProStar holder						●		
L-key set in Compact holder								
L-key set in Classic holder						●	●	●
L-key with T-handle ComfortGrip						●		
L-key with Classic T-handle						●		●
L-key with T-handle electric								
L-key with key handle						●		●
L-key with flag handle						●		●

Bits

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
TY-Bit		●		●		●		
T-Bit		●		●		●		
Y-Bit		●		●		●		
Bit Standard	●	●		●		●	●	●
Bit Professional	●	●	●	●	●	●	●	●
Bits with MagicRing®								
Bit with thread		●		●		●		
Standard bit in C4 size	●	●				●		

internal hexagon	Hex	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
•		•										
•												
•												
•	•						•	•				
•	•											

internal hexagon	Hex	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
•												
•												
•												
•												
•												
•												
•	•		•									
•	•											
•												

internal hexagon	Hex	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
•												
•		•										
•		•		•		•	•	•	•	•		
•		•						•				
•												
•	•										•	

Wiha order number register

Order-No.	
00	
00456	141
00576	193
00577	193
00578	193
00579	193
00580	193
00582	193
00583	193
00584	193
00585	193
00586	193
00587	193
00597	193
00598	193
00599	193
00600	193
00601	193
00602	193
00603	193
00610	191
00613	191
00616	191
00623	187
00629	190
00630	190
00631	190
00632	190
00635	190
00636	190
00637	190
00638	190
00639	190
00654	190
00655	190
00656	190
00657	190
00658	190
00665	190
00666	190
00667	190
00679	151
00683	151
00684	146
00685	146
00686	146
00687	146
00689	146
00690	146
00691	146
00692	146
00694	146
00695	146
00696	146
00697	146
00698	146
00700	146
00701	146
00702	146
00703	146
00704	146
00706	146
00707	146
00708	146
00709	146
00711	146
00712	146
00713	146
00731	151

Order-No.	
00732	151
00733	151
00734	151
00735	151
00736	151
00737	151
00738	151
00739	151
00740	151
00754	146
00756	146
00757	146
00759	146
00760	146
00762	146
00763	146
00764	151
00765	151
00766	151
00767	151
00768	146
00770	146
00772	146
00774	146
00776	151
00777	151
00778	151
00779	151
00819	139
00820	139
00821	139
00822	139
00823	139
00824	139
00825	139
00826	139
00827	139
00828	139
00829	139
00830	139
00831	139
00832	139
00833	135
00834	135
00846	139
00847	139
00848	139
00849	139
00850	139
00853	140
00855	140
00856	140
00857	140
00858	140
00859	140
00860	140
00861	140
00862	140
00863	140
00864	140
00865	140
00866	140
00867	140
00868	140
00877	139
00878	139
00879	139
00880	139
00881	139

Order-No.	
00882	139
00894	218
00895	218
00896	218
00897	218
00904	214
00905	214
00906	214
00907	214
00908	214
00909	214
00910	214
00911	214
00912	214
00913	214
00914	214
00915	214
00916	214
00917	214
00918	214
00919	214
00921	214
00922	214
00923	214
00924	214
00926	214
00928	214
00929	214
00930	214
00931	214
00933	214
00934	214
00937	214
00953	205
00965	215
00966	215
00967	215
00968	215
00969	215
00970	215
00971	215
00972	215
00973	215
00974	215
00975	215
00977	215
00978	215
00979	215
00980	215
00982	215
00983	215
00985	215
00986	215
00988	215
00989	215
00990	215
00991	215
00993	215
00994	215
00995	215
01	
01005	215
01006	215
01007	215
01008	215
01018	148
01020	148
01021	148
01022	148

Order-No.	
01023	148
01024	148
01025	148
01026	148
01027	148
01028	148
01029	148
01030	148
01031	148
01032	148
01033	148
01034	143
01076	148
01077	148
01078	148
01079	148
01081	148
01092	149
01093	149
01094	149
01095	149
01096	149
01097	149
01098	149
01121	210
01122	210
01123	210
01124	210
01126	210
01128	210
01130	210
01131	210
01132	210
01133	210
01134	210
01135	210
01136	210
01137	210
01138	210
01139	210
01140	210
01141	210
01142	210
01143	210
01285	147
01286	147
01287	147
01288	147
01289	147
01290	147
01291	147
01292	147
01293	147
01294	147
01295	147
01296	147
01297	147
01299	142
01300	147
01301	147
01302	147
01303	147
01304	147
01305	147
01306	147
01310	211
01311	211
01312	211
01313	211

Order-No.	
01314	211
01315	211
01316	211
01317	211
01318	211
01319	211
01320	211
01321	211
01322	211
01323	211
01324	211
01326	205
01328	217
01329	217
01330	217
01331	217
01332	217
01333	217
01334	217
01335	217
01336	217
01337	217
01338	217
01339	217
01340	217
01341	217
01343	217
01345	217
01348	205
01350	218
01351	218
01352	218
01353	218
01354	218
01355	218
01356	218
01391	209
01392	208
01393	208
01395	208
01396	208
01398	208
01400	208
01402	208
01404	208
01406	208
01408	208
01416	199
01418	199
01420	199
01422	209
01423	209
01424	209
01425	209
01426	209
01427	209
01428	209
01429	209
01430	209
01431	209
01432	209
01433	209
01434	209
01435	149
01436	149
01437	149
01438	149
01439	149
01440	149

Order-No.	
01443	149
01475	248
01476	248
01479	248
01481	249
01508	154
01537	154
01538	154
01539	154
01548	154
01623	231
01624	231
01626	231
01627	231
01649	231
01657	231
01658	231
01659	231
01681	231
01688	231
01689	231
01690	231
01703	232
01704	232
01705	232
01706	232
01707	232
01708	232
01709	232
01710	232
01711	231
01712	231
01713	231
01714	231
01715	231
01716	231
01717	231
01718	231
01719	231
01720	231
01721	231
01722	231
01723	231
01724	231
01726	231
01727	231
01728	231
01729	231
01730	231
01731	231
01732	231
01733	231
01734	232
01735	232
01736	232
01737	232
01738	232
01739	232
01740	232
01790	236
01791	236
01792	236
01793	236
01794	236
01795	236
01796	236
01798	236
01799	236
01800	236

Order-No.	
01803	236
01805	236
01808	237
01809	237
01811	237
01812	237
01894	247
01895	247
01910	247
01912	247
01913	247
01919	248
01922	245
01923	245
01924	245
01926	245
01927	245
01930	245
01933	244
01935	245
01937	243
01938	243
01939	243
01940	243
01942	243
01943	243
01945	243
01946	243
01947	243
01948	243
02	
02091	299
02092	299
02093	299
02094	299
02095	299
02096	299
02097	299
02098	299
02099	299
02101	299
02102	300
02103	300
02104	300
02105	300
02106	300
02107	300
02108	300
02109	300
02110	300
02111	300
02113	300
02114	300
02115	300
02116	300
02117	300
02122	299
02123	299
02124	299
02125	299
02126	299
02127	299
02128	299
02129	299
02292	199
02568	154
02802	216
02803	216
02804	216

Order-No.	
02805	216
02806	216
02807	216
02808	216
02809	216
02810	216
02811	216
02819	216
02820	216
02821	216
02822	216
02823	216
02824	216
02836	148
02837	148
02838	148
02839	148
02840	148
02841	148
02939	199
03	
03106	147
03107	147
03108	147
03115	231
03117	231
03186	193
03223	150
03224	150
03225	150
03226	150
03228	150
03230	150
03231	150
03232	150
03237	150
03238	150
03239	150
03245	150
03246	150
03247	150
03591	187
03723	199
03724	218
03725	218
03726	218
03727	218
03728	218
03729	218
03730	218
03731	218
03738	146
03739	146
03760	139
03761	139
03762	139
03764	211
03847	157
03848	157
03849	157
03850	157
03851	157
03852	157
03853	157
03854	157
03868	209
03869	209
03870	209
03871	209

Wiha order number register

Order-No.	
03872	209
03873	209
03874	209
03875	209
03876	209
03878	199
03879	199
03882	190
03883	190
03988	156
03991	199
03992	199
04	
04009	236
04010	236
04011	232
04059	237
04096	214
04099	214
04105	214
04108	214
04111	214
04126	236
04127	236
04176	237
04194	239
04195	239
04196	239
04197	239
04198	239
04204	244
04362	245
04508	244
04509	244
04510	244
04511	244
04512	244
04513	244
04514	244
04515	244
04516	244
04517	244
04631	244
04632	244
04633	244
04634	244
04635	244
04636	244
04637	244
04638	244
04639	244
04640	244
04670	243
04671	243
04677	243
04678	243
04684	245
04685	245
04918	218
04925	231
04926	231
04927	231
04928	231
04929	231
04930	231
04931	231
05	
05271	141
05298	231

Order-No.	
05300	231
05301	239
05302	239
05303	239
05638	209
05799	237
05800	236
06	
06059	209
06218	210
06358	209
06359	209
06360	209
06361	209
06362	209
06363	209
06364	209
06365	209
06366	209
06367	209
06368	209
06369	209
06370	209
06371	209
06378	200
06379	200
06382	200
06384	200
06386	200
06634	232
06635	232
06636	232
06637	239
06638	239
06639	239
06888	236
06889	237
07	
07152	142
07153	142
07155	142
07185	198
07192	198
07634	159
07635	159
07636	159
07637	159
07638	159
07639	159
07640	159
07641	159
07642	159
07643	159
07644	159
07645	159
07646	159
07647	159
07648	159
07649	159
07650	159
07651	159
07652	159
07653	159
07654	159
07655	159
07656	159
07657	159
07658	159
07659	159

Order-No.	
07660	159
07661	159
07662	159
07663	159
07664	159
07665	159
07666	159
07667	158
07855	234
07856	234
07857	234
07858	234
07859	234
07860	234
07861	234
07862	234
07865	234
07866	234
07869	247
07874	240
07875	240
07922	208
07943	229
08	
08047	235
08048	235
08049	235
08056	235
08057	235
08058	235
08065	235
08066	235
08067	235
08068	235
08069	235
08070	235
08179	158
08182	158
08183	158
08184	158
08185	158
08186	158
08419	240
08420	240
08421	234
08422	234
08423	234
08424	234
08425	234
08426	234
08463	157
08900	190
08901	190
08902	190
08903	190
08904	190
08905	190
08906	190
08907	190
08908	190
08909	190
08911	190
09	
09393	230
20	
20218	238
20219	238
20220	238
20221	238

Order-No.	
20222	238
20223	238
20224	238
20542	234
20549	207
20550	207
20551	207
20552	207
20553	207
20554	186
20555	232
20556	232
20557	232
20558	232
20559	232
20560	232
20570	207
20783	186
21	
21045	238
21047	238
21248	143
21249	143
21250	144
21251	144
21255	159
21256	159
21960	214
21962	214
22	
22096	205
22168	214
22170	214
22172	214
22174	214
22436	158
22509	236
22510	236
22511	236
22512	237
22591	232
22592	232
22593	232
22594	232
22595	232
22596	239
22597	239
22598	239
22599	239
22600	239
22603	233
22604	233
22605	233
22606	233
22607	233
22608	233
22651	234
22653	234
22655	234
22955	232
22956	232
22957	232
22958	232
22959	232
22960	232
22961	232
22962	232
23	
23031	185

Order-No.	
23033	185
23035	185
23037	185
23040	185
23041	185
23047	183
23049	183
23051	184
23053	184
23145	238
23147	238
23149	238
23151	238
23159	154
23173	231
23175	231
23177	231
23179	231
23181	231
23183	231
23185	231
23187	231
23189	231
23191	231
23193	231
23195	238
23197	238
23199	238
23201	238
23203	238
23205	238
23207	238
23209	238
23211	238
23213	236
23215	236
23217	236
23219	236
23221	237
23223	237
23225	237
23226	237
23227	237
23228	237
24	
24107	212
24109	212
24111	212
24113	212
24115	212
24117	212
24119	212
24121	212
24123	212
24189	198
24302	207
24303	207
24304	207
24305	207
24306	207
24307	207
24308	207
24312	203
24313	211
24314	211
24315	211
24316	211
24317	211
24318	211

Order-No.	
24319	211
24320	211
24321	211
24322	211
24323	211
24324	211
24325	211
24341	207
24506	142
24513	212
24515	212
24517	212
24519	212
24521	212
24523	212
24525	212
24527	212
24529	212
24531	212
24533	212
24733	234
24742	234
24746	234
24748	234
24851	198
24852	203
24867	238
25	
25097	231
25128	184
25130	184
25164	184
25166	184
25293	183
25295	183
25477	135
25553	238
25560	232
25561	232
25562	232
25563	232
25564	232
25572	232
25624	206
25625	206
25676	159
25677	159
25679	234
25681	234
25739	238
25740	238
25741	238
25742	238
25874	248
25994	231
25996	231
25998	231
26	
26000	238
26002	238
26045	232
26047	169
26048	169
26049	169
26051	169
26052	169
26053	169
26058	170
26059	170

Order-No.	
26060	171
26061	171
26062	171
26063	171
26064	170
26065	170
26066	170
26067	170
26068	170
26069	170
26070	170
26071	170
26072	170
26073	170
26077	147
26079	147
26081	147
26083	147
26085	147
26087	147
26091	147
26093	147
26095	147
26097	147
26099	147
26101	147
26103	147
26105	147
26107	147
26109	147
26111	147
26113	142
26121	191
26122	193
26123	193
26124	193
26127	169
26128	169
26129	169
26130	169
26131	169
26133	169
26135	213
26136	213
26137	213
26138	213
26139	213
26140	213
26148	170
26151	170
26152	170
26154	170
26155	170
26156	170
26157	170
26158	170
26159	170
26164	213
26165	213
26166	213
26167	213
26168	213
26169	213
26170	213
26171	213
26172	213
26173	213
26174	213
26175	213

Order-No.	
26176	213
26177	213
26178	213
26179	249
26181	218
26182	218
26183	218
26184	218
26185	218
26186	218
26187	218
26188	218
26190	147
26191	147
26192	147
26193	147
26194	147
26195	147
26196	170
26197	170
26198	170
26199	170
26200	171
26212	149
26213	149
26214	149
26216	149
26217	149
26218	149
26221	171
26222	171
26223	171
26224	171
26225	171
26227	170
26228	170
26229	171
26230	148
26231	148
26232	148
26233	148
26234	148
26235	148
26247	204
26248	204
26249	232
26250	231
26252	230
26253	230
26259	147
26260	147
26261	206
26277	170
26278	170
26279	170
26303	147
26304	147
26305	147
26307	147
26309	232
26327	169
26328	147
26329	147
26330	147
26331	147
26332	147
26333	147
26346	232
26347	232

Wiha order number register

Order-No.	
26348	232
26349	232
26350	232
26351	232
26352	232
26353	232
26354	232
26355	232
26356	232
26417	298
26418	298
26419	298
26420	298
26421	298
26422	297
26423	297
26424	297
26425	297
26426	297
26427	297
26428	297
26429	297
26430	297
26431	295
26432	295
26433	295
26434	295
26435	295
26436	295
26437	295
26438	297
26439	295
26451	234
26454	146
26455	146
26456	147
26457	147
26458	147
26461	168
26462	168
26463	168
26464	168
26509	295
26510	298
26511	298
26512	298
26513	298
26514	298
26544	171
26582	296
26611	296
26612	296
26613	296
26614	296
26615	297
26616	297
26618	297
26620	297
26625	163
26626	163
26627	163
26629	175
26640	296
26641	296
26642	296
26643	296
26644	296
26645	296
26646	296

Order-No.	
26647	296
26648	296
26649	295
26650	295
26651	295
26652	295
26653	295
26654	295
26655	295
26656	295
26657	296
26658	296
26659	296
26660	296
26661	296
26662	295
26663	297
26664	297
26665	297
26666	297
26667	298
26668	298
26669	298
26670	298
26671	298
26672	298
26673	297
26674	296
26703	270
26704	270
26705	256
26706	270
26707	270
26708	256
26709	270
26710	270
26711	256
26712	271
26713	271
26714	256
26715	271
26716	271
26717	256
26718	272
26719	271
26720	258
26721	272
26722	271
26723	273
26724	272
26725	273
26726	272
26727	258
26728	258
26729	258
26730	274
26731	274
26732	259
26733	274
26734	274
26735	259
26736	268
26737	254
26738	269
26739	269
26740	268
26741	254
26742	269
26743	268

Order-No.	
26744	254
26745	254
26755	115
26757	276
26758	276
26759	276
26760	275
26761	275
26762	275
26763	275
26764	276
26765	276
26766	276
26767	276
26771	277
26772	277
26773	277
26774	277
26775	277
26776	277
26777	277
26778	277
26779	277
26780	277
26781	279
26782	279
26783	279
26784	279
26785	279
26786	279
26787	279
26788	279
26789	279
26790	279
26791	279
26792	279
26793	267
26794	279
26795	279
26796	279
26797	279
26799	285
26801	287
26802	285
26804	285
26806	285
26808	283
26812	286
26813	286
26814	283
26815	286
26816	283
26818	286
26821	283
26822	283
26825	286
26826	284
26830	287
26831	284
26832	284
26833	286
26835	284
26838	284
26839	284
26840	285
26845	261
26846	261
26847	260
26850	266

Order-No.	
26852	252
26853	266
26854	267
26864	171
26865	175
26866	175
26888	168
26889	170
26893	168
26901	169
26919	157
26920	154
26925	169
26928	158
26929	158
26931	146
26953	217
26954	217
26955	217
26956	217
26957	217
26958	217
26959	217
26960	217
26964	151
26965	151
26966	151
26967	151
26968	151
26969	151
26970	151
26971	151
26972	151
26973	151
27	
27028	232
27030	232
27055	303
27057	303
27058	303
27059	303
27061	303
27062	303
27064	232
27065	232
27066	232
27067	232
27077	235
27079	170
27082	302
27083	302
27144	158
27145	158
27146	158
27147	158
27148	158
27149	158
27150	158
27151	158
27252	157
27253	157
27256	232
27257	232
27258	232
27259	232
27260	232
27325	270
27326	287
27327	270

Order-No.	
27328	256
27329	285
27336	270
27337	270
27338	271
27339	271
27340	272
27341	272
27342	273
27343	273
27344	274
27345	274
27346	269
27347	269
27348	269
27350	275
27351	276
27352	279
27353	279
27354	279
27355	279
27356	279
27357	279
27358	279
27359	279
27360	279
27361	279
27362	279
27363	279
27364	279
27365	279
27366	279
27367	279
27368	261
27372	276
27373	276
27374	276
27375	277
27376	277
27377	277
27378	277
27379	277
27380	277
27381	275
27382	275
27383	276
27384	276
27388	286
27390	286
27391	286
27393	286
27395	286
27397	287
27398	286
27399	270
27400	270
27401	271
27402	271
27403	271
27404	271
27405	272
27406	272
27407	274
27408	274
27409	268
27410	268
27414	275
27415	276
27417	261

Order-No.	
27418	256
27419	256
27420	256
27421	256
27422	258
27423	258
27424	258
27425	258
27426	259
27427	259
27428	254
27429	254
27430	254
27431	254
27437	260
27439	285
27440	285
27441	285
27442	283
27443	283
27444	283
27445	283
27446	283
27447	284
27448	284
27449	284
27450	284
27451	284
27452	284
27453	285
27501	277
27502	277
27503	277
27504	277
27507	268
27526	171
27530	232
27606	154
27614	218
27615	218
27616	218
27617	218
27618	218
27619	218
27620	218
27621	218
27627	190
27628	190
27629	190
27630	190
27631	190
27632	190
27633	190
27634	190
27635	190
27636	190
27637	190
27638	190
27639	190
27641	158
27687	175
27707	159
27708	159
27712	188
27713	188
27715	188
27736	146
27737	146
27738	146

Order-No.	
27739	146
27740	146
27741	146
27742	146
27743	146
27744	146
27745	146
27746	142
27748	159
27749	159
27750	159
27751	159
27752	159
27753	146
27754	146
27755	146
27756	146
27757	146
27758	146
27759	159
27761	159
27762	159
27763	159
27764	159
27765	159
27766	159
27767	159
27811	146
27812	170
27813	170
27814	170
27815	170
27816	170
27817	170
27818	170
27820	191
27873	243
27876	243
27877	243
27879	243
27880	243
27882	243
27883	243
27884	243
27885	243
27886	243
27887	243
27888	243
27889	243
27890	243
27891	243
27892	244
27893	244
27894	244
27895	244
27896	244
27897	244
27898	244
27899	244
27900	244
27901	244
27902	154
27905	285
27928	216
27929	216
27930	216
27931	216
27932	216
27933	216

Order-No.	
27934	216
27935	216
27936	183
27963	244
27964	217
27965	217
27966	217
27967	217
27968	217
27969	217
27970	217
27971	217
28	
28005	147
28026	243
28027	244
28050	294
28051	300
28052	300
28053	159
28055	243
28056	243
28057	243
28058	244
28198	159
28330	264
28372	213
28373	213
28374	213
28375	213
28376	213
28377	213
28402	280
28481	238
28691	165
28691	173
28734	173
28735	173
28736	173
28737	173
28738	173
28739	173
28740	173
28741	173
28742	173
28743	173
28744	173
28745	173
28746	173
28747	173
28748	173
28749	173
28756	173
28757	173
28758	173
28760	147
28761	147
28762	147
28763	147
28764	147
28765	147
28766	147
28767	147
28769	147
28770	147
29	
29115	155
29116	155
29117	155

Wiha order number register

Order-No.	
29118	155
29119	155
29120	155
29121	155
29122	155
29123	155
29124	155
29125	155
29133	156
29134	156
29135	156
29136	156
29137	156
29138	155
29139	155
29140	155
29141	155
29142	155
29143	155
29144	155
29145	155
29149	156
29150	156
29151	156
29152	156
29153	156
29154	156
29158	156
29159	156
29160	156
29161	156
29162	156
29163	156
29164	156
29165	156
29166	156
29167	156
29168	156
29169	155
29170	156
29171	156
29172	156
29173	156
29174	156
29175	156
29176	156
29177	156
29197	212
29198	212
29199	212
29200	212
29201	212
29202	212
29203	212
29204	212
29205	212
29206	212
29207	212
29208	204
29228	172
29229	172
29230	172
29231	172
29232	172
29233	172
29234	172
29236	172
29416	227
29417	227

Order-No.	
29420	266
29422	302
29425	279
29427	279
29428	279
29429	279
29435	280
29436	280
29437	280
29438	280
29439	280
29440	280
29441	280
29442	280
29443	280
29463	248
29466	135
29467	170
29471	208
29472	208
29473	208
29474	208
29475	208
29485	280
29486	280
29487	280
29544	235
29550	280
29553	170
29554	170
29555	170
29556	170
29557	170
29558	170
29559	170
29560	170
30	
30050	232
30066	264
30361	139
30362	139
30363	139
30364	139
30365	139
30366	139
30372	189
30373	193
30404	189
30495	175
30700	139
30701	139
30715	139
30716	139
30824	123
30826	270
30827	268
30852	170
30975	268
30976	268
30978	270
30979	270
31	
31233	210
31234	210
31235	210
31236	210
31237	210
31238	210
31239	210

Order-No.	
31240	210
31241	210
31242	210
31243	210
31244	210
31432	158
31439	302
31496	189
31497	189
31498	193
31499	193
31771	141
31863	139
31901	158
31957	237
31958	237
31959	237
31960	236
31961	236
31962	236
31973	238
31975	238
31977	238
32	
32055	234
32070	234
32071	234
32105	236
32151	158
32152	158
32153	158
32154	158
32155	158
32156	158
32157	158
32160	248
32161	249
32201	141
32249	142
32250	146
32251	146
32252	146
32253	146
32254	146
32255	146
32256	146
32264	147
32265	147
32278	157
32279	157
32281	135
32282	135
32298	188
32299	237
32302	237
32303	237
32304	237
32305	237
32306	237
32307	237
32308	237
32309	238
32310	249
32311	249
32312	159
32313	159
32314	159
32315	159
32318	288

Order-No.	
32319	271
32320	271
32322	272
32323	272
32324	272
32325	288
32326	288
32327	288
32328	272
32329	288
32330	274
32332	274
32334	288
32335	289
32336	289
32338	289
32340	289
32342	275
32343	289
32344	289
32345	261
32346	288
32347	288
32349	282
32352	276
32383	146
32384	146
32386	210
32387	210
32388	210
32389	210
32390	210
32391	210
32392	210
32393	210
32394	202
32395	202
32396	139
32397	139
32399	146
32400	146
32404	150
32405	150
32406	150
32409	237
32410	237
32411	237
32412	237
32413	237
32414	237
32415	237
32416	237
32417	237
32418	237
32419	237
32421	237
32423	237
32477	246
32484	249
32486	238
32490	237
32491	237
32492	237
32493	237
32494	237
32495	237
32496	237
32497	237
32505	242

Order-No.	
32547	245
32556	245
32573	245
32686	237
32687	237
32688	237
32689	237
32804	240
32805	240
32806	240
32807	240
32808	240
32809	240
32867	150
32868	150
32869	150
32870	150
32871	150
32901	182
32902	182
32903	182
33	
33007	182
33008	182
33009	182
33177	254
33178	258
33186	256
33232	303
33259	257
33261	257
33471	287
33472	287
33503	192
33504	123
33505	123
33507	282
33520	260
33521	283
33699	239
33700	239
33701	239
33702	239
33703	236
33704	236
33705	236
33706	237
33707	237
33708	237
33709	237
33710	237
33711	237
33712	237
33713	237
33714	237
33715	237
33716	238
33717	237
33718	237
33719	237
33720	237
33721	237
33722	237
33723	238
33724	238
33725	237
33726	237
33727	237
33728	237

Order-No.	
33729	238
33730	238
33731	238
33732	238
33736	182
33738	182
33740	182
33741	182
33743	182
33744	182
33746	182
33749	210
33750	210
33753	201
33754	201
33764	182
33765	247
33841	265
33842	265
33843	265
33844	265
33848	192
33920	238
33921	238
33922	238
33923	238
33924	238
33925	238
33926	238
33927	238
33928	238
33929	238
33930	238
33931	238
33932	238
33961	236
33962	236
33963	236
33964	236
33965	236
33966	236
33969	114
33970	122
33971	122
34	
34306	247
34307	270
34308	270
34309	272
34310	274
34311	268
34312	275
34313	261
34452	237
34453	237
34454	237
34455	237
34456	237
34457	237
34515	272
34516	268
34518	276
34533	169
34554	239
34555	239
34556	239
34557	239
34558	239
34559	239

Order-No.	
34560	239
34565	270
34566	271
34567	271
34568	274
34569	272
34570	272
34571	268
34577	137
34578	137
34578	167
34579	137
34579	167
34580	137
34580	167
34581	137
34581	167
34582	137
34582	167
34583	137
34583	167
34584	137
34584	167
34585	137
34585	167
34586	137
34586	167
34587	137
34587	167
34588	137
34588	167
34589	137
34589	167
34590	137
34590	167
34614	168
34686	229
34688	278
34689	278
34690	278
34691	278
34692	278
34693	278
34694	278
34695	278
34696	278
34697	278
34698	278
34699	278
34700	278
34701	278
34702	278
34703	278
34704	278
34705	278
34706	278
34707	278
34708	267
34729	260
34730	260
34736	203
34737	203
34738	203
34740	201
34741	201
34742	204
34743	259
34744	259
34745	141

Order-No.	
34746	234
35	
35378	141
35389	134
35390	138
35391	138
35392	138
35393	138
35394	138
35395	138
35396	138
35397	150
35398	150
35399	150
35400	243
35401	243
35402	243
35403	243
35446	138
35456	236
35457	236
35462	258
35465	256
35477	258
35479	259
35480	198
35481	198
35482	208
35483	208
35484	208
35485	208
35486	208
35487	208
35488	208
35489	208
35490	208
35501	138
35502	138
35503	138
35504	138
35505	138
35506	137
35506	167
35507	137
35507	167
35508	137
35508	167
35509	137
35509	167
35510	137
35510	167
35511	137
35511	167
35538	263
35704	259
35705	259
35709	234
35820	287
35832	234
35834	234
35861	264
35862	264
35870	166
35969	263
36	
36038	275
36039	275
36040	276
36041	276

Wiha order number register

Order-No.	
36050	262
36051	263
36052	263
36053	263
36071	137
36071	167
36072	150
36073	150
36079	166
36082	240
36085	150
36086	240
36092	247
36093	247
36094	247
36112	248
36114	186
36189	273
36193	240
36205	144
36217	260
36218	278
36219	278
36220	278
36221	278
36222	278
36223	278
36224	278
36225	278
36226	278
36229	169
36230	169
36231	169
36233	169
36234	169
36235	169
36236	169
36237	169
36238	169
36239	169
36240	169
36272	278
36275	234
36280	234
36282	234
36285	234
36288	234
36310	230
36320	169
36321	169
36327	237
36329	138
36330	138
36331	134
36332	134
36333	134
36388	121
36389	113
36390	121
36414	171
36415	171
36417	171
36418	171
36421	171
36452	208
36453	198
36454	198
36455	134
36456	204

Order-No.	
36457	203
36458	204
36459	204
36460	203
36461	203
36462	204
36483	273
36486	202
36487	202
36503	201
36504	201
36521	197
36522	197
36536	138
36537	138
36538	138
36539	138
36540	138
36541	138
36542	138
36558	134
36711	260
36791	162
36794	287
36800	246
36846	169
36847	169
36849	168
36850	168
36851	175
36852	175
36886	168
36887	168
36888	168
36951	227
36975	278
36976	278
36977	278
36978	278
36979	278
36980	278
36981	260
36985	275
36986	275
36987	276
36988	276
36990	227
37	
37067	303
37137	112
37147	137
37147	167
37222	137
37222	167
37223	137
37223	167
37224	137
37224	167
37225	137
37225	167
37226	137
37226	167
37227	137
37227	167
37351	197
37352	197
37402	273
37403	273
37450	260

Order-No.	
37871	141
37872	141
38	
38020	114
38060	268
38074	163
38189	268
38190	268
38191	254
38362	134
38370	237
38371	237
38372	237
38552	253
38556	174
38557	174
38558	174
38600	182
38601	182
38605	182
38606	182
38610	180
38611	180
38612	180
38613	180
38616	174
38617	174
38618	174
38619	174
38620	174
38621	174
38622	174
38627	253
38631	260
38632	260
38633	254
38636	259
38637	252
38649	234
38650	234
38651	234
38652	234
38653	234
38654	234
38656	234
38657	234
38658	234
38659	234
38660	234
38661	234
38676	240
38677	240
38679	240
38680	240
38681	240
38684	240
38685	240
38686	240
38687	240
38688	240
38689	240
38690	240
38706	240
38707	240
38708	240
38709	240
38710	240
38711	240
38712	240

Order-No.	
38713	240
38714	240
38715	240
38716	240
38717	240
38718	240
38798	263
38800	174
38801	174
38802	174
38803	174
38804	174
38805	174
38806	174
38807	174
38808	174
38809	174
38810	174
38811	174
38812	174
38813	174
38814	174
38815	174
38816	174
38817	174
38818	174
38819	174
38820	174
38853	253
38854	253
38855	256
38856	256
38857	258
38858	258
38859	258
38860	254
38861	254
38865	259
38866	259
38867	260
38918	165
38919	165
38920	165
38921	165
38925	165
38926	165
38927	165
38928	165
38929	165
38930	165
38931	165
38932	165
38933	165
38934	165
38935	165
38936	165
38937	279
38938	279
38981	268
38982	268
38983	268
38984	254
38985	264
38986	264
39	
39008	299
39010	299
39012	299
39014	299

Order-No.	
39017	299
39019	299
39021	299
39022	299
39027	279
39029	228
39037	228
39039	228
39040	228
39041	228
39045	228
39049	228
39056	228
39057	228
39059	229
39060	229
39061	229
39076	186
39078	228
39082	229
39083	229
39091	276
39093	276
39094	276
39095	276
39104	203
39105	203
39106	211
39107	211
39108	211
39109	211
39110	211
39111	211
39112	211
39113	211
39114	211
39115	211
39116	211
39117	211
39118	211
39124	228
39133	246
39134	246
39149	300
39150	300
39151	300
39152	300
39178	239
39179	239
39180	239
39181	239
39182	239
39183	239
39184	237
39185	237
39186	237
39187	237
39188	238
39189	238
39190	238
39191	238
39192	238
39193	238
39194	238
39195	238
39196	238
39197	238
39198	238
39199	238

Order-No.	
39200	238
39201	238
39202	238
39203	238
39204	238
39205	197
39206	239
39207	239
39208	239
39374	281
39375	281
39376	281
39377	281
39378	281
39379	281
39380	281
39381	281
39382	233
39875	232
39964	242
39971	241
40	
40282	116
40331	248
40342	265
40401	208
40402	208
40403	208
40404	208
40405	208
40406	208
40407	208
40408	208
40409	208
40410	199
40411	199
40461	236
40462	236
40463	236
40464	236
40465	236
40523	110
40600	241
40601	241
40602	241
40603	241
40604	241
40605	241
40606	241
40607	241
40608	241
40609	241
40610	241
40611	241
40612	241
40613	241
40614	241
40615	241
40616	241
40617	241
40618	241
40619	241
40620	241
40621	241
40622	241
40623	241
40624	241
40625	241
40626	241

Order-No.	
40627	241
40628	242
40629	242
40630	242
40631	242
40632	242
40633	242
40634	242
40635	242
40636	242
40637	242
40638	242
40639	242
40640	242
40641	242
40642	242
40643	242
40644	242
40645	242
40646	242
40647	242
40648	242
40649	242
40650	242
40651	242
40652	242
40653	242
40654	242
40655	242
40656	242
40657	242
40658	242
40659	242
40660	242
40661	242
40662	249
40663	242
40674	163
40709	257
40712	277
40713	277
40906	181
40913	269
40919	269
40920	269
40921	255
40922	255
40923	275
40927	257
40948	116
40966	211
40967	211
40968	211
40969	211
40970	211
40971	211
40972	211
40973	211
40974	211
40975	211
40976	211
40977	211
40978	211
40979	202
40980	202
41	
41002	142
41003	133
41015	287

Order-No.	
41141	138
41142	138
41143	138
41144	138
41145	138
41146	138
41147	138
41157	180
41158	180
41159	137
41159	167
41160	137
41160	167
41218	257
41219	257
41220	277
41221	277
41222	287
41223	115
41230	136
41231	132
41232	132
41233	132
41234	180
41235	180
41241	113
41245	134
41246	265
41261	269
41266	269
41272	269
41273	269
41274	255
41275	255
41277	269
41278	269
41279	255
41280	255
41286	128
41289	301
41301	269
41307	269
41308	269
41309	255
41310	255
41311	269
41317	269
41318	269
41319	255
41320	255
41321	269
41327	269
41328	269
41329	255
41330	255
41341	164
41342	164
41343	164
41344	164
41345	164
41384	181
41385	181
41476	164
41477	164
41478	164
41479	164
41483	196
41484	196
41585	226

Wiha order number register

Order-No.	
41586	226
41587	226
41588	226
41589	226
41590	226
41591	226
41592	226
41593	226
41594	226
41595	226
41596	226
41597	226
41598	225
41599	225
41600	225
41601	225
41602	225
41603	225
41604	225
41605	225
41606	225
41607	225
41608	225
41609	225
41610	225
41611	225
41612	225
41613	225
41614	225
41621	225
41622	225
41623	225
41624	226
41625	226
41626	226
41627	226
41628	226
41629	226
41630	226
41631	226
41632	226
41633	226
41634	226
41635	226
41636	226
41637	225
41638	225
41639	225
41640	225
41641	225
41642	225
41643	225
41644	225
41645	225
41646	225
41647	225
41648	225
41649	225
41650	225
41651	225
41652	225
41653	225
41660	225
41662	225
41663	225
41824	225
41825	225
41826	225
41827	227

Order-No.	
41828	227
41829	227
41830	224
41831	224
41832	226
41833	226
41834	226
41894	207
41895	207
41896	207
41897	207
41898	207
41899	207
41900	207
41901	207
41902	207
41911	126
41912	126
41913	127
41914	127
41915	127
41922	247
41923	266
41973	207
41974	207
41975	207
41976	207
41977	207
41978	207
41979	196
41980	196
42	
42062	262
42068	303
42069	108
42071	301
42074	302
42086	129
42096	224
42097	222
42098	223
42099	222
42100	224
42101	224
42102	224
42103	224
42104	224
42105	224
42106	224
42107	224
42108	224
42109	224
42110	224
42111	224
42112	224
42113	224
42114	222
42115	222
42116	222
42117	222
42118	222
42119	222
42120	222
42121	222
42122	222
42123	222
42124	222
42125	222
42126	222

Order-No.	
42127	222
42128	222
42129	222
42130	222
42131	222
42132	222
42133	222
42134	222
42135	223
42136	223
42137	223
42138	223
42139	223
42149	224
42150	224
42162	262
42210	136
42210	166
42211	136
42211	166
42212	136
42212	166
42213	136
42213	166
42214	136
42214	166
42374	140
42375	140
42376	140
42377	140
42378	140
42379	140
42380	140
42381	152
42382	152
42383	152
42384	152
42385	152
42386	152
42387	152
42388	152
42389	152
42390	152
42391	152
42392	152
42393	152
42394	152
42395	152
42397	152
42398	152
42399	152
42401	152
42402	152
42403	152
42413	152
42414	152
42415	152
42416	152
42418	152
42419	152
42421	153
42422	153
42423	153
42424	153
42425	153
42426	153
42431	153
42432	153
42433	153

Order-No.	
42434	153
42435	153
42436	153
42437	153
42438	153
42439	153
42440	153
42441	153
42442	153
42443	153
42444	153
42445	153
42446	153
42447	153
42449	153
42450	153
42451	153
42452	153
42453	153
42454	153
42455	153
42456	153
42457	153
42458	153
42459	153
42460	153
42461	153
42462	153
42463	153
42464	152
42465	152
42466	152
42467	152
42468	152
42469	152
42470	152
42471	140
42474	152
42475	152
42476	152
42477	152
42478	152
42479	152
42480	152
42481	152
42482	152
42483	152
42484	152
42485	152
42486	152
42487	152
42488	152
42489	152
42490	152
42491	152
42492	152
42493	152
42494	152
42501	152
42502	152
42503	152
42504	152
42505	152
42506	152
42507	153
42989	136
42990	145
42991	145
42992	145

Order-No.	
42993	145
42994	145
42996	145
42997	145
42998	145
43	
43022	118
43023	117
43024	117
43026	118
43027	118
43028	118
43029	118
43030	118
43031	118
43032	118
43033	118
43034	118
43035	118
43036	118
43037	118
43038	118
43039	118
43041	118
43042	118
43043	118
43044	118
43052	120
43053	120
43055	120
43056	120
43057	120
43058	120
43061	118
43062	119
43063	119
43065	119
43066	119
43067	119
43068	119
43069	119
43070	119
43071	119
43072	119
43073	119
43074	119
43075	119
43076	119
43077	119
43078	119
43079	119
43080	119
43081	119
43082	119
43083	119
43084	119
43085	119
43086	119
43087	119
43088	119
43089	119
43090	119
43091	119
43092	119
43093	119
43094	119
43095	119
43096	119
43097	119

Order-No.	
43098	119
43099	119
43100	120
43101	120
43102	120
43103	120
43104	120
43105	120
43106	120
43107	120
43108	120
43125	262
43128	166
43177	165
43240	273

Wiha article number register

Art.-No.	
22	
2270P	140
2271P	140
227P	136
24	
246	119
246	302
246 22 02	263
246 67	186
246 75 SB	262
246 76 SB	263
246 77 SB	263
246 78 SB	263
246 80 SB	263
24618	119
24619	120
246199	118
24636	245
24636 B5	245
25	
255-11	141
255-12	141
255-3	141
255-7	141
26	
260P	145
260P	145
260P	152
261P	152
262P	152
263P	145
263P	153
264P	145
264P	153
264P Zoll	153
265P	145
265P	153
265P Zoll	153
266P	152
266PY	152
267P	145
267P	145
267P	152
267PIP	152
267PR	145
267PR	152
268P	153
269	193
269	193
269	193
269	193
269	193
269	193
269 T11	191
269 T11 01	191
269 T4	191
269 T6	191
269 T6 01	191
2691	193
2691 T11 ESD	193
2691ESD	193
27	
272	159
272 K6	157
273	159
274	159
275	159
275 K6	157
276	159
277	159
277 K6	157
278	159
278 K6	157
278IP	159
278R	159
279-10	158
28	
2804	249
281 01	248
281 02	248
281 B11	187
281 T11	187
281 T6	188
281 T6 01	188
281-01ESD	249
2831 09 020	180
2831 09 021	180
2831 09 022	180
2831 09 023	180
2831 T18	132
2831 T9 01	132
2831 T9 02	132
283100	137
2831-10	137
2831-10	167
2831-11	137
2831-11	167
2831-12	137
2831-12	167
2831-13	137
2831-13	167
2831-14	137
2831-14	167
2831-15	137
2831-15	167
2831-17	137
2831-17	167
2831-18	137
2831-18	167
2831-B604	136
2831-B604	166
2831-B605	136
2831-B605	166
2831-B606	136
2831-B606	166
2831-B607	136
2831-B607	166
2831-B608	136
2831-B608	166
28352	168
28360	174
283693	174
283695	174
283696	174
283793	165
283794	165
283795	165
284	189
284	190
284	190
284	190
284	190
284	190
284	190
284	190
284	190
284ESD	189
284ESD T6 01	189
2850	169
2850	169
2852	168
2852 S10	168
2852 S10-01	168
2859	171
28590	170
28591	170
28592	170
28593	171
28594	171
28595	170
28595R	170
28596	170
28596R	170
28597	171
285992	171
285994	171
2872	163
2872 S3	163
2872 S3	163
2872 T13	163
2872 T18	162
2879 B7	166
28799	166
28799	166
2882	175
2882 S10	175
2891	172
2893	172
2893 S01	172
2899	165
2899	173
28993	173
28995	173
28996	173
28999	173
28999	173
29	
2909101	129
2920	169
2933	165
2970	164
29701 080 S4	164
29701 200 S4	164
29701 280 S4	164
29701 S5	164
30	
300-2	151
301-2	151
302	146
302	146
302	151
302 HK 601	142
302 HK12	142
302 HK6 SO	142
302 ZK6 SO	142
3021	150
302ESD	158
302ESD	158
302ESD HK5 01	157
308	151
308 HK6	143
308 ZK6	143
31	
311	146
311	151
3111	150
311ESD	158
311ESD	158
312	151
313	146
313	151
3131	150
313ESD	158
313ESD	158
314	151
32	
3201	138
3201 K12	133
3201 K6	134
3201 K601	134
3201 ZK6	134
320N	139
320N K6	135
320N K7	135
320N ZK6 SO	135
3211	138
321N	139
322	140
322 K5	135
323N	139
324	139
3241	138
325	139
3251	138
3251 K6	134
3251 TR	138
3251 TR K6	134
327	139
3271	138
328	139
3281	138
33	
331	218
334	214
334 VB	205
334 Zoll	216
334DS	213
334DS K6	204
334DSR	213
334N	216
334R	214
334R VB	205
336	215
336 Zoll	216
336N	216
338	215
34	
341	148
341 K5	143
343	148
344	149
347	149
347 Zoll	148
35	
350	210
350 H7	200
350 H9	200
351 PG7	185
351 PG9X	183
351 PK7	185
352 H7B	200
352 H9B	200
352 HM5B	200
352B	209
356	147

Art.-No.	
357	148
3581	138
358N	139
36	
361IP	204
361IP	212
362	147
362 K6 SO	142
362 K7	142
362BE	146
362BE K6	142
362ESD	158
362ESD K5	157
362IP	147
362R	146
362R K6 SO	142
362RIP	147
362TR	147
362TR K6	142
363	203
363	211
363 H7	203
363 P7	184
363 P8	183
363 VB	205
363TR	204
363TR	212
363TR P7	184
363TR P8	184
364	217
364 VB	205
364DS	213
364DS K6	204
364IP	217
364R	217
365	218
365 VB	206
365IP	218
365IP VB	206
366	203
366	203
366	211
366 H7	203
366 TS	211
366BE	202
366BE	202
366BE	210
366BET	202
366BET	211
366R	201
366R	201
366R	201
366R	210
366TS	203
367	147
367R	147
369	197
369	198
369	198
369	199
369	199
369	208
369 Zoll B	209
369B	199
369B	199
369B	209
369F	196
369F	207
369K	199

Art.-No.	
369K	208
369R	197
369R	207
369R P7	185
369R Zoll	207
369RF	196
369RF	207
369RZ	197
369T	198
369T	208
369Z	208
369ZB	198
369ZB	199
37	
370	218
370 VB	206
370IP	218
371RIP	212
371RIP H8	204
371RIP HM7	204
372	149
38	
3801 01	182
3801 02	182
3801 03	182
3801 04	182
3803 02 020	182
3803 02 021	182
3803 04 007	181
3803 04 013	181
3809 01 01	182
3809 01 02	182
3809 01 03	182
384	248
386	248
387 01	248
387 02	248
387ESD	249
388	249
388DS	249
39	
397	150
398	150
40	
400 10	154
405	157
405 11	156
41	
410 1000	303
410 2000	303
410 2001	303
410 2005	303
410 2007	303
4102008	303
411 170 1	302
411 210 2	302
411 210 8	302
411 320 3	302
43	
430 40	154
50	
500	154
509	154
53	
530	150
530 HK6	144
530 ZK6	144
531	150
532	150

Art.-No.	
54	
540	214
540DS	213
55	
5520	155
5520 HK6	155
5520 ZK6	155
5521	155
5522	156
5525	156
5527	156
5527 K6	155
5528	156
5533	156
5533 HK5	155
5533 ZK5	155
5534	156
5535	156
5590N	118
5590N T20	118
59	
590 T101	126
590 T102	126
590 T103	127
599001	127
599002	127
70	
7000 4 Z	241
7000 EB16 ESD	192
7000 EB26 ESD	192
7000 SK65 ESD	241
7001 4 Z	241
7003 4 Z	241
7005 4 Z	242
7009 4 Z	242
7010 Z	231
7011 DWS	233
7011 DWS	235
7011 Z	231
7012 Z	231
7013 Z	232
7013 Z TR	232
7013R Z	232
7015 Z	231
7015 Z TR	231
7015K Z	231
7016 Z	231
7016 Z IPR	232
7017 Z	232
7017R Z	232
7018 Z	232
7019 Z SIT	232
7019 Z SP	232
7019 Z TS	232
7019 Z TW	233
7019 Z XZN	232
7040 Z	236
7041 Z	236
7042 Z	237
7043 Z	239
7043R Z	238
7044	244
7044 4 Z	242
7044 M	244
7045 Z	237
7045 Z TR	238
7045BE	237
7045BE 9570	240
7045R	237

Art.-No.	
7046 Z	238
7047R Z	238
7048 Z	239
7049 TS	239
7049XH	237
7049XZ	237
71	
710100	242
7103	242
7110 HM	248
7110M	242
7113	247
7113 P	247
7113 S	247
7113 S	247
7123	246
7140	247
7142	247
7143	247
7148 CF	246
7148 CS	246
7148C	246
7148ST	247
7183	248
72	
7201	245
7203	245
7204Z-516	245
7207N	119
7207N	120
7207N	120
7207N K2001	117
7208N	119
7208N	120
7208N	120
7208N K2001	117
7210	244
7240	245
73	
7311 Z	243
7312 Z	243
7321 Z	243
7322 Z	243
7325 Z	243
7331 Z	243
7332 Z	243
7341 Z	243
7342 Z	243
78	
7802	190
7803	190
7804	243
7805	243
7806	244
7807	244
79	
79186 B5	244
79187 B5	243
79187 T04	115
7928-913	229
7928-923	229
7928-928	230
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235

Wiha article number register

Art.-No.	
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7929 Z	235
7930 Z	236
7930 Z	236
7930 Z	236
7930 Z	236
7930 Z	236
7945	227
7947-005	228
7947-505	228
7947-505TR	228
7947-902	228
7947-904	228
7947-905	228
7947-995	228
7947-999	228
7948-005	227
7948-043	227
7948-927	227
7979-01	230
7979-02	230
7979-03	230
80	
800	299
800	299
8001	299
8001K	300
800K	300
800S	300
802	299
8021	299
82	
829-0	298
83	
830-0	298
831-1	297
831-3	297
831-5	297
831-8	297
831-9	298
832 B8	294
832-13	295
832-15	295
832-33	295
832-35	295
832-38	296
832-39	296
832-55	296
832-99	296
833-1	297
833-5	297
834-15	295
84	
846	301
93	
9300-012-01	116
9300-013-02	116
9300-015	123
9300-016	123
9300-018	114
9300-019	122
9300-020	122
9300-024	121
9300-025	113
9300-026	121

Art.-No.	
9300-030	112
9300-031	114
9300-035	113
9300-702	110
9300-704	108
SB	
SB 246 01	186
SB 246 02	186
SB 246 70	128
SB 246 81	186
SB 255-11	141
SB 255-12	141
SB 255-3	141
SB 255-7	141
SB 2831 0101	136
SB 3021 S2	144
SB 3201 S201	134
SB 3201 S202	134
SB 3201 S204	134
SB 327 S2	135
SB 328 S2	135
SB 351 PM8X	183
SB 3803 04 02001	181
SB 400 10	154
SB 430 40 K10	154
SB 430 40 K1020	154
SB 430 4010	154
SB 534S5	301
SB 7945-TY202	223
SB 7945-TY303	223
SB 7945-TY505	223
SB 7945-TY903	223
SB 7945-TY904	223
SB 7945-TY905	223
SB 7946-TY202	222
SB 7946-TY303	222
SB 7946-TY505	222
SB 7946-TY903	222
SB 7946-TY904	222
SB 7946-TY905	222
SB 7947-005	228
SB 7947-505	228
SB 7947-505TR	228
SB 7947-902	229
SB 7947-904	229
SB 7947-905	229
SB 7947-995	229
SB 7947-999	229
SB 7947-T303	225
SB 7947-T906	225
SB 7947-T999	225
SB 7947-Y202	227
SB 7947-Y505	227
SB 7947-Y904	227
SB 7948-T950	224
SB 7948-T999	224
SB 7948-Y505	226
SB 7948-Y904	226
SB 7948-Y950	226
SB246176	262
SB24628	249
SB24629	249
U	
U 106	190
U106 T12	188
U106 T8	188
Z	
Z 01 0 01	270
Z 01 0 02	270

Art.-No.	
Z 01 0 05	270
Z 01 0 06	256
Z 01 0 09	256
Z 01 0 16	257
Z 02 0 01	271
Z 02 0 02	271
Z 02 0 05	271
Z 02 0 06	256
Z 02 0 09	256
Z 02 2 01	257
Z 02 2 02	257
Z 05 0 01	272
Z 05 0 02	272
Z 05 0 05	271
Z 05 0 06	258
Z 05 0 09	258
Z 05 1 01	273
Z 05 1 02	272
Z 05 1 05	272
Z 05 1 06	258
Z 05 1 09	258
Z 06 0 16	257
Z 07 0 01	274
Z 07 0 02	274
Z 07 0 05	274
Z 07 0 06	259
Z 09 0 01	274
Z 09 0 02	274
Z 09 0 05	274
Z 09 0 06	259
Z 12 0 01	269
Z 12 0 02	268
Z 12 0 05	268
Z 12 0 06	254
Z 12 0 09	254
Z 14 0 06	254
Z 14 1 01	253
Z 14 1 06	253
Z 15 0 01	273
Z 16 2 01	269
Z 16 3 02	269
Z 16 3 05	269
Z 16 3 06	255
Z 16 3 09	255
Z 17 0 01	276
Z 18 0 01	268
Z 18 0 02	268
Z 18 0 05	268
Z 18 0 06	254
Z 21 0 01	275
Z 21 0 02	275
Z 21 0 05	275
Z 21 0 06	260
Z 22 0 01	276
Z 22 0 02	276
Z 22 0 05	276
Z 22 0 06	260
Z 23 1 01	276
Z 23 1 05	276
Z 25 0 01	275
Z 26 0 00	280
Z 26 1 00	280
Z 26 2 00	280
Z 27 0 01	281
Z 27 0 01K	281
Z 30 0 01	277
Z 31 0 00	277
Z 31 0 01	277
Z 32 0 01	277

Art.-No.	
Z 32 0 10	277
Z 33 0 01	279
Z 33 1 01	279
Z 33 4 01	278
Z 33 5 01	278
Z 34 0 01	279
Z 34 1 01	279
Z 34 4 01	278
Z 34 5 01	278
Z 36 0 01	273
Z 36 0 03	287
Z 36 0 04	285
Z 36 1 03	287
Z 36 1 04	285
Z 37 0 04	285
Z 38 0 04	285
Z 40 0 03	286
Z 40 1 03	286
Z 40 1 04	283
Z 40 3 04	283
Z 40 4 04	283
Z 41 1 03	286
Z 41 1 04	283
Z 41 3 03	286
Z 41 3 04	283
Z 41 4 04	283
Z 41 6 03	286
Z 43 1 04	284
Z 44 1 04	284
Z 44 3 01	273
Z 44 3 04	284
Z 46 0 03	286
Z 46 0 03	287
Z 46 1 04	284
Z 46 4 04	284
Z 47 1 04	284
Z 47 2 04	285
Z 49 2 03	287
Z 49 7 03	287
Z 50 1 01	260
Z 50 1 06	259
Z 50 1 09	259
Z 55 0 01	261
Z 55 0 02	261
Z 55 0 05	261
Z 55 0 06	260
Z 55 0 09	260
Z 57 0 001 06K	262
Z 57 0 06 SB	262
Z 60 0 01	264
Z 60 0 01	264
Z 60 0 06	264
Z 60 0 06	264
Z 62 0 001 06	265
Z 62 0 002 06	265
Z 62 0 003 06	265
Z 62 0 004 06	265
Z 62 0 005 06 SB	265
Z 65 0 05	280
Z 65 2 05	280
Z 66 0 00	280
Z 71 5 06	266
Z 71 7 160 06 SB	266
Z 99 0 001 01	266
Z 99 0 001 04	282
Z 99 0 001 06	252
Z 99 0 001 09	252
Z 99 0 002 01	266
Z 99 0 002 05	267

Art.-No.	
Z 99 0 002 06	115
Z 99 0 004 01	267
Z 99 0 006 02	123
Z 99 0 007 01	267
ZP	
ZP 01 0 14	288
ZP 06 0 14	288
ZP 07 1 14	288
ZP 09 0 14	288
ZP 11 0 14	288
ZP 15 0 14	288
ZP 16 0 14	288
ZP 18 0 14	288
ZP 20 1 14	289
ZP 20 2 14	289
ZP 24 0 14	289
ZP 25 2 14	289
ZP 46 0 14	289
ZP 50 0 14	289
ZP 99 0 140 02	282

Notes

Legend

Drives

- Triangular nut
- Hex
- Square nut
- Hexagon socket
- Internal hexagon with drill hole (tamper-resistant)
- Tamper Resistant hex
- Countersink
- Combination drill bit
- Pentalobe PL
- Y-Type
- Phillips PH (cross-recessed)
- Pozidriv PZ (Phillips)
- Robertson
- Round tip
- Slotted
- Slotted nut
- SIT
- Spanner
- Twist drill
- Sliding sleeve
- Torq-Set®
- TORX®
- TORX® with drill hole (tamper-resistant)
- TORX PLUS®
- Tri-Wing®
- Multitooth
- Square reaming blade
- Xeno SL/PZ

Drives

- Square nut
- Square
- G7 drive system
- Threaded connector
- SDS-Plus®
- Hex

Screwdrivers [mm]

- Cut width
- Tip width
- Round blade dimension
- Hex blade
- Hex_bolster
- Scraper width
- Clip opening
- Tip width
- Head width, nut driver
- Blade length
- Shaft lengths
- Handle length
- Handle diameter
- Torque T-handle length
- Torque T-handle width
- max. Nm — Max. torque value [Nm]
- max. in.lbs. — Max. torque value [in.lbs]
- ±% — Accuracy [%]
- Cable key depth

L-keys [mm]

- Round blade dimension
- Hex blade
- Hex bolster
- Shaft lengths
- Blade length
- Side driver length T-handle
- Handle width
- Diameter

Bits [mm]

- Threaded connector
- Drill working length
- Screw size

Pliers [mm]

- Flat jaws
- Half round jaws
- Round jaws
- Cutter without bevel
- Cutter with small bevel
- Cutter with bevel
- Anvil cutter
- Center cutter
- Scissors cutter
- Front cutting edge in stripping pliers
- Ø mm — Max. diameter
- mm² — Max. cross-section
- Max. gripper pipe diameter
- Max. gripper width across flats
- External retaining ring
- Internal retaining ring
- Clamping range
- Opening width flat
- Cutting force
- with opening spring
- AWG — American Wire Gauge
- Saw blade length

Measurement tools [mm]

- Width of segments
- Colour
- Measurement capacity [mm]
- Measurement capacity in Inch

Electro

- Battery
- LED — LED lumens
- Laser light

Soft faced hammer [mm]

- Face diameter
- Hammer face width
- Hammer head width

General symbols

- g — Weight, g
- Diameter
- SB — Blister packed
- mm — Total length
- " — Total length in inch

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V.
ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company
Pozidriv= Registered Trademark of European Industrial Services Ltd.

Legend

Ranges

- Case strength
- Wheel-along case
- Case shape
- Case suitable for transport by air

Elektro

- Torque safety check
- Saves time

Screwdrivers

- MagicRing®
- MagicSpring®
- Ball end can swivel up to 25°
- slimTECHNOLOGY

Torque

- Precision: ±6%
- Accuracy ±10%
- slimTECHNOLOGY

L-keys

- MagicRing®
- MagicSpring®
- Ball end can swivel up to 25°
- TORX® ball end; can swivel up to 25°
- Visible in UV light

Bits

- Suitable for impact screwdrivers
- Lifespan 120 times longer
- Visible in UV light

Pliers

- Cutting-to-length diameter
- Skinning diameter length
- Automatic skinning
- DynamicJoint®
- Heavy-duty diagonal cutters
- OptiGrip
- MagicTips®
- BiCut® Power
- TriCut
- Inomic®

Impact tools

- Optimum weight distribution
- Soft hammer end
- Levers out nail clamp

Measurement tool

- Fully encased
- Visible from just 10°
- Visible in UV light

General information

- Recommended for electricians – non-insulated
- VDE-tested and certified
- CE marking
- ESD electronics mark

Subject to technical changes. All illustrations and graphics, specified dimensions and valuesand references to standards, e.g. DIN/EN, are non-binding.Any liability claims based on this will therefore be rejec ted. No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue. All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited. Our General Terms and Conditions (Terms of Sale, Deliveryand Payment) apply.
You will find our general terms and conditions at www.wiha.com

Wiha Werkzeuge GmbH
Obertalstraße 3–7
78136 Schonach/Germany
Phone +49 7722 959-0
Fax +49 7722 959-159 Inland
Fax +49 7722 959-155 Export
info.de@wiha.com
www.wiha.com

Wiha Tools Ltd.
17 The Courtyard
Buntsford Gate
Bromsgrove B60 3DJ
Phone +44 1527 57 57 58
+44 1527 91 09 86
Fax +44 1527 91 00 23
info.uk@wiha.com
www.wiha.com/en

Wiha France SARL
Z. A. de Terrefort
33520 Bruges/France
Phone +33 5 56 16 79 35
Fax +33 5 56 16 79 36
servicecommercial@wiha.fr
www.wiha.com/fr

Wiha Nordic A/S
Korskildelund 6
2670 Greve/Denmark
Phone +45 70 23 80 45
info.nordic@wiha.com
www.wiha.com

Wiha Iberia Willi Hahn S.A.
Av. del Rey Juan Carlos I, 98. 3°C
28916 Leganés/Madrid, Spain
Phone +34 91 693 85 11
Fax +34 91 693 63 83
iberia@wiha.com
www.wiha.com/es

Wiha Polska Sp. z o.o.
ul. Budowlanych 10b
80-298 Gdańsk/Poland
Phone +48 58 762 38 30
Fax +48 58 762 39 00
info.pl@wiha.com
www.wiha.com/pl

Wiha in Russia
Phone +48 58 762-38-30
Fax +48 58 762-39-00
michal.moczynski@wiha.com
www.wiha.com

Willi Hahn Corp.
1348, Dundas Circle
Monticello, MN 55362/USA
Phone +1 763 2 95 65 91
Fax +1 763 2 95 65 98
cservice@wihatools.com
www.wihatools.com

Wiha Tools Canada Ltd.
394 Deerhurst Drive
L6T 5H9, Brampton, ON
Phone +1 866 494 0096
Fax +1 800 494 7456
info@wihatools.ca
www.wihatools.ca

Wiha Asia Pacific Pte. Ltd.
25 International Business Park
#02 – 102 German Centre
Singapore 609916
Phone +65 6563 1277
Fax +65 6563 7168
info.sg@wiha.com
www.wiha.com

Wiha Tools (Shanghai) Co.Ltd.
Zone B No.1000
Jinsui Road Pudong
New District
Shanghai 201206
China
Phone +86 21 6440 1119
Fax +86 21 6440 1112
info@wiha.com.cn
www.wiha.com.cn

Wiha Finland Oy
Mäkituvantie 9
FI-01510 Vantaa Finland
Phone +358 44 231 9988
raija.helin@wiha.com
www.wiha.com

Wiha en Belgique
Phone +32 49 35 054 50
info.belux@wiha.com
www.wiha.com

Wiha in Nederland
Phone +31 64 63 113 30
info.nl@wiha.com
www.wiha.com/nl

Wiha in Italia
Thoelke Rappresentanze Srl
Phone +39-0332-966039
info.it@wiha.com
www.wiha.com/it

Premium Tools Australia Pty Ltd.
PO Box 63
Bargo, NSW 2574
Phone +61 02 4664 1460
Fax +61 02 8088 7272
sales@wiha.com.au
www.wiha.com.au

Premium Tools (NZ) Ltd.
Unit 5C 89 Ellice Road
Wairau Valley
Auckland, New Zealand
Phone +64 09 444 2560
Fax +64 09 355 0411
sales@wiha.co.nz
www.wiha.co.nz

Robert Rieffel AG
Widenholzstrasse 8
8304 Wallisellen/Switzerland
Phone +41 44 877 33 33
Fax +41 44 877 33 22
info@rieffel.ch
www.rieffel.ch

Technical modifications reserved!
Art.Nr.99999240 | FB MA 1818-10/2018-5.5 | Printed in Germany | EN

wiha
Tools that work for you